



IFW

PTO/SB/21 (09-04)

Approved for use through 07/31/2006. OMB 0651-0031

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**TRANSMITTAL  
FORM**

(to be used for all correspondence after initial filing)

Total Number of Pages in This Submission

Application Number 10/803078

Filing Date March 18, 2004

First Named Inventor Kia Silverbrook

Art Unit

Examiner Name

Attorney Docket Number FPD006US

**ENCLOSURES (Check all that apply)**

<input type="checkbox"/> Fee Transmittal Form	<input type="checkbox"/> Drawing(s)	<input type="checkbox"/> After Allowance Communication to TC
<input type="checkbox"/> Fee Attached	<input type="checkbox"/> Licensing-related Papers	<input type="checkbox"/> Appeal Communication to Board of Appeals and Interferences
<input type="checkbox"/> Amendment/Reply	<input type="checkbox"/> Petition	<input type="checkbox"/> Appeal Communication to TC (Appeal Notice, Brief, Reply Brief)
<input type="checkbox"/> After Final	<input type="checkbox"/> Petition to Convert to a Provisional Application	<input type="checkbox"/> Proprietary Information
<input type="checkbox"/> Affidavits/declaration(s)	<input type="checkbox"/> Power of Attorney, Revocation Change of Correspondence Address	<input type="checkbox"/> Status Letter
<input type="checkbox"/> Extension of Time Request	<input type="checkbox"/> Terminal Disclaimer	<input type="checkbox"/> Other Enclosure(s) (please identify below):
<input type="checkbox"/> Express Abandonment Request	<input type="checkbox"/> Request for Refund	
<input type="checkbox"/> Information Disclosure Statement	<input type="checkbox"/> CD, Number of CD(s) _____	
	<input type="checkbox"/> Landscape Table on CD	
<input checked="" type="checkbox"/> Certified Copy of Priority Document(s)	<b>Remarks</b>	
<input type="checkbox"/> Reply to Missing Parts/Incomplete Application	Email: kia.silverbrook@silverbrookresearch.com	
<input type="checkbox"/> Reply to Missing Parts under 37 CFR 1.52 or 1.53	Telephone: 61-2-9818 6633	
	Facsimile : 61-2-9555 7762	

**SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT**

Firm Name			
Signature			
Printed name	Kia Silverbrook		
Date	December 28, 2005	Reg. No.	

**CERTIFICATE OF TRANSMISSION/MAILING**

I hereby certify that this correspondence is being facsimile transmitted to the USPTO or deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450 on the date shown below:

Signature			
Typed or printed name		Date	

This collection of information is required by 37 CFR 1.5. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to 2 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

**BEST AVAILABLE COPY**



Patent Office  
Canberra

I, LEANNE MYNOTT, MANAGER EXAMINATION SUPPORT AND SALES hereby certify that annexed is a true copy of the Provisional specification in connection with Application No. 2003901297 for a patent by SILVERBROOK RESEARCH PTY.LTD. as filed on 20 March 2003.

WITNESS my hand this  
Sixteenth day of March 2004

A handwritten signature in black ink, appearing to be 'L Mynott'.

LEANNE MYNOTT  
MANAGER EXAMINATION SUPPORT  
AND SALES



**CERTIFIED COPY OF  
PRIORITY DOCUMENT**

## **SYSTEMS AND APPARATUS**

### **FIELD OF INVENTION**

The present invention relates to an integrated printing and flat panel display unit.

The invention has been developed primarily as an integrated peripheral unit that is connectable to a personal computer such as Macintosh or IBM compatible PC. However, it will be appreciated by those skilled in the art that the invention is not limited to these applications.

### **BACKGROUND**

Flat panel displays are known. A popular technology presently in use is the Thin Film Transistor (TFT) Liquid Crystal Display (LCD), which comprises an array of liquid crystal pixel elements driven by respective thin film transistors. In each element, liquid crystal is sandwiched between glass plates. A backlight is positioned behind the LCD layer relative to a position from which the display will be viewed. A polarizing screen is placed between the backlight and the LCD layer, and another polarizing screen is positioned on the other side of the LCD layer. The polarizing screens are orientated to be orthogonally polarizing with respect to each other.

Using the corresponding TFT to alter a voltage applied to the liquid crystal element causes a change in its crystalline structure that correspondingly alters the polarization of light passing through the element from the backlight. This change in polarization causes a corresponding change in the amount of light transmitted through the polarizing screens and LCD element.

Multiple colors are dealt with by providing each pixel with multiple LCD pixel elements (usually red, green and blue) that can individually be controlled for each pixel, thereby allowing various color combinations.

The design and operation of TFT LCD screens is well known to those skilled in the art and so is not described in more detail in this document.

Typically, flat panel displays, including TFT LCD displays, are more expensive than Cathode Ray Tube (CRT) display of comparable performance. However, the relative lightness and compactness of flat panel displays (particularly in terms of front to back depth) make them particularly suitable for situations where a small footprint is desirable. They are ubiquitous in laptop computers, and have come down in price sufficiently for them to be attractive to many desktop computer users. The relatively shallow front to back depth means that the display can be pushed back further from the user than would be possible with a CRT in many situations, thereby allowing better viewing comfort. Flat panel displays also enable a user to utilize considerably smaller areas than would be possible with an equivalent CRT display, which can be important in situations where a wall, partition or divider is located close to a work area in which the display is to be situated.

Often, computer users wish to print a hard copy of documents, images, web pages and the like. Usually, a printer is provided as a peripheral device that can be connected to the computer using a suitable cable. Alternatively, the computer can be connected via a Local Area Network (LAN) or other communications network. Printers can be bulky, and tend to take up additional space in a user's work area. Where space is at a premium, such printers can be intrusive or at least inconvenient. In many cases where a flat panel display is selected, space is already at a premium, so printers can exacerbate the problem.

#### BRIEF DESCRIPTION OF DRAWINGS

Preferred embodiments of the invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 is a schematic of document data flow in a printing system;

Figure 2 is a more detailed schematic showing an architecture used in the printing system of Figure 1;

Figure 3 is a data representation of page element used in the printing system of Figure 1,

Figure 4 is a schematic showing CMOS drive and control blocks for use with the printer of Figure 1;

Figure 5 is a schematic showing the relationship between nozzle columns and dot shift registers in the CMOS blocks of Figure 4;

Figure 6 is a more detailed schematic showing a unit cell and its relationship to the nozzle columns and dot shift registers of Figure 5;

Figure 7 is a circuit diagram showing logic for a single printer nozzle in the printer of Figure 1;

Figures 8 to 13 are intentionally omitted;

Figure 14 is a perspective view of a flat panel display incorporating a printer, in accordance with the invention;

Figure 15 is a perspective view of the flat panel display of Figure 14, whilst printing a page;

Figure 16 is a rear perspective view of the flat panel display of Figure 14;

Figure 17 is a front elevation of the flat panel display of Figure 15;

Figure 18 is a right-hand side elevation of the flat panel display of Figure 15;

Figure 19 is a plan view of the flat panel display of Figure 15;

Figure 20 is a left-hand side elevation of the flat panel display of Figure 15;

Figure 21 is a rear elevation of the flat panel display of Figure 15;

Figure 22 is a perspective exploded view of the flat panel display of Figure 14;

Figure 23 is a rear perspective view of the flat panel display of Figure 14 with the stand detached;

Figure 24 is a rear perspective view of the flat panel display of Figure 14 with the rear cover removed;

Figure 25 is a rear perspective view of the flat panel display of Figure 14 with the shields removed;

Figure 26 is a rear perspective view of the flat panel display of Figure 14 showing the core electrical and electronic components;

Figure 27 is a perspective view of interconnected printed circuit boards used in the flat panel display of Figure 14;

Figure 28 is a perspective view of the print engine used in the flat panel display of Figure 14;

Figure 29 is a perspective view of the print engine of Figure 28, with some componentry removed to reveal the printhead;

Figure 30 is a vertical section along the centerline of the flat panel display of Figure 14;

Figure 31 is an enlarged detail view of the vertical section of Figure 30;

Figure 32 is an enlarged detail view of a vertical section of a second embodiment of a flat panel display incorporating a duplex printhead, in accordance with the invention;

Figure 33 is a vertical section along the centerline of a third embodiment of a flat panel display incorporating a multi-sheet paper feeder, in accordance with the invention;

Figure 34 is an enlarged detail view of the vertical section of Figure 33

Figure 35 is a rear perspective view of an alternative embodiment of a flat panel display including power and data connections in its base, in accordance with the invention;

Figure 36 is a rear perspective view of an alternative embodiment of a flat panel display including a power input, data inputs and data outputs in its base, in accordance with the invention;

Figure 37 is a rear perspective view of an alternative embodiment of a flat panel display including power and data connections in its base and an ink cartridge in its mounting plate, in accordance with the invention;

Figure 38 is a rear perspective view of an alternative embodiment of a flat panel display including an ink cartridge, a power input and data connections in its base, in accordance with the invention;

Figure 39 is a perspective view of a bi-lithic printhead for use in the flat panel display of Figure 14;

Figure 40 is a rear perspective view of the bi-lithic printhead of Figure 39;

Figures 41(a) to 41(d) show a side elevation, plan view, opposite side elevation and reverse plan view, respectively, of the bi-lithic printhead of Figure 39;

Figures 42 and 43 show enlarged end views of the bi-lithic printhead of Figure 39;

Figure 44 shows an enlarged detail plan view of one end of the bi-lithic printhead of Figure 39;

Figure 45 is a sectional view taken along line 45-45 in Figure 44;

Figure 46 is an enlarged detail perspective view of one end of the bi-lithic printhead of Figure 39;

Figure 47 is an enlarged detail perspective view of an opposite end of the bi-lithic printhead of Figure 39;

Figure 48 is an exploded perspective view of the bi-lithic printhead of Figure 39;

Figure 49 is a sectional view taken along line 49-49 in Figure 44;

Figure 50 is a schematic view showing the components of the flat panel display of Figure 14;

Figure 51 is a schematic view of a print engine chip incorporated in the flat panel display of Figure 14;

Figure 52 is a vertical sectional view of a single nozzle for ejecting ink, for use with the invention, in a quiescent state;

Figure 53 is a vertical sectional view of the nozzle of Figure 52 during an initial actuation phase;

Figure 54 is a vertical sectional view of the nozzle of Figure 53 later in the actuation phase;

Figure 55 is a perspective partial vertical sectional view of the nozzle of Figure 52, at the actuation state shown in Figure 54;

Figure 56 is a perspective vertical section of the nozzle of Figure 52, with ink omitted;

Figure 57 is a vertical sectional view of the of the nozzle of Figure 56;

Figure 58 is a perspective partial vertical sectional view of the nozzle of Figure 52, at the actuation state shown in Figure 53;

Figure 59 is a plan view of the nozzle of Figure 52;

Figure 60 is a plan view of the nozzle of Figure 52 with the lever arm and movable nozzle removed for clarity;

Figure 61 is a perspective vertical sectional view of a part of a printhead chip incorporating a plurality of the nozzle arrangements of the type shown in Figure 52.

#### DETAILED DESCRIPTION OF PREFERRED EMBODIMENT

As shown in Figure 1, in the preferred embodiment, the printing aspect of the invention is embodied in an A4/Letter printer 100 that prints documents supplied by a computer system 102. The computer system 102 is programmed to perform various steps involved in printing a document, including receiving the document (step 103), buffering it (step 104) and rasterizing it (step 106), and then compressing it (step 108) for transmission to the printer 100.

The compressed, multi-layer page image is buffered (step 110) upon receipt in the printer 100, then expanded (step 112). The expanded contone layer is dithered (step 114) and then the black layer from the expansion step is composited over the dithered contone layer (step 116). Coded data can also be rendered (step 118) to form an additional layer, to be printed (in the preferred form) using an infrared ink that is substantially invisible to the human eye. The black, dithered contone and infrared layers are combined (step 120) to form a page that is supplied to a printhead for printing (step 122). In the preferred embodiment, the printhead is a bi-lithic printhead configured to print in 6 colors in a pagewidth format,

although the design can be adapted to print using any desired number of colors, and can be monolithic or require multiple substrates depending upon implementation.

The preferred embodiment divides printer data into a high-resolution bi-level mask layer for text and line art and a medium-resolution contone color image layer for images or background colors. Optionally, colored text can be supported by the addition of a medium-to-high-resolution contone texture layer for texturing text and line art with color data taken from an image or from flat colors. The preferred printing architecture, elements of which are described in more detail below, generalises these contone layers by representing them in abstract "image" and "texture" layers which can refer to either image data or flat color data. This division of data into layers based on content follows the base mode Mixed Raster Content (MRC) model specified in ITU-T.44. Like the MRC base mode, the preferred printing architecture makes compromises in some cases when data to be printed overlap. In particular, in the preferred form all overlaps are reduced to a 3-layer representation in a process (collision resolution) embodying the compromises explicitly.

As shown in Figure 3, the central data structure for the preferred printing architecture is a generalised representation of the three layers, called a page element. A page element can be used to represent units ranging from single rendered elements emerging from a rendering engine up to an entire band of a print job. Figure 3 shows a simplified UML diagram of a page element 300. Conceptually, the bi-level symbol region selects between the two color sources, as described in more detail below.

## PRINTING ARCHITECTURE

A more detailed description of the printing architecture will now be described with reference to Figures 2 and 3. It will be appreciated that the components of the architecture 208 shown in Figure 2 will typically be device dependent, in that they process the data into a form required by a software or hardware component further downstream.

In Figure 2, a renderer 209 exists outside of the more general printer system pipeline. Its purpose is to render files to be printed and deliver rendered elements to the data receiver 210 of the pipeline, using an API ("Application Programming Interface") exposed by the data receiver 210 for that purpose. The rendered elements are delivered in order according



to the painter's algorithm, which is well known to those skilled in the art of image processing. The data passed in through the API is converted by the data receiver 210 into lists of dictionaries and page elements for processing in later stages.

A collision resolver 211 accepts the simple page elements created by the data receiver and creates a fully opaque "resolved" page element for each intersection of a new element with the background and any elements already present. Fundamentally, the collision resolver guarantees that the entire page is tiled with opaque elements.

A stripper 212 divides a band of data into horizontally overlapping pieces. This need only be performed in the case where relatively wide or fast printers use multiple parallel devices in order to achieve the required output dot-rate. In such cases, each horizontally overlapping piece is fed into a corresponding device downstream. Where such data division is not required, the stripper 212 can be omitted.

Different printing configurations will require different configurations of layers for delivery to the downstream hardware. A layer reorganiser 213 converts 3-layer page elements to the appropriate 2- or 3-layer form for the specific configuration. Again, there may be cases in which this function is not required, in which case the layer organiser can be omitted.

A contone combiner 214 combines and clips the image and texture layers of all page elements in a strip into single image and texture layers, as required by downstream hardware.

A color converter 215 transforms the contone planes of all page elements from the input color space to a device-specific color space (which is usually CMYK).

A mask combiner 216 performs the same operation on the mask layer as the contone combiner performs on the contone layers. All elements are clipped to a strip boundary and drawn into a single mask buffer.

A densitometer 218 measures the density of the current page as a percentage of total possible density. This operation is necessary only in low-end printers with power supplies that may not be able to handle a fully dense page at full speed.

A contone compressor 220 compresses the contone layers of all page elements in order to reduce downstream memory and/or transmission bandwidth requirements.

A mask formatter 222 converts the mask layer of page elements, which may be represented as regions of placed symbol references, into the form expected by a downstream mask decompressor.

A size limiter 224 ensures that all size limitations, for bands and for entire pages, are adhered to, by either dividing bands into smaller bands or by recompressing the data, repeating until the constraint is satisfied.

If data is to be transmitted to the printer between pipeline stages, a serialised form of the data structures is generated (in serialiser 226), transmitted, then deserialised (in deserialiser 228).

Within the printer, a distributor 230 converts data from a proprietary representation into a hardware-specific representation and ensures that the data for each strip is sent to the correct hardware device whilst observing any constraints or requirements on data transmission to these devices. The distributor distributes the converted data to an appropriate one of a plurality of pipelines 232. The pipelines are identical to each other, and in essence provide decompression, scaling and dot compositing functions to generate a set of printable dot outputs.

Each pipeline 232 includes a buffer 234 for receiving the data. A contone decompressor 236 decompresses the color contone planes, and a mask decompressor decompresses the monotone (text) layer. Contone and mask scalers 240 and 242 scale the decompressed contone and mask planes respectively, to take into account the size of the medium onto which the page is to be printed.

The scaled contone planes are then dithered by ditherer 244. In the preferred form, a stochastic dispersed-dot dither is used. Unlike a clustered-dot (or amplitude-modulated) dither, a dispersed-dot (or frequency-modulated) dither reproduces high spatial frequencies

(i.e. image detail) almost to the limits of the dot resolution, while simultaneously reproducing lower spatial frequencies to their full color depth, when spatially integrated by the eye. A stochastic dither matrix is carefully designed to be relatively free of objectionable low-frequency patterns when tiled across the image. As such, its size typically exceeds the minimum size required to support a particular number of intensity levels (e.g.  $16 \times 16 \times 8$  bits for 257 intensity levels).

The dithered planes are then composited in a dot compositor 246 on a dot-by-dot basis to provide dot data suitable for printing. This data is forwarded to data distribution and drive circuitry 248, which in turn distributes the data to the correct nozzle actuators 250, which in turn cause ink to be ejected from the correct nozzles 252 at the correct time. This process is described in more detail below.

The architecture 208 includes a mainly software-based computer system portion prior to the serialiser 226, and a mainly hardware-based printer portion that is located within a printer remote from the computer system, which includes everything from the deserialiser 228 onwards. It will be appreciated, however, that the indicated division between computer system and printer is somewhat arbitrary, and various components can be placed on different sides of the divide without substantially altering the operation of the architecture as a whole. It will also be appreciated that some of the components in the architecture 208 can be handled in hardware or software remotely from the main computer system and printer. For example, rather than relying on the general-purpose processor of a personal computer, some of the components in the architecture can be accelerated using dedicated hardware.

#### SoPEC DEVICE

In the preferred form, the hardware pipelines 232 are embodied in a Small Office Home Office Printer Engine Chip (SoPEC), as shown in Figure 64 and described in more detail below. The printer preferably also includes one or more system on a chip (SoC) components, as well as the print engine pipeline control application specific logic, configured to perform some or all of the functions described above in relation to the printing pipeline.

As shown in Figure 51, from the highest point of view a SoPEC device consists of 3 distinct subsystems: a Central Processing Unit (CPU) subsystem 301, a Dynamic Random Access Memory (DRAM) subsystem 302 and a Print Engine Pipeline (PEP) subsystem 303.

The CPU subsystem 301 includes a CPU 30 that controls and configures all aspects of the other subsystems. It provides general support for interfacing and synchronizing the external printer with the internal print engine. It also controls the low-speed communication to QA chips (which are described elsewhere in this specification). The CPU subsystem 301 also contains various peripherals to aid the CPU, such as General Purpose Input Output (GPIO, which includes motor control), an Interrupt Controller Unit (ICU), LSS Master and general timers. The Serial Communications Block (SCB) on the CPU subsystem provides a full speed USB1.1 interface to the host as well as an Inter SoPEC Interface (ISI) to other SoPEC devices (not shown).

The DRAM subsystem 302 accepts requests from the CPU, Serial Communications Block (SCB) and blocks within the PEP subsystem. The DRAM subsystem 302, and in particular the DRAM Interface Unit (DIU), arbitrates the various requests and determines which request should win access to the DRAM. The DIU arbitrates based on configured parameters, to allow sufficient access to DRAM for all requestors. The DIU also hides the implementation specifics of the DRAM such as page size, number of banks and refresh rates.

The Print Engine Pipeline (PEP) subsystem 303 accepts compressed pages from DRAM and renders them to bi-level dots for a given print line destined for a printhead interface that communicates directly with up to 2 segments of a bi-lithic printhead. The first stage of the page expansion pipeline is the Contone Decoder Unit (CDU), Lossless Bi-level Decoder (LBD) and Tag Encoder (TE). The CDU expands the JPEG-compressed contone (typically CMYK) layers, the LBD expands the compressed bi-level layer (typically K), and the TE encodes Netpage tags for later rendering (typically in IR or K ink). The output from the first stage is a set of buffers: the Contone FIFO unit (CFU), the Spot FIFO Unit (SFU), and the Tag FIFO Unit (TFU). The CFU and SFU buffers are implemented in DRAM.

The second stage is the Halftone Compositor Unit (HCU), which dithers the contone layer and composites position tags and the bi-level spot layer over the resulting bi-level dithered layer.

A number of compositing options can be implemented, depending upon the printhead with which the SoPEC device is used. Up to 6 channels of bi-level data are produced from this stage, although not all channels may be present on the printhead. For example, the printhead may be CMY only, with K pushed into the CMY channels and IR ignored. Alternatively, the encoded tags may be printed in K if IR ink is not available (or for testing purposes).

In the third stage, a Dead Nozzle Compensator (DNC) compensates for dead nozzles in the printhead by color redundancy and error diffusing of dead nozzle data into surrounding dots.

The resultant bi-level 6 channel dot-data (typically CMYK, Infrared, Fixative) is buffered and written to a set of line buffers stored in DRAM via a Dotline Writer Unit (DWU).

Finally, the dot-data is loaded back from DRAM, and passed to the printhead interface via a dot FIFO. The dot FIFO accepts data from a Line Loader Unit (LLU) at the system clock rate ( $pclk$ ), while the PrintHead Interface (PHI) removes data from the FIFO and sends it to the printhead at a rate of  $2/3$  times the system clock rate.

In the preferred form, the DRAM is 2.5Mbytes in size, of which about 2Mbytes are available for compressed page store data. A compressed page is received in two or more bands, with a number of bands stored in memory. As a band of the page is consumed by the PEP subsystem 303 for printing, a new band can be downloaded. The new band may be for the current page or the next page.

Using banding it is possible to begin printing a page before the complete compressed page is downloaded, but care must be taken to ensure that data is always available for printing or a buffer under-run may occur.

The embedded USB 1.1 device accepts compressed page data and control commands from the host PC, and facilitates the data transfer to either the DRAM (or to another SoPEC device in multi-SoPEC systems, as described below).

Multiple SoPEC devices can be used in alternative embodiments, and can perform different functions depending upon the particular implementation. For example, in some cases a SoPEC device can be used simply for its onboard DRAM, while another SoPEC device attends to the various decompression and formatting functions described above. This can reduce the chance of buffer under-run, which can happen in the event that the printer commences printing a page prior to all the data for that page being received and the rest of the data is not received in time. Adding an extra SoPEC device for its memory buffering capabilities doubles the amount of data that can be buffered, even if none of the other capabilities of the additional chip are utilized.

Each SoPEC system can have several quality assurance (QA) devices designed to cooperate with each other to ensure the quality of the printer mechanics, the quality of the ink supply so the printhead nozzles will not be damaged during prints, and the quality of the software to ensure printheads and mechanics are not damaged.

Normally, each printing SoPEC will have an associated printer QA, which stores information printer attributes such as maximum print speed. An ink cartridge for use with the system will also contain an ink QA chip, which stores cartridge information such as the amount of ink remaining. The printhead also has a QA chip, configured to act as a ROM (effectively as an EEPROM) that stores printhead-specific information such as dead nozzle mapping and printhead characteristics. The CPU in the SoPEC device can optionally load and run program code from a QA Chip that effectively acts as a serial EEPROM. Finally, the CPU in the SoPEC device runs a logical QA chip (ie, a software QA chip).

Usually, all QA chips in the system are physically identical, with only the contents of flash memory differentiating one from the other.

Each SoPEC device has two LSS system buses that can communicate with QA devices for system authentication and ink usage accounting. A large number of QA devices can be

used per bus and their position in the system is unrestricted with the exception that printer QA and ink QA devices should be on separate LSS busses.

In use, the logical QA communicates with the ink QA to determine remaining ink. The reply from the ink QA is authenticated with reference to the printer QA. The verification from the printer QA is itself authenticated by the logical QA, thereby indirectly adding an additional authentication level to the reply from the ink QA.

Data passed between the QA chips, other than the printhead QA, is authenticated by way of digital signatures. In the preferred embodiment, HMAC-SHA1 authentication is used for data, and RSA is used for program code, although other schemes could be used instead.

A single SoPEC device can control two bi-lithic printheads and up to six color channels. Six channels of colored ink are the expected maximum in a consumer SOHO, or office bi-lithic printing environment, and include:

- CMY (cyan, magenta, yellow), for regular color printing.
- K (black), for black text, line graphics and gray-scale printing.
- IR (infrared), for Netpage-enabled applications.
- F (fixative), to enable printing at high speed.

Because the bi-lithic printer is capable of printing so fast, a fixative may be required to enable the ink to dry before the page touches the page already printed. Otherwise ink may bleed between pages. In relatively low-speed printing environments the fixative may not be required.

In the preferred form, the SoPEC device is color space agnostic. Although it can accept contone data as CMYX or RGBX, where X is an optional 4th channel, it also can accept contone data in any print color space. Additionally, SoPEC provides a mechanism for arbitrary mapping of input channels to output channels, including combining dots for ink optimization and generation of channels based on any number of other channels. However, inputs are typically CMYK for contone input, K for the bi-level input, and the optional Netpage tag dots are typically rendered to an infrared layer. A fixative channel is typically generated for fast printing applications.

In the preferred form, the SoPEC device is also resolution agnostic. It merely provides a mapping between input resolutions and output resolutions by means of scale factors. The expected output resolution for the preferred embodiment is 1600dpi, but SoPEC actually has no knowledge of the physical resolution of the Bi-lithic printhead.

In the preferred form, the SoPEC device is page-length agnostic. Successive pages are typically split into bands and downloaded into the page store as each band of information is consumed.

Subsystem	Unit Acronym	Unit Name	Description
DRAM	DIU	DRAM interface unit	Provides interface for DRAM read and write access for the various SoPEC units, CPU and the SCB block. The DIU provides arbitration between competing units and controls DRAM access.
	DRAM	Embedded DRAM	20Mbits of embedded DRAM.

Subsystem	Unit Acronym	Unit Name	Description
CPU	CPU	Central Processing Unit	CPU for system configuration and control.
	MMU	Memory Management Unit	Limits access to certain memory address areas in CPU user mode.
	RDU	Real-time Debug Unit	Facilitates the observation of the contents of most of the CPU addressable registers in SoPEC, in addition to some pseudo-registers in real time.



	TIM	General Timer	Contains watchdog and general system timers.
	LSS	Low Speed Serial Interfaces	Low level controller for interfacing with the QA chips
	GPIO	General Purpose IOs	General IO controller, with built-in Motor control unit, LED pulse units and de-glitch circuitry
	ROM	Boot ROM	16 KBytes of System Boot ROM code
	ICU	Interrupt Controller Unit	General Purpose interrupt controller with configurable priority, and masking.
	CPR	Clock, Power and Reset block	Central Unit for controlling and generating the system clocks and resets and powerdown mechanisms
	PSS	Power Save Storage	Storage retained while system is powered down
	USB	Universal Serial Bus Device	USB device controller for interfacing with the host USB.
	ISI	Inter-SoPEC Interface	ISI controller for data and control communication with other SoPECs in a multi-SoPEC system
	SCB	Serial Communication Block	Contains both the USB and ISI blocks.

Subsystem	Unit Acronym	Unit Name	Description
Print Engine	PCU	PEP controller	Provides external CPU with the means to read and write PEP

Pipeline (PEP)			Unit registers, and read and write DRAM in single 32-bit chunks.
	CDU	Contone Decoder Unit	Expands JPEG compressed contone layer and writes decompressed contone to DRAM
	CFU	Contone FIFO Unit	Provides line buffering between CDU and HCU
	LBD	Lossless Bi-level Decoder	Expands compressed bi-level layer.
	SFU	Spot FIFO Unit	Provides line buffering between LBD and HCU
	TE	Tag Encoder	Encodes tag data into line of tag dots.
	TFU	Tag FIFO Unit	Provides tag data storage between TE and HCU
	HCU	Half-toner Compositor Unit	Dithers contone layer and composites the bi-level spot and position tag dots.
	DNC	Dead Nozzle Compensator	Compensates for dead nozzles by color redundancy and error diffusing dead nozzle data into surrounding dots.
	DWU	Dotline Writer Unit	Writes out the 6 channels of dot data for a given printline to the line store DRAM
	LLU	Line Loader Unit	Reads the expanded page image from line store, formatting the data appropriately for the bi- lithic printhead.
	PHI	PrintHead Interface	Responsible for sending dot data to the bi-lithic printheads and for providing line synchronization between multiple SoPECs. Also

	provides test interface to printhead such as temperature monitoring and Dead Nozzle Identification.
--	---

### PRINthead MECHANICAL

In the preferred form, a Memjet printer has two printhead integrated circuits that are mounted adjacent each other to form a pagewidth printhead. Typically, the printhead ICs can vary in size from 2 inches to 8 inches, so several combinations can be used to produce, say, an A4 pagewidth printhead. For example two printhead ICs of 7 and 3 inches, 2 and 4 inches, or 5 and 5 inches could be used to create an A4 printhead (the notation is 7:3). Similarly 6 and 4 (6:4) or 5 and 5 (5:5) combinations can be used. An A3 printhead can be constructed from 8 and 6-inch printhead integrated circuits, for example. For photographic printing, particularly in camera, smaller printheads can be used. It will also be appreciated that a single printhead integrated circuit, or more than two such circuits, can also be used to achieve the required printhead width.

A preferred printhead embodiment will now be described with reference to Figures 39 to 49. As best shown in Figures 39 to 41 and Figure 48, a printhead 420 takes the form of an elongate unit. As best shown in Figure 48, the components of the printhead 420 include a support member 421, a flexible PCB 422, an ink distribution molding 423, an ink distribution plate 424, a MEMS printhead comprising first and second printhead integrated circuits (ICs) 425 and 426, and busbars 427.

The support member 421 is can be formed from any suitable material, such as metal or plastic, and can be extruded, molded or form in any other way. The support member 421 should be strong enough to hold the other components in the appropriate alignment relative to each other whilst stiffening and strengthening the printhead as a whole.

The flexible PCB extends the length of the printhead 420 and includes first and second electrical connectors 428 and 429. The electrical connectors 428 and 429 correspond with

the flexible connectors 147 shown in other Figures. The electrical connectors include contact areas 148 and 159 that, in use, are positioned in contact with corresponding output connectors (not shown) from the SoPEC chip 166. Data from the SoPEC chip 166 passes along the electrical connectors 428 and 429, and is distributed to respective ends of the first and second printhead ICs 425 and 426.

As shown in Figure 49, the ink distribution molding 423 includes a plurality of elongate conduits 430 that distribute fluids (ie, colored inks, infrared ink and fixative) and pressurized air from the air pump along the length of the printhead 420. Sets of fluid apertures 431 disposed along the length of the ink distribution molding 423 distribute the fluids and air from the conduits 430 to the ink distribution plate 424. The fluids and air are supplied via nozzles 440 formed on a plug 441, which plugs into a corresponding socket (not shown) in the printer.

The distribution plate 424 is a multi-layer construction configured to take fluids provided locally from the fluid apertures 431 and distribute them through smaller distribution apertures 432 into the printhead ICs 425 and 426.

The printhead ICs 425 and 426 are positioned end to end, and are held in contact with the distribution plate 424 so that ink from the smaller distribution apertures 432 can be fed into corresponding apertures (not shown) in the printhead ICs 425 and 426.

The busbars 427 are relatively high-capacity conductors positioned to provide drive current to the actuators of the printhead nozzles (described in detail below). As best shown in Figures 45 to 47, the busbars 427 are retained in position at one end by a socket 433, and at both ends by wrap-around wings 434 of the flexible PCB 422. The busbars also help hold the printhead ICs 425 in position, as best shown in Figures 44, 46 and 47.

As shown best in Figures 46, 47 and 49, when assembled, the flexible PCB 422 is effectively wrapped around the other components, thereby holding them in contact with each other. Notwithstanding this binding effect, the support member 421 provides a major proportion of the required stiffness and strength of the printhead 420 as a whole.

## PRINthead CMOS

Turning now to Figures 4 to 9, a preferred embodiment of the printhead 420 (comprising printhead ICs 425 and 426) will be described. For clarity, only one printhead IC 425 is shown in Figure 4, but it will be appreciated that a corresponding arrangement is implemented for the printhead IC 426.

Figure 4 shows an overview of printhead IC 425 and its connections to the SoPEC device 166. Printhead IC 425 includes a nozzle core array 401 containing the repeated logic to fire each nozzle, and nozzle control logic 402 to generate the timing signals to fire the nozzles. The nozzle control logic 402 receives data from the SoPEC chip 166 via a high-speed link. In the preferred form, a single SoPEC chip 166 feeds the two printhead ICs 425 and 426 with print data.

The nozzle control logic is configured to send serial data to the nozzle array core for printing, via a link 407, which for printhead 425 is the electrical connector 428. Status and other operational information about the nozzle array core 401 is communicated back to the nozzle control logic via another link 408, which is also provided on the electrical connector 428.

The nozzle array core 401 is shown in more detail in Figures 5 and 6. In Figure 5, it will be seen that the nozzle array core comprises an array of nozzle columns 501. The array includes a fire/select shift register 502 and up to 6 color channels, each of which is represented by a corresponding dot shift register 503.

As shown in Figure 6, the fire/select shift register 502 includes forward path fire shift register 600, a reverse path fire shift register 601 and a select shift register 602. Each dot shift register 503 includes an odd dot shift register 603 and an even dot shift register 604. The odd and even dot shift registers 603 and 604 are connected at one end such that data is clocked through the odd shift register 603 in one direction, then through the even shift register 604 in the reverse direction. The output of all but the final even dot shift register is fed to one input of a multiplexer 605. This input of the multiplexer is selected by a signal (corescan) during post-production testing. In normal operation, the corescan signal selects

dot data input Dot[x] supplied to the other input of the multiplexer 605. This causes Dot[x] for each color to be supplied to the respective dot shift registers 503.

A single column N will now be described with reference to Figure 6. In the embodiment shown, the column N includes 12 data values, comprising an odd data value 606 and an even data value 607 for each of the six dot shift registers. Column N also includes an odd fire value 608 from the forward fire shift register 600 and an even fire value 609 from the reverse fire shift register 601, which are supplied as inputs to a multiplexer 610. The output of the multiplexer 610 is controlled by the select value 611 in the select shift register 602. When the select value is zero, the odd fire value is output, and when the select value is one, the even fire value is output.

Each of the odd and even data values 606 and 607 is provided as an input to corresponding odd and even dot latches 612 and 613 respectively.

Each dot latch and its associated data value form a unit cell, such as unit cell 614. A unit cell is shown in more detail in Figure 7. The dot latch 612 is a D-type flip-flop that accepts the output of the data value 606, which is held by a D-type flip-flop 614 forming an element of the odd dot shift register 603. The data input to the flip-flop 614 is provided from the output of a previous element in the odd dot shift register (unless the element under consideration is the first element in the shift register, in which case its input is the Dot[x] value). Data is clocked from the output of flip-flop 614 into latch 612 upon receipt of a negative pulse provided on *LsyncL*.

The output of latch 612 is provided as one of the inputs to a three-input AND gate 65. Other inputs to the AND gate 615 are the Fr signal (from the output of multiplexer 610) and a pulse profile signal Pr. The firing time of a nozzle is controlled by the pulse profile signal Pr, and can be, for example, lengthened to take into account a low voltage condition that arises due to low battery (in a battery-powered embodiment). This is to ensure that a relatively consistent amount of ink is efficiently ejected from each nozzle as it is fired. In the embodiment described, the profile signal Pr is the same for each dot shift register, which provides a balance between complexity, cost and performance. However, in other

embodiments, the Pr signal can be applied globally (ie, is the same for all nozzles), or can be individually tailored to each unit cell or even to each nozzle.

Once the data is loaded into the latch 612, the fire enable Fr and pulse profile Pr signals are applied to the AND gate 615, combining to trigger the nozzle to eject a dot of ink for each latch 612 that contains a logic 1.

The signals for each nozzle channel are summarized in the following table:

Name	Direction	Description
d	Input	Input dot pattern to shift register bit
q	Output	Output dot pattern from shift register bit
SrClk	Input	Shift register clock in – d is captured on rising edge of this clock
LsyncL	Input	Fire enable - needs to be asserted for nozzle to fire
Pr	Input	Profile – needs to be asserted for nozzle to fire

As shown in Figure 7, the fire signals Fr are routed on a diagonal, to enable firing of one color in the current column, the next color in the following column, and so on. This averages the current demand by spreading it over 6 columns in time-delayed fashion.

The dot latches and the latches forming the various shift registers are fully static in this embodiment, and are CMOS-based. The design and construction of latches is well known to those skilled in the art of integrated circuit engineering and design, and so will not be described in detail in this document.

The combined printhead ICs define a printhead having 13824 nozzles per color. Therefore, in the case where the printhead ICs 425 and 426 are equal in length, each of them includes 6912 nozzles per color. The circuitry supporting each nozzle is the same, but the pairing of nozzles happens due to physical positioning of the MEMS nozzles; odd and even nozzles are not actually on the same horizontal line

Power and ground are provided via pads disposed along the length of the printhead ICs. The pads are connected to busbars 427 using conductive adhesive, as described above.

#### PRINTHEAD NOZZLES AND ACTUATORS

The preferred printhead nozzle arrangement, comprising a nozzle and corresponding actuator, will now be described with reference to Figures 52 to 61. Figure 63 shows an array of the nozzle arrangements 801 formed on a silicon substrate 8015. The nozzle arrangements are identical, but in the preferred embodiment, different nozzle arrangements are fed with different colored inks and fixative. It will be noted that rows of the nozzle arrangements 801 are staggered with respect to each other, allowing closer spacing of ink dots during printing than would be possible with a single row of nozzles. The multiple rows also allow for redundancy (if desired), thereby allowing for a predetermined failure rate per nozzle.

Each nozzle arrangement 801 is the product of an integrated circuit fabrication technique. In particular, the nozzle arrangement 801 defines a micro-electromechanical system (MEMS).

For clarity and ease of description, the construction and operation of a single nozzle arrangement 801 will be described with reference to Figures 52 to 60.

The ink jet printhead chip 12 includes a silicon wafer substrate 801. 0.35 Micron 1 P4M 12 volt CMOS microprocessing circuitry is positioned on the silicon wafer substrate 8015.

A silicon dioxide (or alternatively glass) layer 8017 is positioned on the wafer substrate 8015. The silicon dioxide layer 8017 defines CMOS dielectric layers. CMOS top-level metal defines a pair of aligned aluminium electrode contact layers 8030 positioned on the silicon dioxide layer 8017. Both the silicon wafer substrate 8015 and the silicon dioxide layer 8017 are etched to define an ink inlet channel 8014 having a generally circular cross section (in plan). An aluminium diffusion barrier 8028 of CMOS metal 1, CMOS metal 2/3 and CMOS top level metal is positioned in the silicon dioxide layer 8017 about the ink inlet channel 8014. The diffusion barrier 8028 serves to inhibit the diffusion of hydroxyl ions through CMOS oxide layers of the drive circuitry layer 8017.



A passivation layer in the form of a layer of silicon nitride 8031 is positioned over the aluminium contact layers 8030 and the silicon dioxide layer 8017. Each portion of the passivation layer 8031 positioned over the contact layers 8030 has an opening 8032 defined therein to provide access to the contacts 8030.

The nozzle arrangement 801 includes a nozzle chamber 8029 defined by an annular nozzle wall 8033, which terminates at an upper end in a nozzle roof 8034 and a radially inner nozzle rim 804 that is circular in plan. The ink inlet channel 8014 is in fluid communication with the nozzle chamber 8029. At a lower end of the nozzle wall, there is disposed a moving rim 8010, that includes a moving seal lip 8040. An encircling wall 8038 surrounds the movable nozzle, and includes a stationary seal lip 8039 that, when the nozzle is at rest as shown in Figure 52, is adjacent the moving rim 8010. A fluidic seal 8011 is formed due to the surface tension of ink trapped between the stationary seal lip 8039 and the moving seal lip 8040. This prevents leakage of ink from the chamber whilst providing a low resistance coupling between the encircling wall 8038 and the nozzle wall 8033.

As best shown in Figure 59, a plurality of radially extending recesses 8035 is defined in the roof 8034 about the nozzle rim 804. The recesses 8035 serve to contain radial ink flow as a result of ink escaping past the nozzle rim 804.

The nozzle wall 8033 forms part of a lever arrangement that is mounted to a carrier 8036 having a generally U-shaped profile with a base 8037 attached to the layer 8031 of silicon nitride.

The lever arrangement also includes a lever arm 8018 that extends from the nozzle walls and incorporates a lateral stiffening beam 8022. The lever arm 8018 is attached to a pair of passive beams 806, formed from titanium nitride (TiN) and positioned on either side of the nozzle arrangement, as best shown in Figures 55 and 60. The other ends of the passive beams 806 are attached to the carrier 8036.

The lever arm 8018 is also attached to an actuator beam 807, which is formed from TiN. It will be noted that this attachment to the actuator beam is made at a point a small but critical distance higher than the attachments to the passive beam 806.

As best shown in Figures 55 and 58, the actuator beam 807 is substantially U-shaped in plan, defining a current path between the electrode 809 and an opposite electrode 8041. Each of the electrodes 809 and 8041 are electrically connected to respective points in the contact layer 8030. As well as being electrically coupled via the contacts 809, the actuator beam is also mechanically anchored to anchor 808. The anchor 808 is configured to constrain motion of the actuator beam 807 to the left of Figures 52 to 54 when the nozzle arrangement is in operation.

The TiN in the actuator beam 807 is conductive, but has a high enough electrical resistance that it undergoes self-heating when a current is passed between the electrodes 809 and 8041. No current flows through the passive beams 806, so they do not expand.

In use, the device at rest is filled with ink 8013 that defines a meniscus 803 under the influence of surface tension. The ink is retained in the chamber 8029 by the meniscus, and will not generally leak out in the absence of some other physical influence.

As shown in Figure 53, to fire ink from the nozzle, a current is passed between the contacts 809 and 8041, passing through the actuator beam 807. The self-heating of the beam 807 due to its resistance causes the beam to expand. The dimensions and design of the actuator beam 807 mean that the majority of the expansion is in a horizontal direction with respect to Figures 52 to 54. The expansion is constrained to the left by the anchor 808, so the end of the actuator beam 807 adjacent the lever arm 8018 is impelled to the right.

The relative horizontal inflexibility of the passive beams 806 prevents them from allowing much horizontal movement the lever arm 8018. However, the relative displacement of the attachment points of the passive beams and actuator beam respectively to the lever arm causes a twisting movement that causes the lever arm 8018 to move generally downwards. The movement is effectively a pivoting or hinging motion. However, the absence of a true

pivot point means that the rotation is about a pivot region defined by bending of the passive beams 806.

The downward movement (and slight rotation) of the lever arm 8018 is amplified by the distance of the nozzle wall 8033 from the passive beams 806. The downward movement of the nozzle walls and roof causes a pressure increase within the chamber 29, causing the meniscus to bulge as shown in Figure 53. It will be noted that the surface tension of the ink means the fluid seal 11 is stretched by this motion without allowing ink to leak out.

As shown in Figure 54, at the appropriate time, the drive current is stopped and the actuator beam 807 quickly cools and contracts. The contraction causes the lever arm to commence its return to the quiescent position, which in turn causes a reduction in pressure in the chamber 8029. The interplay of the momentum of the bulging ink and its inherent surface tension, and the negative pressure caused by the upward movement of the nozzle chamber 8029 causes thinning, and ultimately snapping, of the bulging meniscus to define an ink drop 802 that continues upwards until it contacts adjacent print media.

Immediately after the drop 802 detaches, the meniscus forms the concave shape shown in Figure 52. Surface tension causes the pressure in the chamber 8029 to remain relatively low until ink has been sucked upwards through the inlet 8014, which returns the nozzle arrangement and the ink to the quiescent situation shown in Figure 52.

As best shown in Figure 55, the nozzle arrangement also incorporates a test mechanism that can be used both post-manufacture and periodically after the printhead is installed. The test mechanism includes a pair of contacts 8020 that are connected to test circuitry (not shown). A bridging contact 8019 is provided on a finger 8043 that extends from the lever arm 8018. Because the bridging contact 8019 is on the opposite side of the passive beams 806, actuation of the nozzle causes the bridging contact to move upwardly, into contact with the contacts 8020. Test circuitry can be used to confirm that actuation causes this closing of the circuit formed by the contacts 8019 and 8020. If the circuit closed appropriately, it can generally be assumed that the nozzle is operative.

#### FLAT PANEL DISPLAY DEVICE WITH INTEGRATED PRINTER

A preferred embodiment of the invention is shown in Figures 14 to 31. Referring particularly to Figures 14 to 21, a flat panel display unit 141 includes a flat panel display 142 that is supported on a stand 143. The stand 143 includes a base portion 144, which supports an arm 145 to which a housing 146 for the display 142 is hingedly connected. Various control buttons 148 are provided on the display unit 141, for controlling display functions such as contrast, brightness, color temperature and the like.

The display unit 141 incorporates a page-width printer (described below) that accepts, in the preferred embodiments shown in Figures 13 to 38, single sheets of standard A4 or US Letter paper 149. A curved paper guide 150 causes paper exiting the printer to be directed away from the base 144 of the display unit 141, as best shown in Figures 15 and 18.

The sub-components that comprise the display unit 141 are shown in exploded view in Figure 22. A mounting plate 151 is hingedly mounted to the arm 145 and attached to a rear cover molding 152 formed from a plastics material. The cover molding is perforated to allow convective air currents to cool the electronic circuitry inside the display unit 141.

A metallic radio frequency interference and electromagnetic interference (RFI/EMI) shield 153 fits inside the concave side of the rear cover molding 152. The shield 153 screens the various circuitry elements from external radiation, whilst reducing any radiation generated by the circuitry being transmitted from the display unit 141. The shield 153 takes the form of a cage with cooling holes that allow ventilation of the circuitry. An additional shield 154 covers the printhead (described below in relation to Figure 29).

The various electronic, mechanical and electromechanical components that comprise the printer are mounted on interconnected printed circuit boards (PCBs) 155, as best shown in Figures 25 to 27. The PCBs 155 include a printhead PCB 156, an analog converter PCB 157, a backlight inverter PCB 158, and a power supply unit (PSU) 159. The PSU 159 supplies power at appropriate voltage and current to the various other PCBs via wiring 160.

Turning to Figure 28, the printhead PCB forms part of a print engine assembly 161. The print engine assembly 161 also includes paper feed rollers 162, a platen 163 for supporting paper as it is fed past the printhead, an air pump 164 for supplying pressurized air to the

printhead, a flexible connector 147 for supplying data from the print engine chips on the print engine PCB to the printhead, an ink delivery bus 165, and a print engine controller (SoPEC) chip 166. The feed rollers 162 are driven by a paper drive motor 197 and drive assembly 198.

As shown in Figure 29 (in which the platen and feed rollers are removed for clarity), the print engine assembly 161 also includes support metalwork 167 for mounting the various components, copper busbars 168 for supplying power from the power leads 169 to the printheads, and flexible paper guide fingers 170. Ink channel moldings 171 route ink from the ink delivery bus 165, which also includes electrical contacts 173 that enable communication between an ink cartridge (described below) and the print engine assembly. It will be noted that the present embodiment includes two printhead segments 174 and 175 of equal length that together form a pagewidth printhead. As described earlier in this document,

Referring back to Figure 22, a metal paper chute 176 is provided to guide paper behind the display and down to the printhead. A metal chassis 177 is provided to support the display 142, which is surrounded and protected by a plastic front bezel molding 178. A menu PCB 179 holds the menu buttons 148 and associated status LEDs.

As best shown in Figure 16, the display unit 141 is provided with power via a mains cord 180 and associated mains plug 181. The mains plug 181 is inserted into mains socket 182, which is shown in Figure 23 with the mains plug 181 removed. The mains socket 182 is hard-wired into the PSU 159.

A video input cable 183 and associated video plug 184 supply video data from a computer. The video plug 184 is inserted into a video socket 185, which is shown in Figure 23 with the video plug 184 removed for clarity.

A data connection in the form of a USB 2 link is provided by way of a data cable 186 and associated data plug 187. The plug 187 is inserted into a USB 2 compliant data socket 188, which is shown in Figure 23 with the data plug 187 removed for clarity.

An ink cartridge 189 containing the various inks required for operation of the printer releasably engages the ink delivery bus 165 via an aperture 190 formed in the rear molding 152. The cartridge is preferably held in position by an interference fit, although a positive retaining mechanism such as a clip can be supplied in alternative embodiments. As best shown in Figure 27, the ink delivery bus 165 includes a plurality of fluid ports 191 that engage with corresponding fluid outputs (not shown) formed in the cartridge. In the embodiment shown, each fluid port 191 includes a hollow needle 192 that penetrates a seal (not shown) in the corresponding fluid output. The seal can be an annular resilient seal with a frangible membrane, or simply a frangible membrane that self-seals around the needle 192 as the cartridge 189 is inserted into an operative position.

The cartridge 189 contains the inks necessary for its use with the printer. The various possible combinations of colored inks (such as CMY), black ink, infrared ink and a fixative are described elsewhere in this document. The cartridge 189 also includes a QA ("Question-Answer") chip that is configured to store information accessible by the SoPEC chip 166, such as ink levels remaining (preferably on a per-ink basis), types of ink contained in the cartridge, security data for ensuring the cartridge is compliant with the printer's needs and any other data that might be useful for the operation of the printer based on the particular cartridge inserted. The QA chip is electrically connected to a set of contacts (not shown) that operatively engage the electrical contacts 173 on an edge of the ink delivery bus 165. The electrical contacts allow information to be read from the QA chip in the cartridge 189 as required. This can be when the cartridge is first inserted, and possibly periodically thereafter. In the preferred embodiment, the SoPEC chip 166 can also write back to the cartridge. Typically, this will involve determining the amount of ink used and then updating the QA chip in the cartridge.

A number of other elements of the display unit 141 not shown in other Figures are shown in Figure 48. It will be noted that the flat panel display 142 is preferably a Thin Film Transistor (TFT) Liquid Crystal Display (LCD). However, it will be understood that the particular technology employed in the flat panel display 142 is not critical to the invention. The flat panel display 142 can therefore be of any other type, including those using Organic Light Emitting Diode (OLED), Field Emission Display (FED) and Plasma Display Panel (PDP) technologies.

The display unit includes row drivers 193 and column drivers 194 that are provided with input signals by an image processor 195 located on the analog converter PCB 157. The image processor receives display data from a personal computer (not shown) via the video socket 185. The fluorescent backlight inverter PCB 158 drives a fluorescent backlight 196.

The USB input 188 provides data in accordance with the USB 2 protocol to the SoPEC chip 166. The image processor 195 can also provide data to the SoPEC chip 166, as described in detail below.

Operation of the display unit will now be described with reference to Figure 48. Display data is received from a personal computer, or other suitable video data source, via the video input socket 185. The display data is provided to the image processor 195, which processes and converts it into a format suitable for supply to the row drivers 193 and column drivers 194. These drive the various TFTs required to display the image on the flat panel display 142. The fluorescent backlight 196 provides illumination from behind the TFTs, thereby enhancing visibility of images displayed. Various display settings, such as contrast, brightness and resolution, can be altered by a user via the controls 148.

The USB input socket 188 accepts USB formatted data from a connected personal computer, such as personal computer 102 in Figure 1. It will be appreciated that this data can come from any other suitable source, such as a network connection or any other data communication link.

Upon receipt, the data is forwarded via an internal USB link to the printhead PCB 156 and the SoPEC chip 166. The data is decompressed and formatted in accordance with the steps shown in Figure 1, using the hardware 232 described in relation to Figure 2. The formatted data is forwarded from the SoPEC chip 166 to the Memjet printheads 174 and 175. The data is then printed onto the paper 149 as it is driven past the printheads.

In the preferred embodiment, the print button 200 can be used to generate a printout of the presently displayed image. This enables a printout of the screen to be taken without the

need to use a mouse, keyboard or other control device associated with the personal computer 102.

The invention has a number of advantages over the prior art. The combination of a printer and flat panel display saves a considerable amount of room compared to a separate display and printer combination. The printed matter, in the preferred embodiment, is ejected right in front of the user, unlike the case with prior art printers which are, for the most part, too bulky to be placed directly in front of the user.

In the particularly preferred embodiment described, the pagewidth nature of the printer and its relatively compact dimensions compared with inkjet and laser printers respectively mean that high quality printing can be provided without substantially increasing the size of the flat panel display casing. Given that a major advantage of flat panel displays is their compactness, this can be considered a major feature of the preferred embodiment. With the use of a pagewidth printhead, there is less vibration than with a reciprocating inkjet printhead, resulting in a more stable image for a user viewing the display whilst printing.

An alternative embodiment of the invention is shown in Figure 32, in which like numerals indicate features corresponding to those described in relation to the embodiment of Figures 14 to 31. The embodiment of Figure 32 is a duplex printer, which includes a pair of printheads 304 and 305. The printheads are preferably of the same construction as the single printhead, each comprising two printhead segments. In the preferred embodiment, each of the printheads 304 and 305 has its own associated SoPEC device. Figure 33 shows the preferred combination of QA chips 306 and 307, and SoPEC devices 308 and 309, and their relationships with each other and the duplex printheads 304 and 305. In this embodiment, the first SoPEC device 308 is in communication with the host via a USB connection 310, and acts as an ISI Master. The second SoPEC device 309 is an ISI Slave. As ISI master, the first SoPEC device 308 receives all the compressed page data for both the SoPEC devices, and redistributes the requisite data to the second SoPEC device via the ISI bus. The ISI Master also communicates with the ink cartridge QA chip 311 to read and update ink levels and other data stored by the QA chip 311.



In operation, the embodiment of Figure 32 prints onto both sides of the paper 149 as it is fed between the printheads 304 and 305.

A further embodiment is shown in Figures 33 and 34, in which like numerals indicate features corresponding to those described in relation to the embodiment of Figures 14 to 31. The embodiment includes a multi-sheet feeder 312 that enables a single sheet at a time to be taken from a stack of paper and fed past the printhead. The feeder 312 is best shown in Figure 34, and includes a paper stop 205 that holds a stack of paper 203 in position. The preferred capacity of the stack 203 is about 50 sheets, although other capacities can be used. A flexible shim 206 extends across the top of the paper stop 205, terminating in an edge adjacent and below a pickup roller 204. The pickup roller 204 is generally circular in cross-section, but incorporates a flat portion 313.

In use, the paper stack 203 is loaded such that it rest on the flexible shim 206, which is in turn supported by the paper stop 205. The pickup roller 204 is positioned rotationally such that the flat portion 313 is aligned with the nearest piece of paper in the stack. The pickup roller 204 is then rotated clockwise (relative to Figure 34), until the rounded portion engages the piece of paper. As this happens, friction between the paper and the roller increases, causing a downward force on the paper. The flexible shim 206 causes the sheet of paper to be separated from the stack 203 and driven downwards towards the feed rollers 162. As the paper engages the feed rollers, the flat spot rotates back into the position shown in Figure 34, which reduces the friction between the pickup roller and the paper, thereby enabling the feed rollers to push the paper past the printhead.

It will be appreciated that any other known paper feeding mechanisms can be employed for taking a single sheet from a stack and feeding it for printing. It will also be appreciated that a duplex printhead arrangement such as that shown in Figure 32 can also be employed with a multi-sheet feed mechanism.

Another embodiment is shown in Figure 35, in which the sockets 182, 185 and 188 are positioned in the base portion 144 of the display unit. This enables a neater arrangement of cables, since there is no need to route them all the way up to the rear molding 152. Rather,

internal wiring takes the power and data from the sockets to the relevant components via the interior of the arms 145.

Figure 36 shows another embodiment, in which the base portion 144 acts as a data hub. Circuitry (not shown) in the base portion 144 allows the USB connection enabled by socket 188 to send and receive data to and from other devices via data hub connectors 207. This enables anything from network to peripheral devices to be connected via the base portion 144, rather than needing to access ports or sockets on the personal computer to which the display unit is connected. This can be advantageous given that ports and sockets on personal computers are often positioned in relatively difficult to access places. Often, the computer device itself is positioned out of the way, such as underneath a desk, which can contribute to this inconvenience of making data connections in the prior art.

Yet another embodiment, shown in Figure 37, the ink bus 165 is positioned such that the ink cartridge 189 is positioned on the mounting plate 151.

Figure 38 shows another embodiment of the invention, in which the ink cartridge 189 is positioned in the base portion 144 of the display unit. In this case, the arms 145 also include ink conduits for supplying ink from the cartridge 189 to the printer. In some cases, it may be necessary to provide some form of pump or other pressurization arrangement to push the ink upwards through the conduits in the arms 145.

Various exemplary, non-limiting aspects of the invention are foreshadowed in the following numbered paragraphs:

FPDP01

1. A printing and display device comprising:  
a flat panel display for displaying images from a computer; and  
a printer, the printer including a printhead for printing onto the paper.
2. A printing and display device according to paragraph 1, wherein the printer includes at least two the printheads, the printheads being disposed on either side of a path through which print media is fed for printing, thereby enabling substantially simultaneous printing of both sides of the print media.
3. A printing and display device according to paragraph 1, configured to receive print data to be printed, and display data to be displayed, from a computer system.
4. A printing and display device according to paragraph 3, wherein the printing and display device includes a connection configured to allow releasable operative connection of the computer system to the printing and display device, for receiving the print data and the display data from the computer system.
5. A printing a display device according to paragraph 4, wherein the connection includes at least one socket for accepting at least one corresponding data cable.
6. A printing and display device according to paragraph 4, wherein the connection includes a wireless receiver for receiving the print data and/or the display data.
7. A printing and display device according to paragraph 4, wherein the connection is a Universal Synchronous Bus (USB) connection.
8. A printing and display device according to paragraph 1, further including a paper feed mechanism for feeding paper to the printhead for printing, the printhead being arranged to print onto the paper.

9. A printing and display device according to paragraph 8, wherein the paper feed mechanism is configured to position the paper substantially parallel in at least one direction with respect to a plane defined by the flat panel display.
10. A printing and display device according to paragraph 8 or 9, wherein the paper feed mechanism is configured to accept a single sheet of paper at a time for printing.
11. A printing and display device according to paragraph 8 or 9, wherein the paper feed mechanism includes a paper separator for feeding a single sheet of paper to the printhead from a stack of sheets of paper.
12. A printing and display device according to paragraph 1, wherein the printer is a process color printer.
13. A printing and display device according to paragraph 1, wherein the printer is an inkjet printer.
14. A printing and display device according to paragraph 13, wherein the printer has more than 5,000 inkjet nozzles.
15. A printing and display device according to paragraph 1 or 14, wherein the printer is a page-width printer.
16. A printing and display device according to paragraph 1, wherein the flat panel display measures at least 14 inches on the diagonal.
17. A printing and display device according to paragraph 1, including at least two of the printheads, the printheads being disposed on either side of a path through which the paper is fed for printing, thereby enabling substantially simultaneous printing of both sides of a sheet of paper.

18. A printing and display device according to paragraph 1, configured to enable printing of standard A4 or Letter sized sheets of paper.
19. A printing and display device according to paragraph 1, configured such that paper to be printed is fed manually into a paper path that directs the paper from a region adjacent the upper edge of the flat panel display, past the printhead for printing, then out of the device adjacent a lower edge of the flat panel display.
20. A printing and display device according to paragraph 1, further including a curved paper guide disposed, when the device is in use, beneath the flat panel display, such that the paper that has been printed is urged horizontally as it exits the device.
21. A printing and display device according to paragraph 1, wherein the flat panel display is of one of the following types:
  - Liquid Crystal Display (LCD);
  - Organic Light Emitting Diode (OLED)
  - Field Emission Display (FED)
  - Plasma Display Panel (PDP)
22. A printing and display device according to paragraph 1, wherein the printhead is configured to receive halftoned print data to be printed onto the print media.
23. A printing and display device according to paragraph 1, further including a halftoning unit for generating halftoned image data and supplying it to the printhead for printing.
24. A printing and display device according to paragraph 1, wherein the printhead is configured to print photographic images.
25. A printing and display device according to paragraph 1, wherein the printhead is configured to print image and text data.

26. A printing and display device according to paragraph 3, wherein the computer system is a personal computer.

## FPDP02:

1. A printing and display device comprising:  
a flat panel display for displaying images from a computer;  
a stand for holding the flat panel display in an operative position; and  
a printer, the printer including a printhead for printing onto paper;  
wherein the stand includes at least one receptacle configured to accept at least one replaceable ink cartridge for supplying ink to the printer.
2. A printing and display device according to paragraph 1, wherein the at least one receptacle is formed in a base portion of the stand.
3. A printing and display device according to paragraph 1, further including at least one ink duct configured to supply ink from the cartridge to the printhead when the cartridge is engaged with the receptacle.
4. A printing and display device according to paragraph 1, wherein the printer includes at least two the printheads, the printheads being disposed on either side of a path through which print media is fed for printing, thereby enabling substantially simultaneous printing of both sides of the print media.
5. A printing and display device according to paragraph 1, configured to receive print data to be printed, and display data to be displayed, from a computer system.
6. A printing and display device according to paragraph 5, wherein the printing and display device includes a connection configured to allow releasable operative connection of the computer system to the printing and display device, for receiving the print data and the display data from the computer system.
7. A printing a display device according to paragraph 6, wherein the connection includes at least one socket for accepting at least one corresponding data cable.
8. A printing and display device according to paragraph 6, wherein the connection includes a wireless receiver for receiving the print data and/or the display data.

9. A printing and display device according to paragraph 6, wherein the connection is a Universal Synchronous Bus (USB) connection.
10. A printing and display device according to paragraph 1, further including a paper feed mechanism for feeding paper to the printhead for printing, the printhead being arranged to print onto the paper.
11. A printing and display device according to paragraph 1, wherein the paper feed mechanism is configured to position the paper substantially parallel in at least one direction with respect to a plane defined by the flat panel display.
12. A printing and display device according to paragraph 10 or 11, wherein the paper feed mechanism is configured to accept a single sheet of paper at a time for printing.
13. A printing and display device according to paragraph 10 or 11, wherein the paper feed mechanism includes a paper separator for feeding a single sheet of paper to the printhead from a stack of sheets of paper.
14. A printing and display device according to paragraph 1, wherein the printer is a process color printer.
15. A printing and display device according to paragraph 1, wherein the printer is an inkjet printer.
16. A printing and display device according to paragraph 15, wherein the printer has more than 5,000 inkjet nozzles.
17. A printing and display device according to paragraph 1 or 16, wherein the printer is a page-width printer.
18. A printing and display device according to paragraph 1, wherein the flat panel display measures at least 14 inches on the diagonal.



19. A printing and display device according to paragraph 1, including at least two of the printheads, the printheads being disposed on either side of a path through which the paper is fed for printing, thereby enabling substantially simultaneous printing of both sides of a sheet of paper.
20. A printing and display device according to paragraph 1, configured to enable printing of standard A4 or Letter sized sheets of paper.
21. A printing and display device according to paragraph 1, configured such that paper to be printed is fed manually into a paper path that directs the paper from a region adjacent the upper edge of the flat panel display, past the printhead for printing, then out of the device adjacent a lower edge of the flat panel display.
22. A printing and display device according to paragraph 1, further including a curved paper guide disposed, when the device is in use, beneath the flat panel display, such that the paper that has been printed is urged horizontally as it exits the device.
23. A printing and display device according to paragraph 1, wherein the flat panel display is of one of the following types:
  - Liquid Crystal Display (LCD);
  - Organic Light Emitting Diode (OLED)
  - Field Emission Display (FED)
  - Plasma Display Panel (PDP)
24. A printing and display device according to paragraph 1, wherein the printhead is configured to receive halftoned print data to be printed onto the print media.
25. A printing and display device according to paragraph 1, further including a halftoning unit for generating halftoned image data and supplying it to the printhead for printing.

26. A printing and display device according to paragraph 1, wherein the printhead is configured to print photographic images.
27. A printing and display device according to paragraph 1, wherein the printhead is configured to print image and text data.
28. A printing and display device according to paragraph 5, wherein the computer system is a personal computer.

## FPDP03:

1. A printing and display device comprising:
  - a data connection for receiving print data from a computer;
  - a flat panel display for displaying images received from a computer;
  - a printer, the printer including a printhead for printing onto paper on the basis of the print data; and
  - a data connection hub configured to allow connection of at least one data-receiving device to the printing and display device, enabling the data-receiving device to receive data from the computer.
2. A printing and display device according to paragraph 1, wherein the data connection hub operates in accordance with the same general protocol as the data connection.
3. A printing and display device according to paragraph 1, wherein the data connection hub is configured to receive data from at least some devices connectable thereto.
4. A printing and display device according to paragraph 2, wherein the protocol is a Universal Synchronous Bus protocol.
5. A printing and display device according to paragraph 3, wherein the protocol is USB 1.1 or USB 2.0.
6. A printing and display device according to any one of paragraphs 1 to 3, wherein the protocol is IEEE1394.
7. A printing and display device according to paragraph 1, wherein the printer includes at least two the printheads, the printheads being disposed on either side of a path through which print media is fed for printing, thereby enabling substantially simultaneous printing of both sides of the print media.
8. A printing and display device according to paragraph 1, configured to receive print data to be printed, and display data to be displayed, from a computer system.

9. A printing and display device according to paragraph 8, wherein the printing and display device includes a connection configured to allow releasable operative connection of the computer system to the printing and display device, for receiving the print data and the display data from the computer system.
10. A printing a display device according to paragraph 9, wherein the connection includes at least one socket for accepting at least one corresponding data cable.
11. A printing and display device according to paragraph 9, wherein the connection includes a wireless receiver for receiving the print data and/or the display data.
12. A printing and display device according to paragraph 9, wherein the connection is a Universal Synchronous Bus (USB) connection.
13. A printing and display device according to paragraph 1, further including a paper feed mechanism for feeding paper to the printhead for printing, the printhead being arranged to print onto the paper.
14. A printing and display device according to paragraph 1, wherein the paper feed mechanism is configured to position the paper substantially parallel in at least one direction with respect to a plane defined by the flat panel display.
15. A printing and display device according to paragraph 13 or 14, wherein the paper feed mechanism is configured to accept a single sheet of paper at a time for printing.
16. A printing and display device according to paragraph 13 or 14, wherein the paper feed mechanism includes a paper separator for feeding a single sheet of paper to the printhead from a stack of sheets of paper.
17. A printing and display device according to paragraph 1, wherein the printer is a process color printer.

18. A printing and display device according to paragraph 1, wherein the printer is an inkjet printer.
19. A printing and display device according to paragraph 18, wherein the printer has more than 5,000 inkjet nozzles.
20. A printing and display device according to paragraph 1 or 19, wherein the printer is a page-width printer.
21. A printing and display device according to paragraph 1, wherein the flat panel display measures at least 14 inches on the diagonal.
22. A printing and display device according to paragraph 1, including at least two of the printheads, the printheads being disposed on either side of a path through which the paper is fed for printing, thereby enabling substantially simultaneous printing of both sides of a sheet of paper.
23. A printing and display device according to paragraph 1, configured to enable printing of standard A4 or Letter sized sheets of paper.
24. A printing and display device according to paragraph 1, configured such that paper to be printed is fed manually into a paper path that directs the paper from a region adjacent the upper edge of the flat panel display, past the printhead for printing, then out of the device adjacent a lower edge of the flat panel display.
25. A printing and display device according to paragraph 1, further including a curved paper guide disposed, when the device is in use, beneath the flat panel display, such that the paper that has been printed is urged horizontally as it exits the device.
26. A printing and display device according to paragraph 1, wherein the flat panel display is of one of the following types:
  - Liquid Crystal Display (LCD);
  - Organic Light Emitting Diode (OLED)

Field Emission Display (FED)

Plasma Display Panel (PDP)

27. A printing and display device according to paragraph 1, wherein the printhead is configured to receive halftoned print data to be printed onto the print media.
28. A printing and display device according to paragraph 1, further including a halftoning unit for generating halftoned image data and supplying it to the printhead for printing.
29. A printing and display device according to paragraph 1, wherein the printhead is configured to print photographic images.
30. A printing and display device according to paragraph 1, wherein the printhead is configured to print image and text data.
31. A printing and display device according to paragraph 8, wherein the computer system is a personal computer.

## FPDP04:

1. A printing and display device comprising:  
a flat panel display; and  
a printer, including a printhead for printing onto paper;  
the device being configured such that, during printing, the paper being printed passes between the flat panel display and the printhead, or passes behind the flat panel display and the printhead relative to a viewing position of the flat panel display.
2. A printing and display device according to paragraph 1, wherein the printhead is disposed adjacent a lower edge of the flat panel display.
3. A printing and display device according to paragraph 2, wherein the printhead extends horizontally, when the device is in use.
4. A printing and display device according to paragraph 1, wherein the printer includes at least two the printheads, the printheads being disposed on either side of a path through which print media is fed for printing, thereby enabling substantially simultaneous printing of both sides of the print media.
5. A printing and display device according to paragraph 1, configured to receive print data to be printed, and display data to be displayed, from a computer system.
6. A printing and display device according to paragraph 5, wherein the printing and display device includes a connection configured to allow releasable operative connection of the computer system to the printing and display device, for receiving the print data and the display data from the computer system.
7. A printing a display device according to paragraph 6, wherein the connection includes at least one socket for accepting at least one corresponding data cable.
8. A printing and display device according to paragraph 6, wherein the connection includes a wireless receiver for receiving the print data and/or the display data.

9. A printing and display device according to paragraph 6, wherein the connection is a Universal Synchronous Bus (USB) connection.
10. A printing and display device according to paragraph 1, further including a paper feed mechanism for feeding paper to the printhead for printing, the printhead being arranged to print onto the paper.
11. A printing and display device according to paragraph 1, wherein the paper feed mechanism is configured to position the paper substantially parallel in at least one direction with respect to a plane defined by the flat panel display.
12. A printing and display device according to paragraph 10 or 11, wherein the paper feed mechanism is configured to accept a single sheet of paper at a time for printing.
13. A printing and display device according to paragraph 10 or 11, wherein the paper feed mechanism includes a paper separator for feeding a single sheet of paper to the printhead from a stack of sheets of paper.
14. A printing and display device according to paragraph 1, wherein the printer is a process color printer.
15. A printing and display device according to paragraph 1, wherein the printer is an inkjet printer.
16. A printing and display device according to paragraph 15, wherein the printer has more than 5,000 inkjet nozzles.
17. A printing and display device according to paragraph 1 or 16, wherein the printer is a page-width printer.
18. A printing and display device according to paragraph 1, wherein the flat panel display measures at least 14 inches on the diagonal.



19. A printing and display device according to paragraph 1, including at least two of the printheads, the printheads being disposed on either side of a path through which the paper is fed for printing, thereby enabling substantially simultaneous printing of both sides of a sheet of paper.
20. A printing and display device according to paragraph 1, configured to enable printing of standard A4 or Letter sized sheets of paper.
21. A printing and display device according to paragraph 1, configured such that paper to be printed is fed manually into a paper path that directs the paper from a region adjacent the upper edge of the flat panel display, past the printhead for printing, then out of the device adjacent a lower edge of the flat panel display.
22. A printing and display device according to paragraph 1, further including a curved paper guide disposed, when the device is in use, beneath the flat panel display, such that the paper that has been printed is urged horizontally as it exits the device.
23. A printing and display device according to paragraph 1, wherein the flat panel display is of one of the following types:
- Liquid Crystal Display (LCD);
  - Organic Light Emitting Diode (OLED)
  - Field Emission Display (FED)
  - Plasma Display Panel (PDP)
24. A printing and display device according to paragraph 1, wherein the printhead is configured to receive halftoned print data to be printed onto the print media.
25. A printing and display device according to paragraph 1, further including a halftoning unit for generating halftoned image data and supplying it to the printhead for printing.
26. A printing and display device according to paragraph 1, wherein the printhead is configured to print photographic images.

27. A printing and display device according to paragraph 1, wherein the printhead is configured to print image and text data.
28. A printing and display device according to paragraph 5, wherein the computer system is a personal computer.

**FPDP05:**

1. A printing and display device comprising:
  - a flat panel display;
  - a printer, including a printhead for printing onto paper;
  - a multi-sheet paper holder;
  - a paper sheet separator configured to separate a single paper sheet from the paper in the paper holder for supply to the printhead.
2. A printing and display device according to paragraph 1, wherein the printer includes at least two the printheads, the printheads being disposed on either side of a path through which print media is fed for printing, thereby enabling substantially simultaneous printing of both sides of the print media.
3. A printing and display device according to paragraph 1, configured to receive print data to be printed, and display data to be displayed, from a computer system.
4. A printing and display device according to paragraph 3, wherein the printing and display device includes a connection configured to allow releasable operative connection of the computer system to the printing and display device, for receiving the print data and the display data from the computer system.
5. A printing a display device according to paragraph 4, wherein the connection includes at least one socket for accepting at least one corresponding data cable.
6. A printing and display device according to paragraph 4, wherein the connection includes a wireless receiver for receiving the print data and/or the display data.
7. A printing and display device according to paragraph 4, wherein the connection is a Universal Synchronous Bus (USB) connection.
8. A printing and display device according to paragraph 1, further including a paper feed mechanism for feeding paper to the printhead for printing, the printhead being arranged to print onto the paper.

9. A printing and display device according to paragraph 8, wherein the paper feed mechanism is configured to position the paper substantially parallel in at least one direction with respect to a plane defined by the flat panel display.
10. A printing and display device according to paragraph 8 or 9, wherein the paper feed mechanism is configured to accept a single sheet of paper at a time for printing.
11. A printing and display device according to paragraph 8 or 9, wherein the paper feed mechanism includes a paper separator for feeding a single sheet of paper to the printhead from a stack of sheets of paper.
12. A printing and display device according to paragraph 1, wherein the printer is a process color printer.
13. A printing and display device according to paragraph 1, wherein the printer is an inkjet printer.
14. A printing and display device according to paragraph 13, wherein the printer has more than 5,000 inkjet nozzles.
15. A printing and display device according to paragraph 1 or 14, wherein the printer is a page-width printer.
16. A printing and display device according to paragraph 1, wherein the flat panel display measures at least 14 inches on the diagonal.
17. A printing and display device according to paragraph 1, including at least two of the printheads, the printheads being disposed on either side of a path through which the paper is fed for printing, thereby enabling substantially simultaneous printing of both sides of a sheet of paper.

18. A printing and display device according to paragraph 1, configured to enable printing of standard A4 or Letter sized sheets of paper.
19. A printing and display device according to paragraph 1, configured such that paper to be printed is fed manually into a paper path that directs the paper from a region adjacent the upper edge of the flat panel display, past the printhead for printing, then out of the device adjacent a lower edge of the flat panel display.
20. A printing and display device according to paragraph 1, further including a curved paper guide disposed, when the device is in use, beneath the flat panel display, such that the paper that has been printed is urged horizontally as it exits the device.
21. A printing and display device according to paragraph 1, wherein the flat panel display is of one of the following types:
  - Liquid Crystal Display (LCD);
  - Organic Light Emitting Diode (OLED)
  - Field Emission Display (FED)
  - Plasma Display Panel (PDP)
22. A printing and display device according to paragraph 1, wherein the printhead is configured to receive halftoned print data to be printed onto the print media.
23. A printing and display device according to paragraph 1, further including a halftoning unit for generating halftoned image data and supplying it to the printhead for printing.
24. A printing and display device according to paragraph 1, wherein the printhead is configured to print photographic images.
25. A printing and display device according to paragraph 1, wherein the printhead is configured to print image and text data.

26. A printing and display device according to paragraph 3, wherein the computer system is a personal computer.

## FPDP06:

1. A printing and display device comprising:  
a flat panel display for displaying images from a computer; and  
a printer, the printer including at least two the printheads, the printheads being disposed on either side of a path through which print media is fed for printing, thereby enabling substantially simultaneous printing of both sides of the print media.
2. A printing and display device according to paragraph 1, configured to receive print data to be printed, and display data to be displayed, from a computer system.
3. A printing and display device according to paragraph 2, wherein the printing and display device includes a connection configured to allow releasable operative connection of the computer system to the printing and display device, for receiving the print data and the display data from the computer system.
4. A printing a display device according to paragraph 3, wherein the connection includes at least one socket for accepting at least one corresponding data cable.
5. A printing and display device according to paragraph 3, wherein the connection includes a wireless receiver for receiving the print data and/or the display data.
6. A printing and display device according to paragraph 3, wherein the connection is a Universal Synchronous Bus (USB) connection.
7. A printing and display device according to paragraph 1, further including a paper feed mechanism for feeding paper to the printhead for printing, the printhead being arranged to print onto the paper.
8. A printing and display device according to paragraph 7, wherein the paper feed mechanism is configured to position the paper substantially parallel in at least one direction with respect to a plane defined by the flat panel display.

9. A printing and display device according to paragraph 7 or 8, wherein the paper feed mechanism is configured to accept a single sheet of paper at a time for printing.
10. A printing and display device according to paragraph 7 or 8, wherein the paper feed mechanism includes a paper separator for feeding a single sheet of paper to the printhead from a stack of sheets of paper.
11. A printing and display device according to paragraph 1, wherein the printer is a process color printer.
12. A printing and display device according to paragraph 1, wherein the printer is an inkjet printer.
13. A printing and display device according to paragraph 12, wherein the printer has more than 5,000 inkjet nozzles.
14. A printing and display device according to paragraph 1 or 12, wherein the printer is a page-width printer.
15. A printing and display device according to paragraph 1, wherein the flat panel display measures at least 14 inches on the diagonal.
16. A printing and display device according to paragraph 1, configured to enable printing of standard A4 or Letter sized sheets of paper.
17. A printing and display device according to paragraph 1, configured such that paper to be printed is fed manually into a paper path that directs the paper from a region adjacent the upper edge of the flat panel display, past the printhead for printing, then out of the device adjacent a lower edge of the flat panel display.
18. A printing and display device according to paragraph 1, further including a curved paper guide disposed, when the device is in use, beneath the flat panel display, such that the paper that has been printed is urged horizontally as it exits the device.



19. A printing and display device according to paragraph 1, wherein the flat panel display is of one of the following types:

Liquid Crystal Display (LCD);  
Organic Light Emitting Diode (OLED)  
Field Emission Display (FED)  
Plasma Display Panel (PDP)

20. A printing and display device according to paragraph 1, wherein the printhead is configured to receive halftoned print data to be printed onto the print media.

21. A printing and display device according to paragraph 1, further including a halftoning unit for generating halftoned image data and supplying it to the printhead for printing.

22. A printing and display device according to paragraph 1, wherein the printhead is configured to print photographic images.

23. A printing and display device according to paragraph 1, wherein the printhead is configured to print image and text data.

24. A printing and display device according to paragraph 2, wherein the computer system is a personal computer.

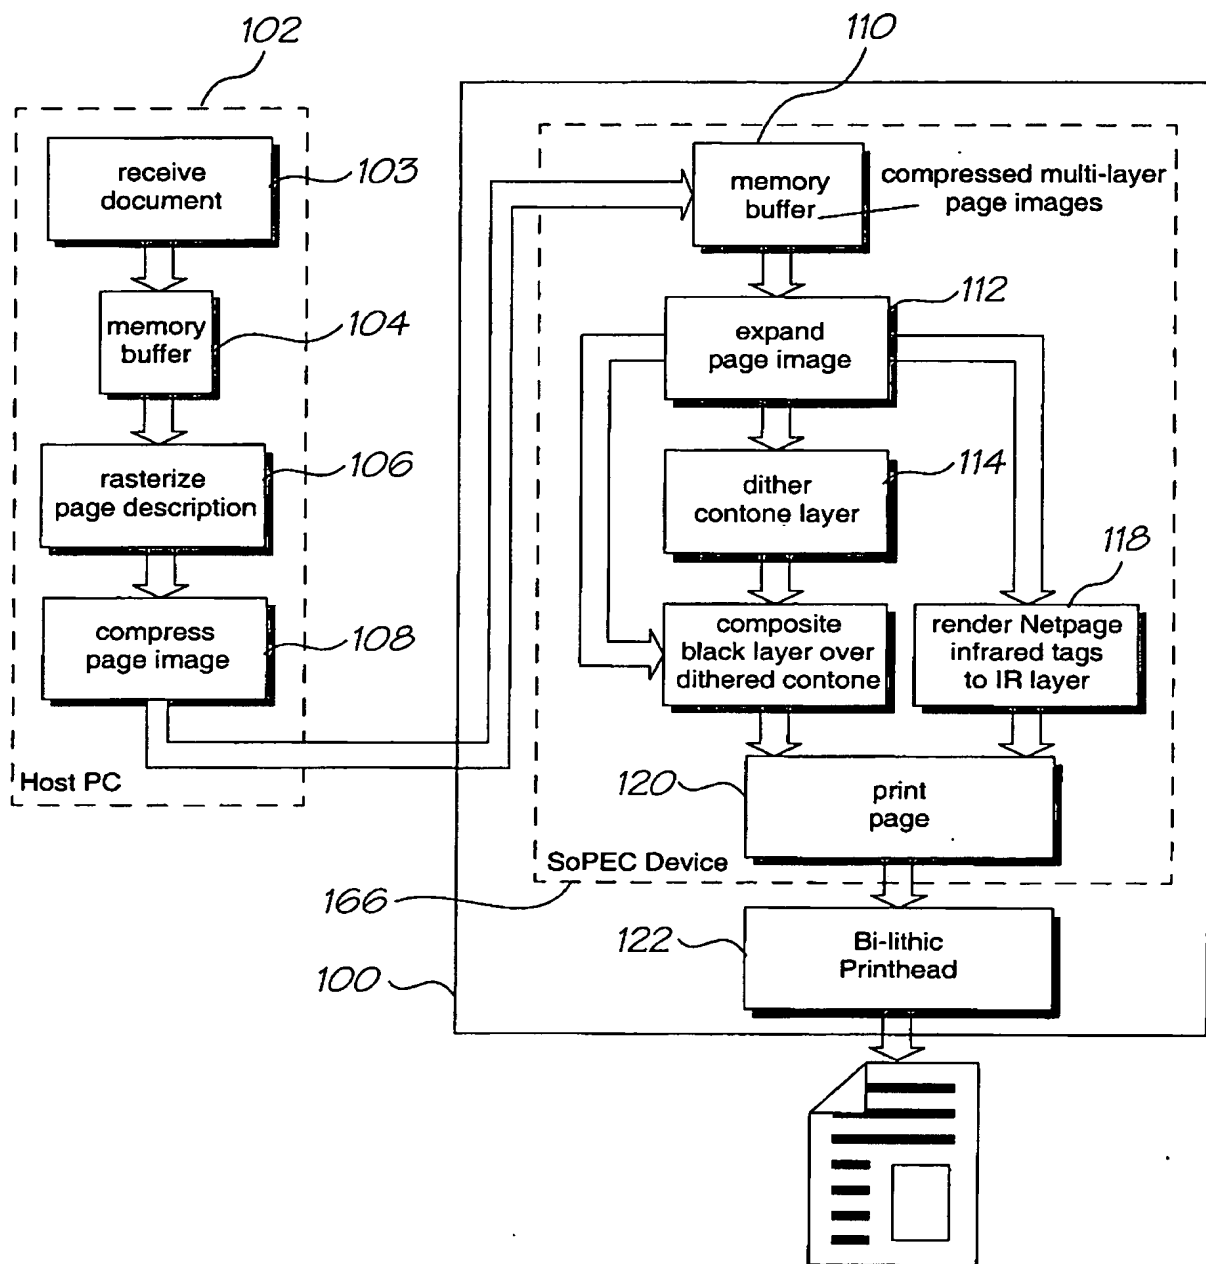


FIG. 1

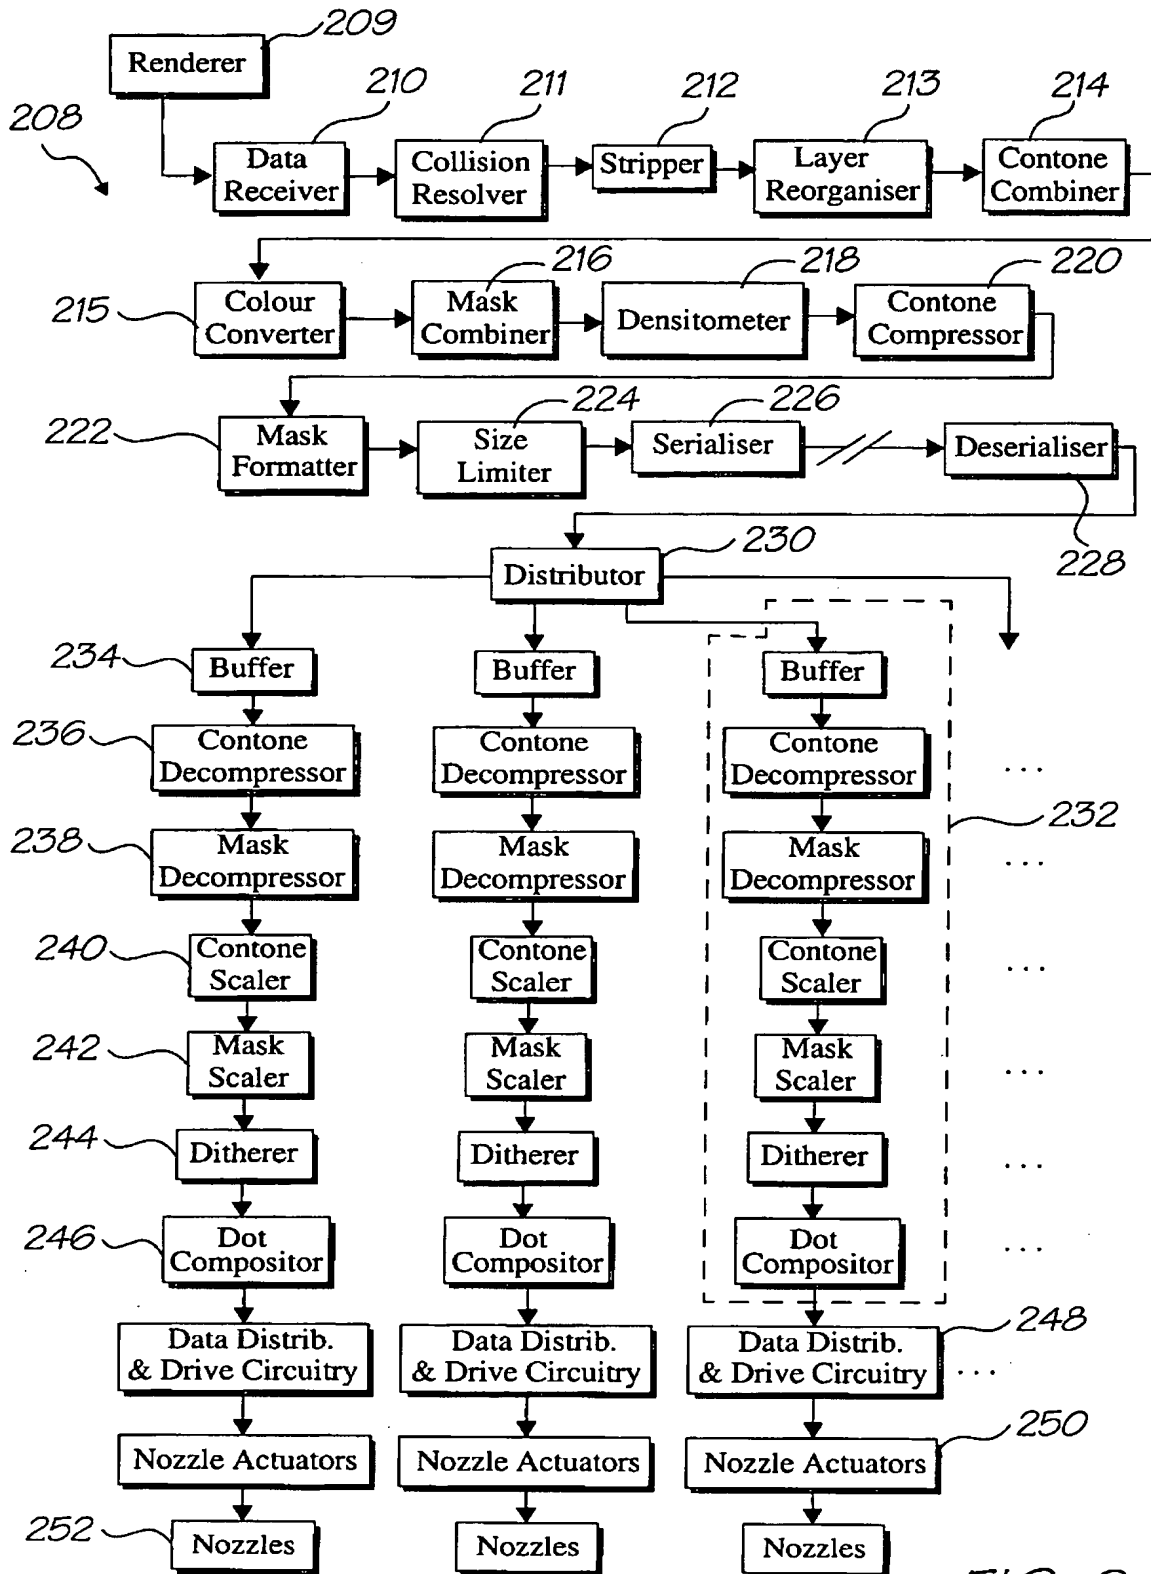


FIG. 2

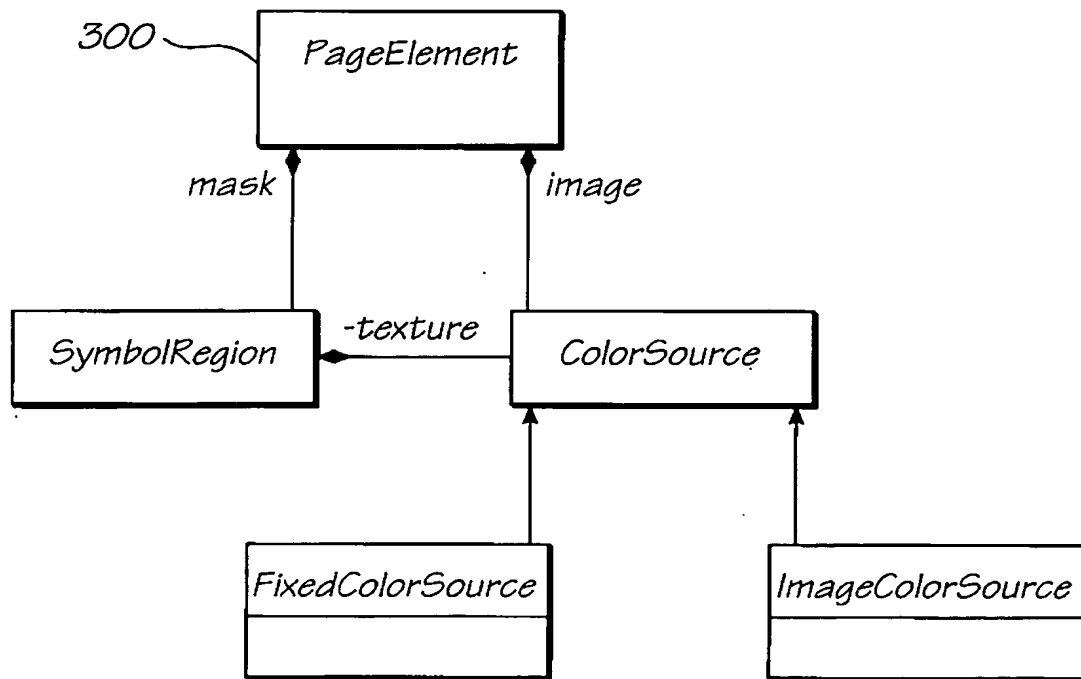


FIG. 3

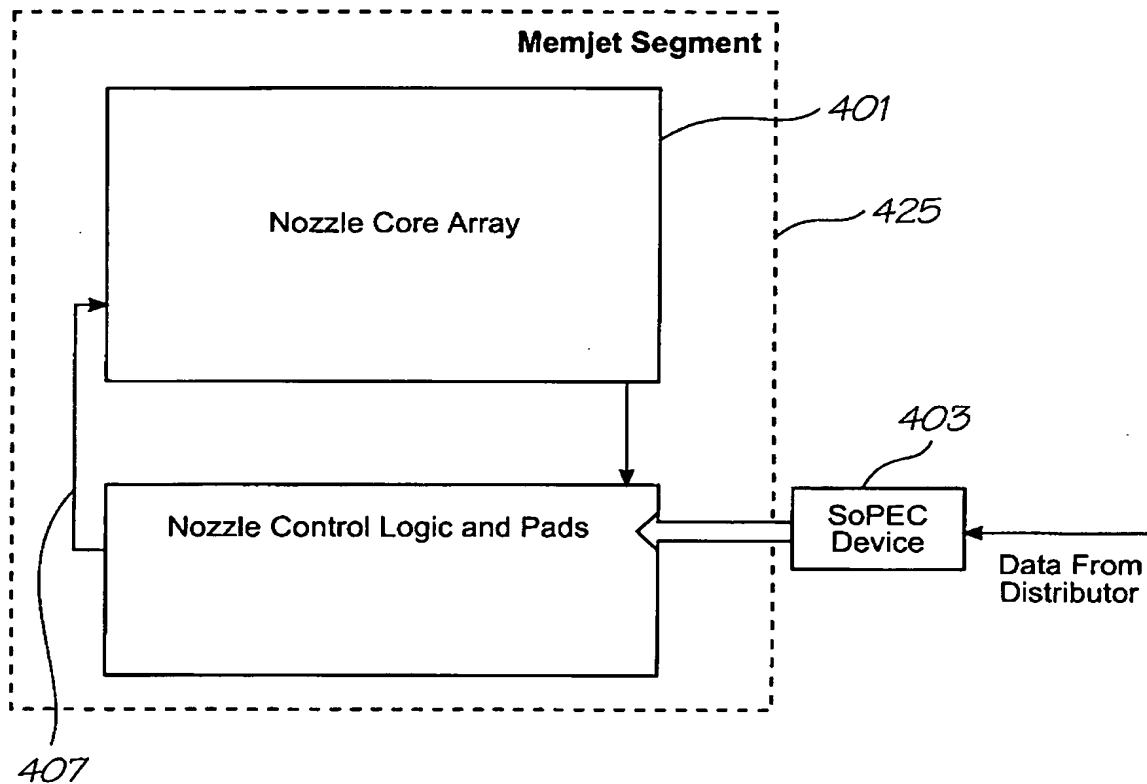


FIG. 4

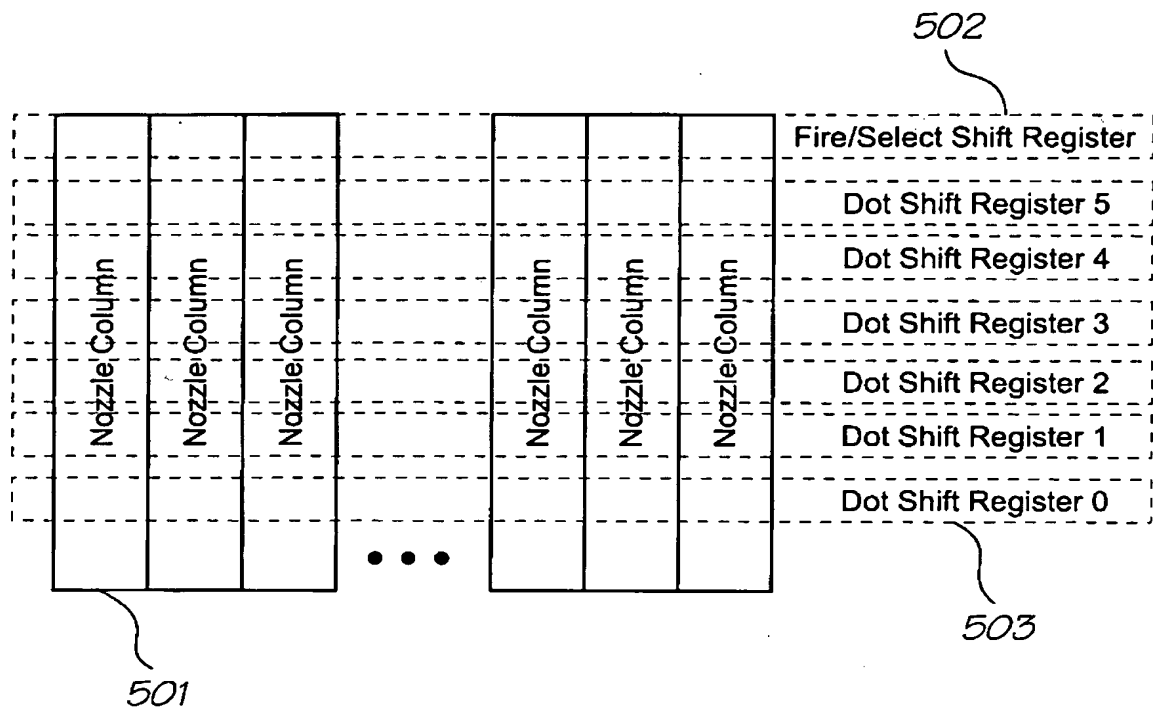


FIG. 5

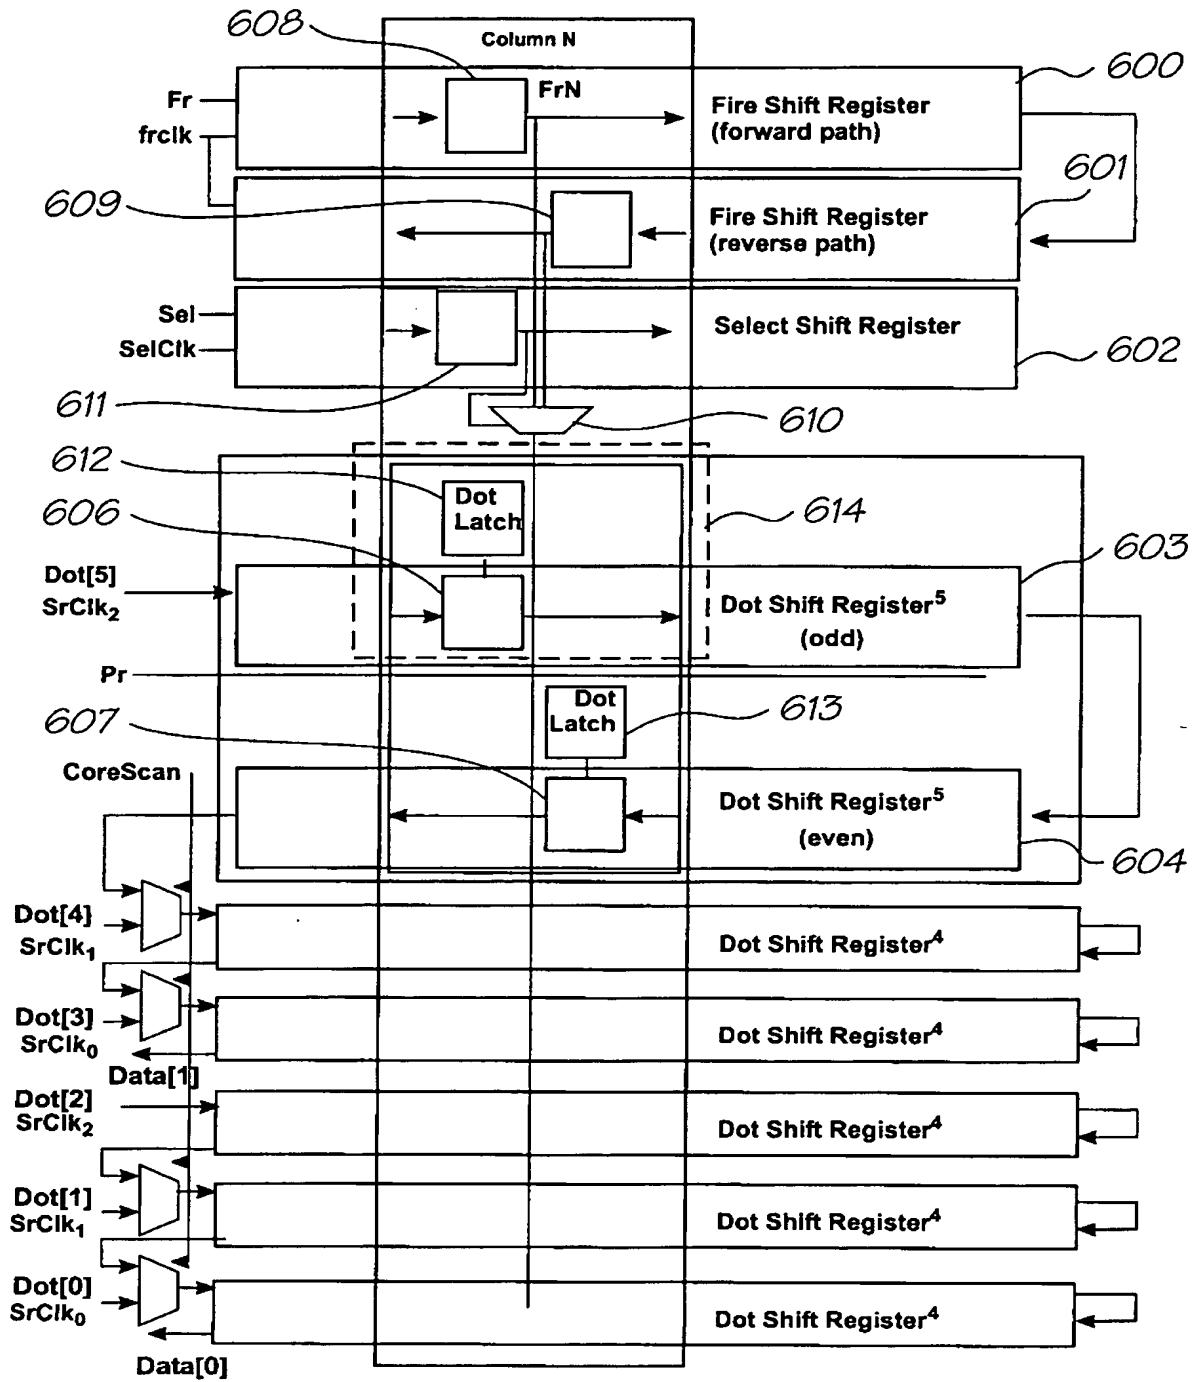


FIG. 6

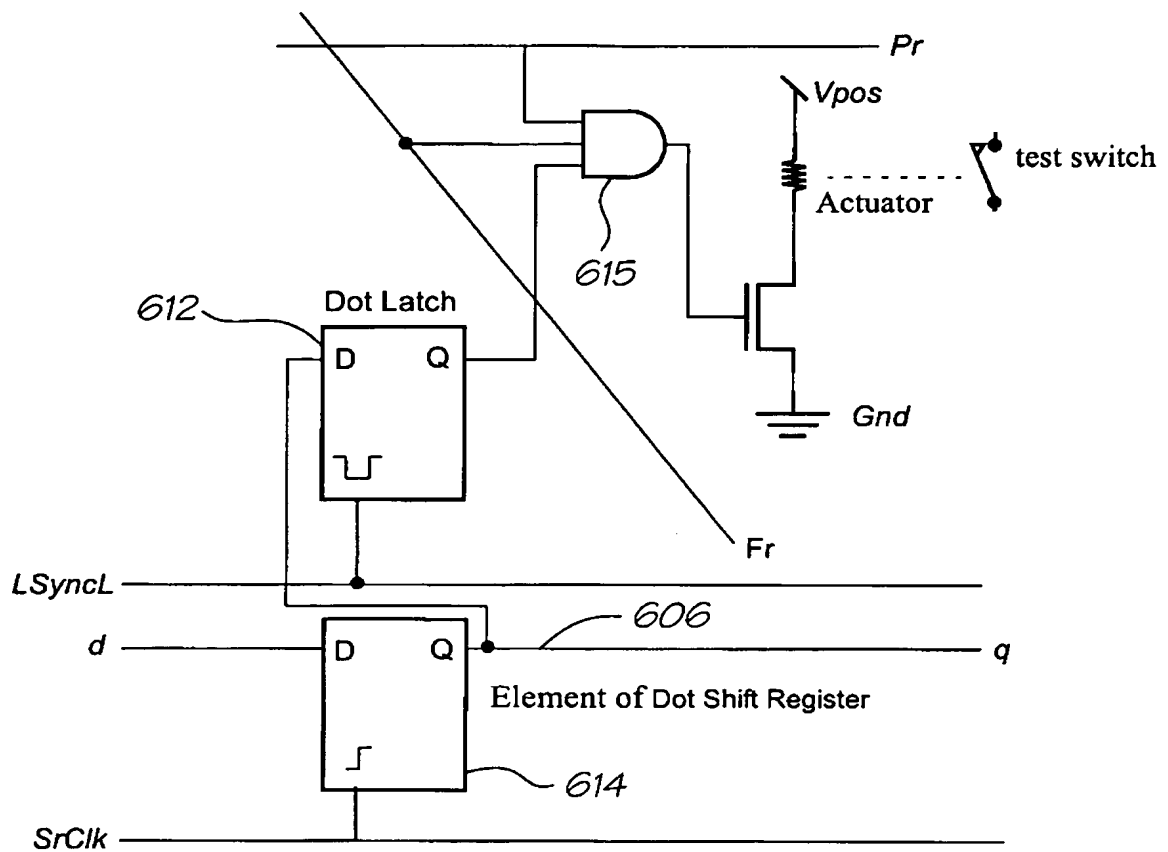


FIG. 7



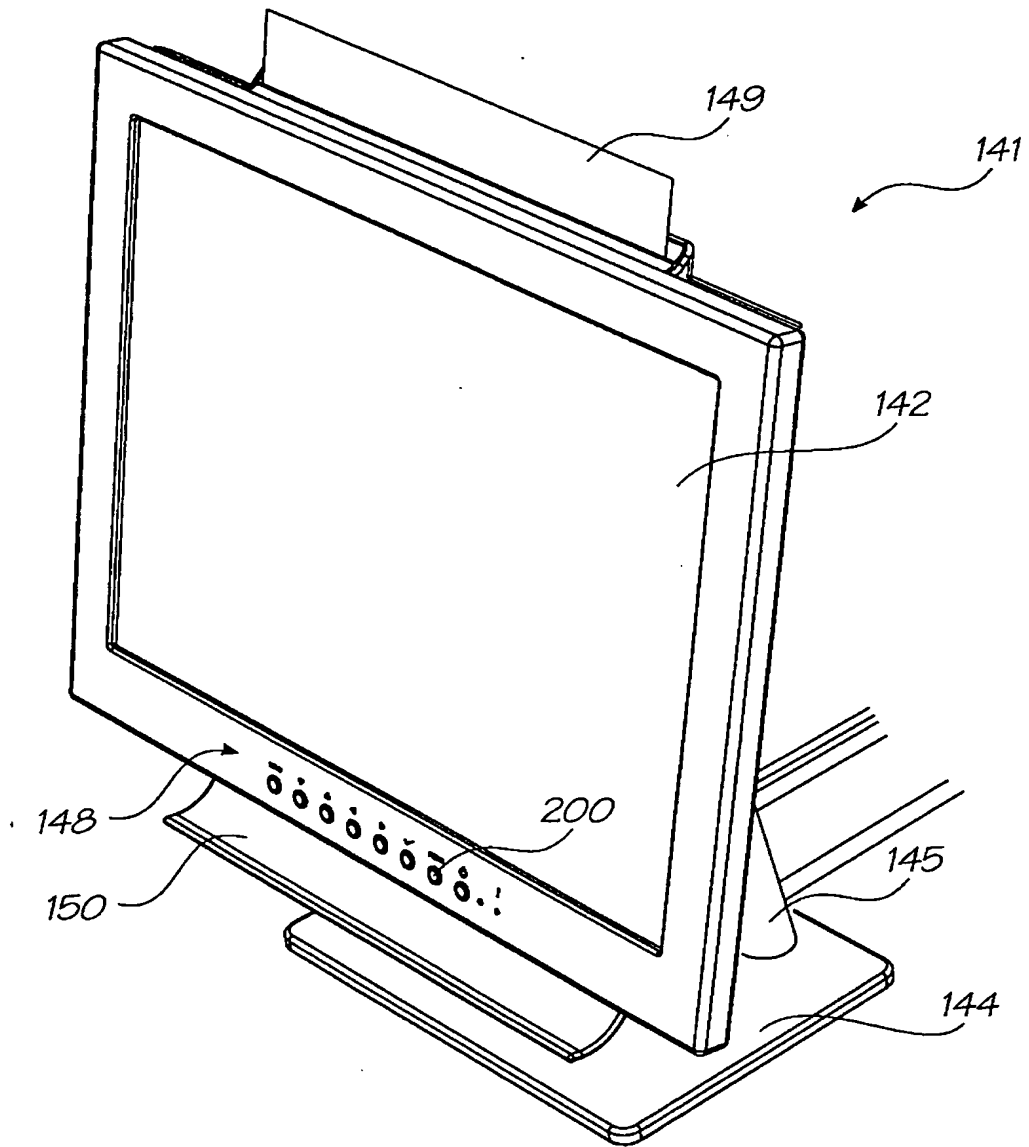


FIG. 14

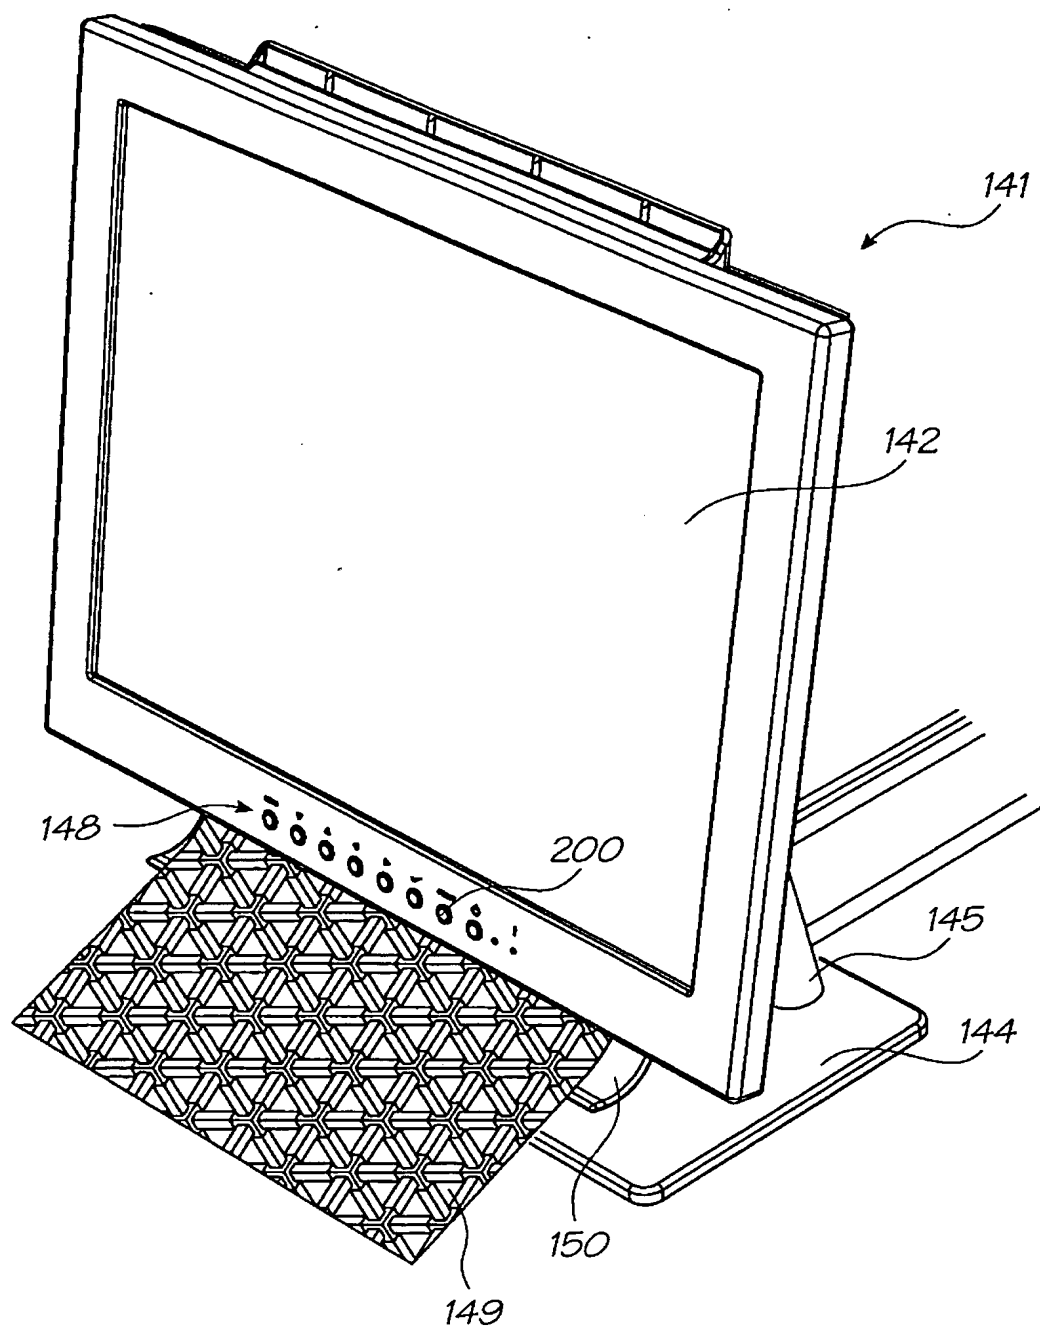


FIG. 15

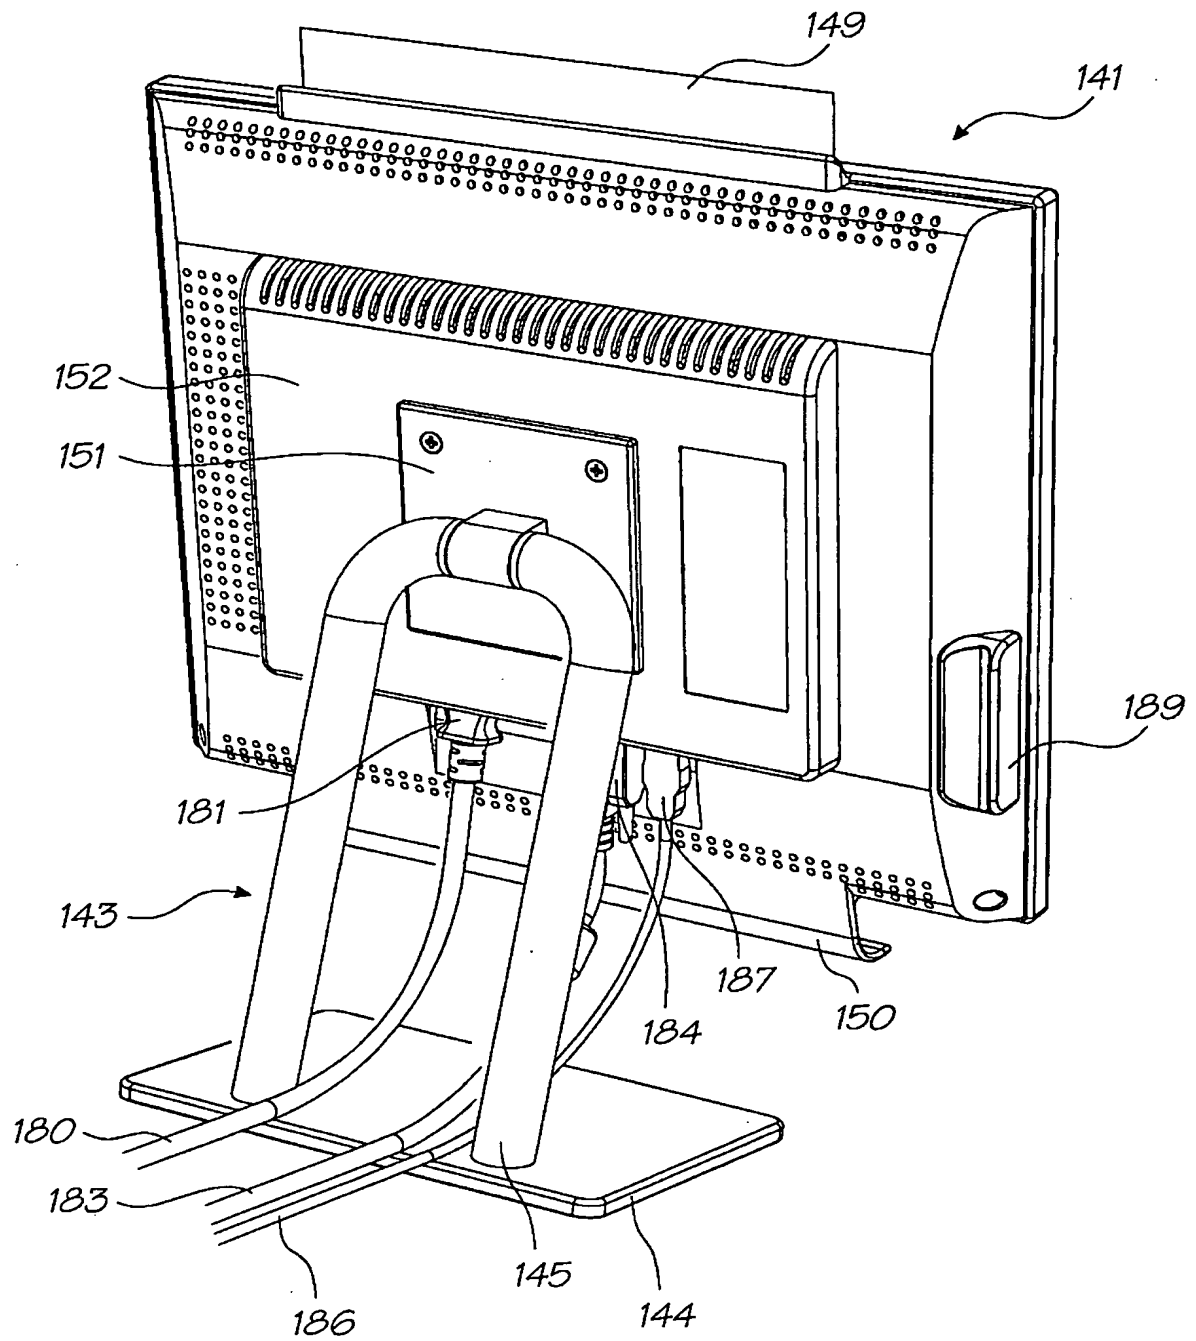


FIG. 16

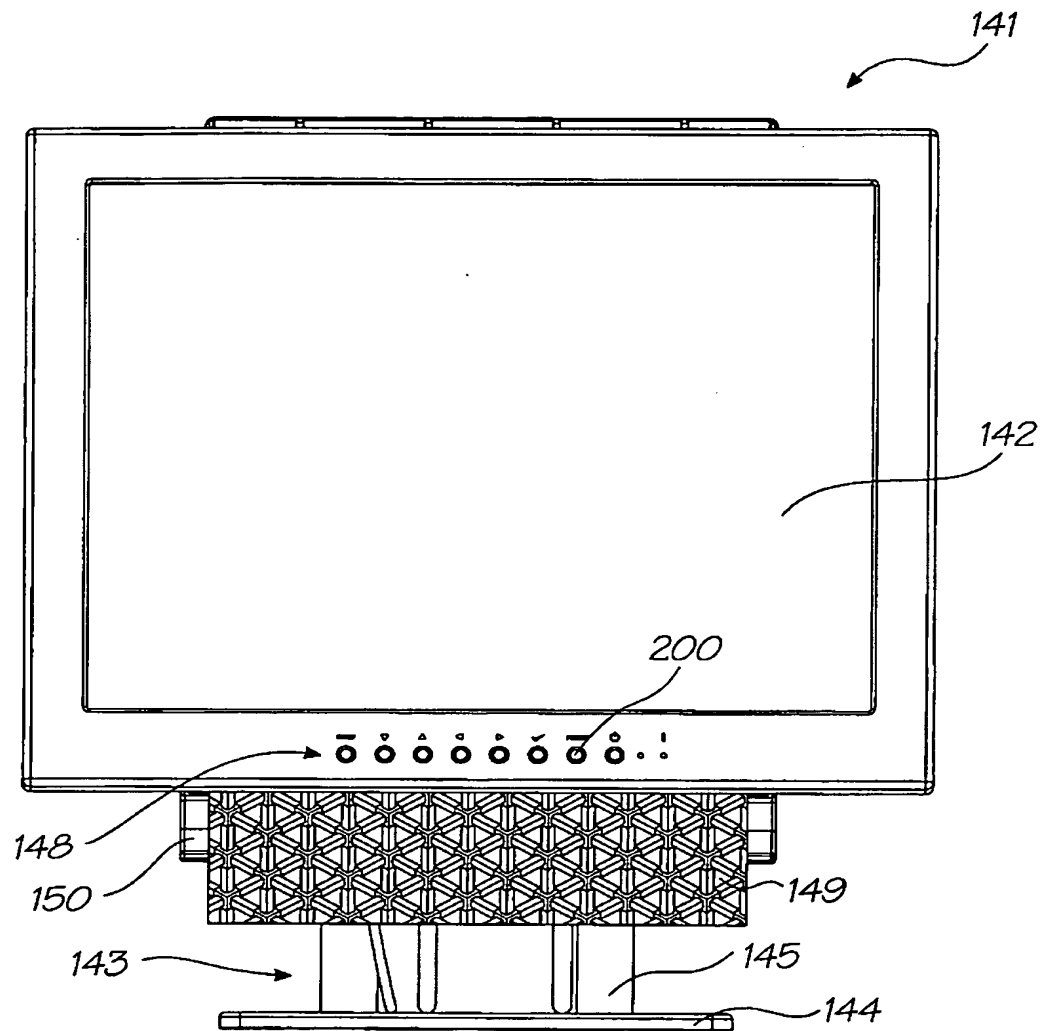


FIG. 17

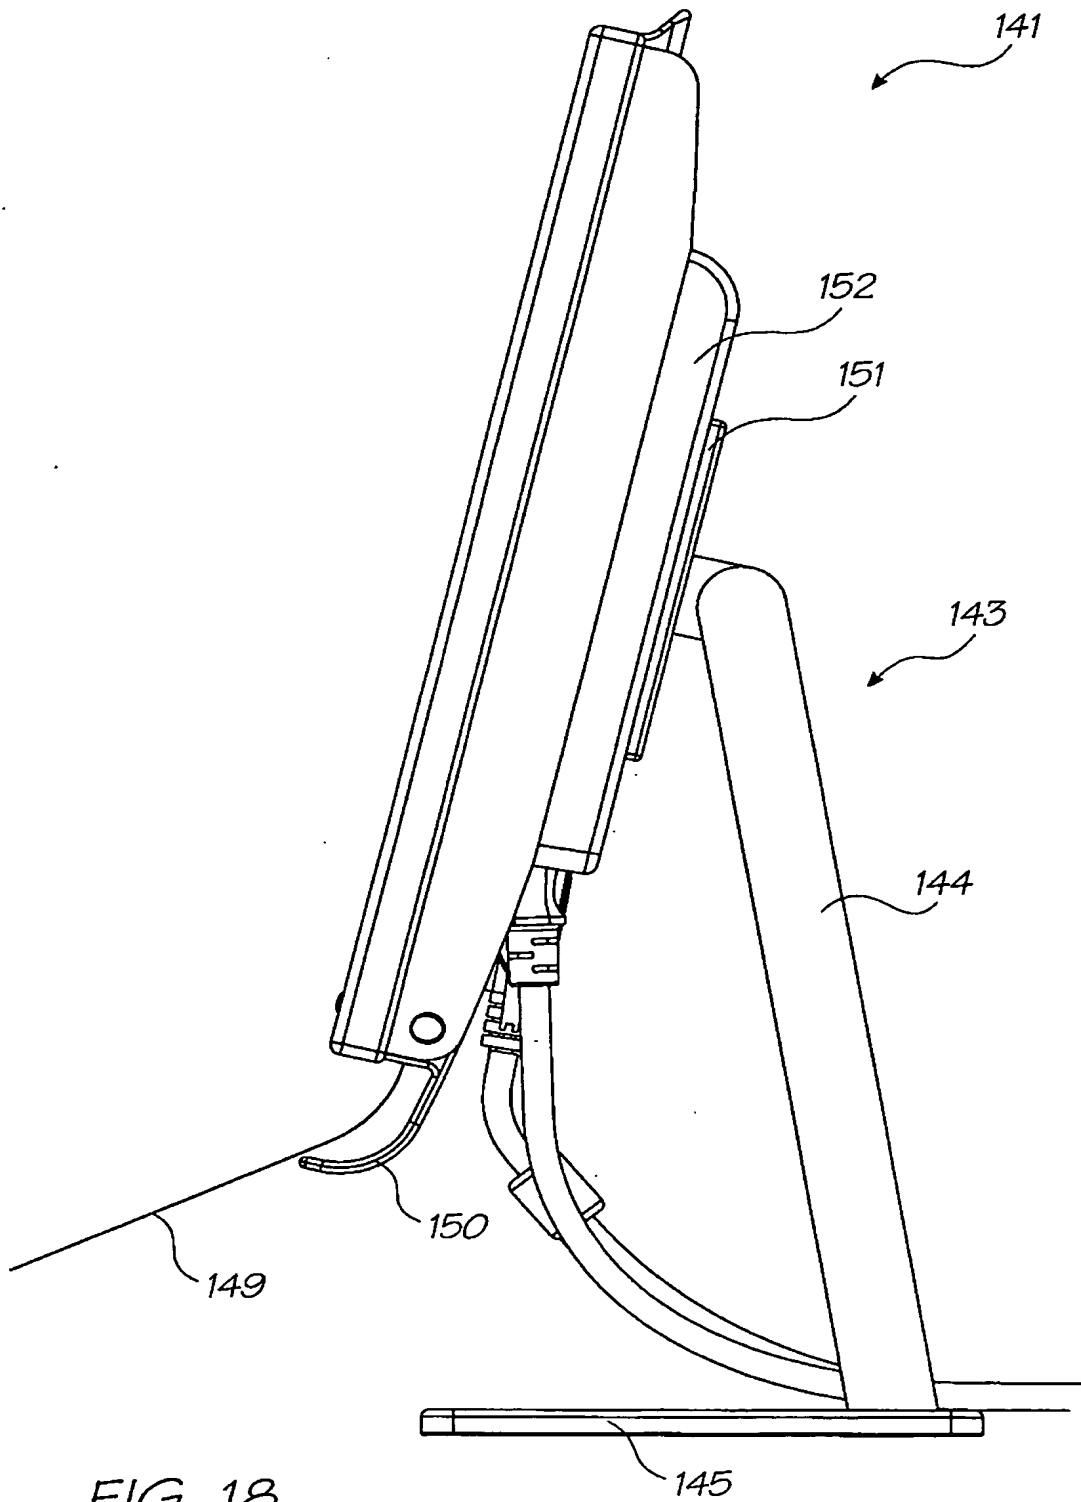


FIG. 18

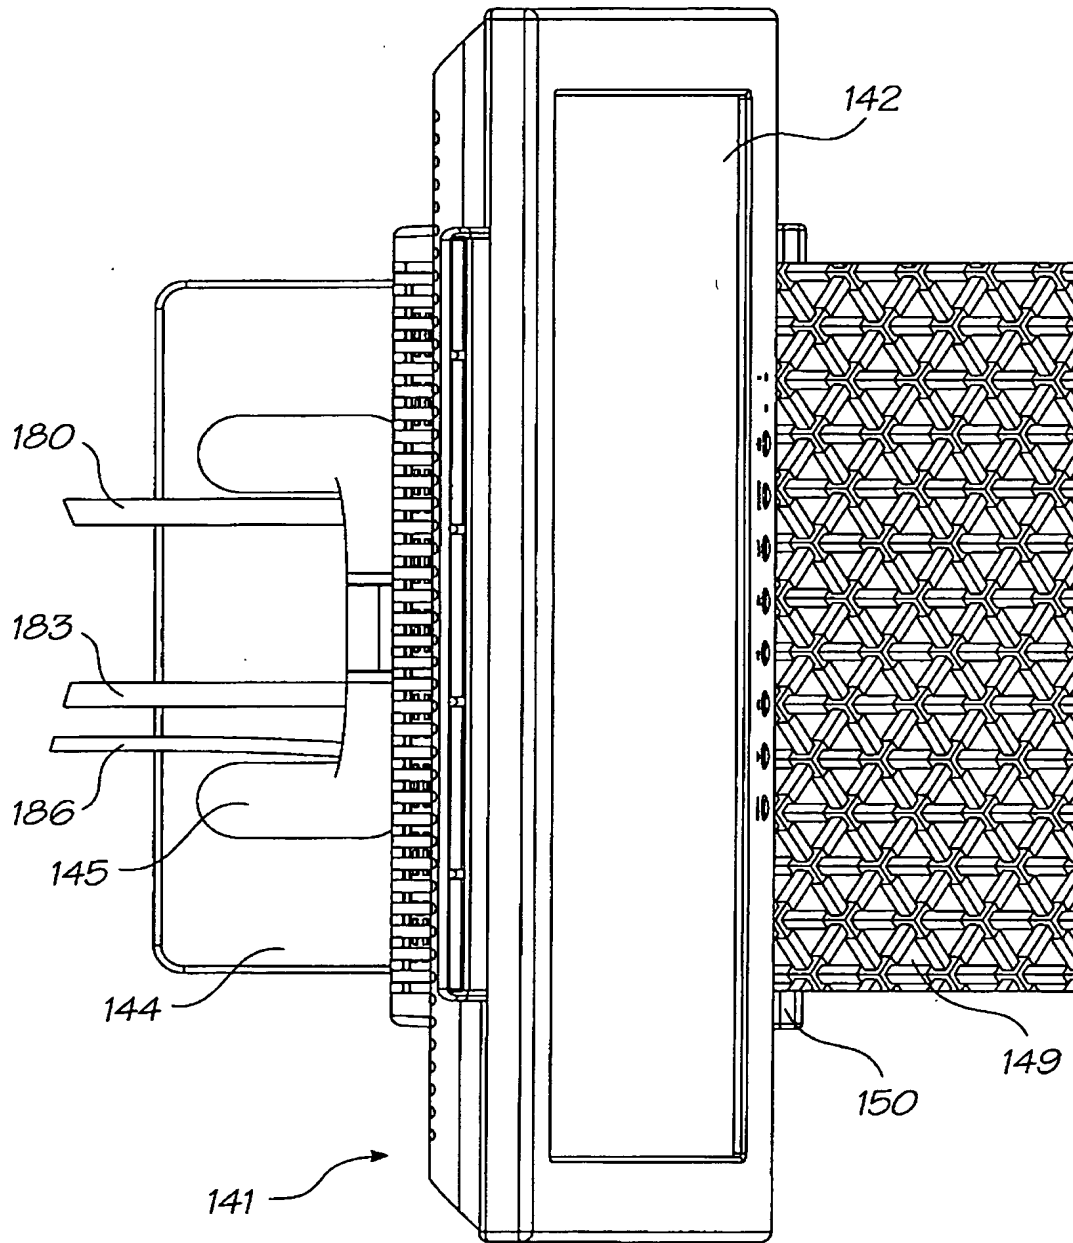


FIG. 19

14/50

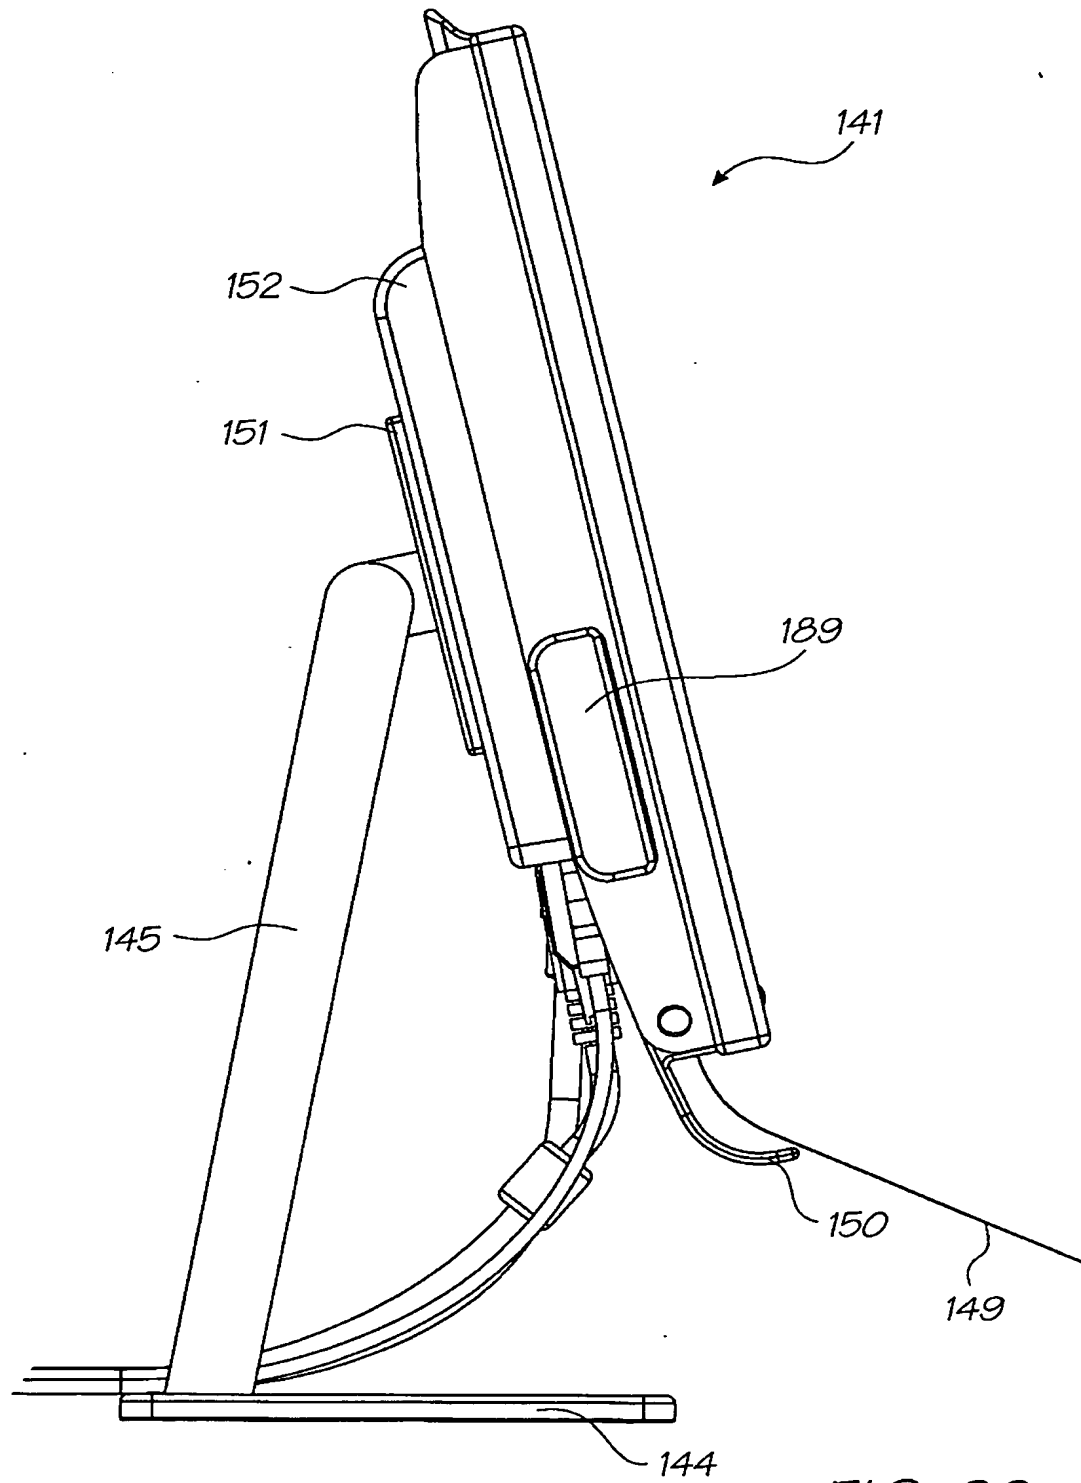


FIG. 20

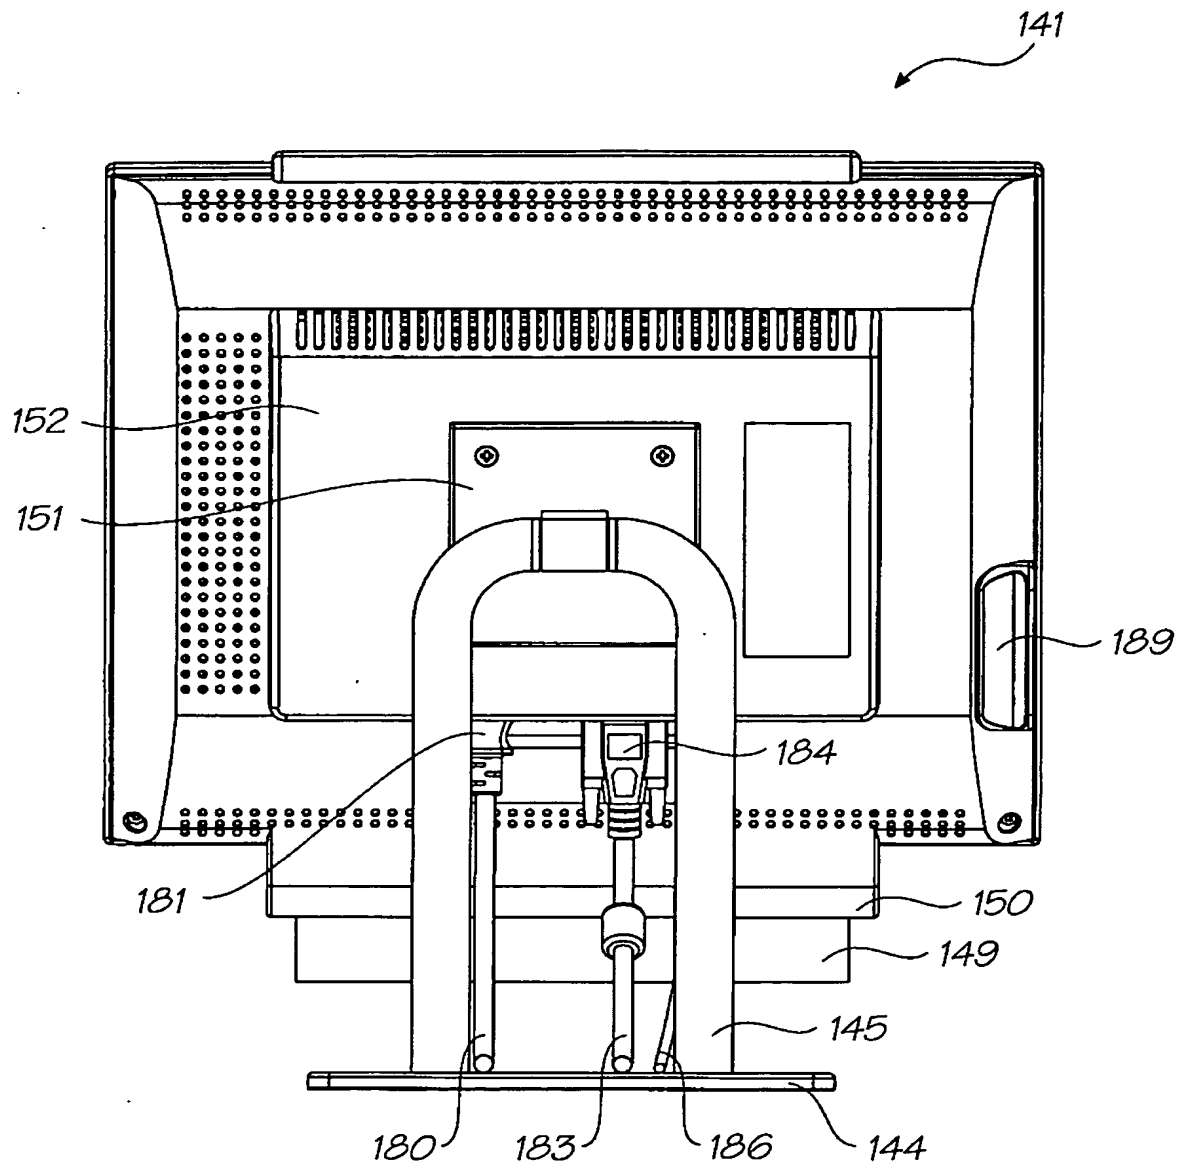


FIG. 21



16/50

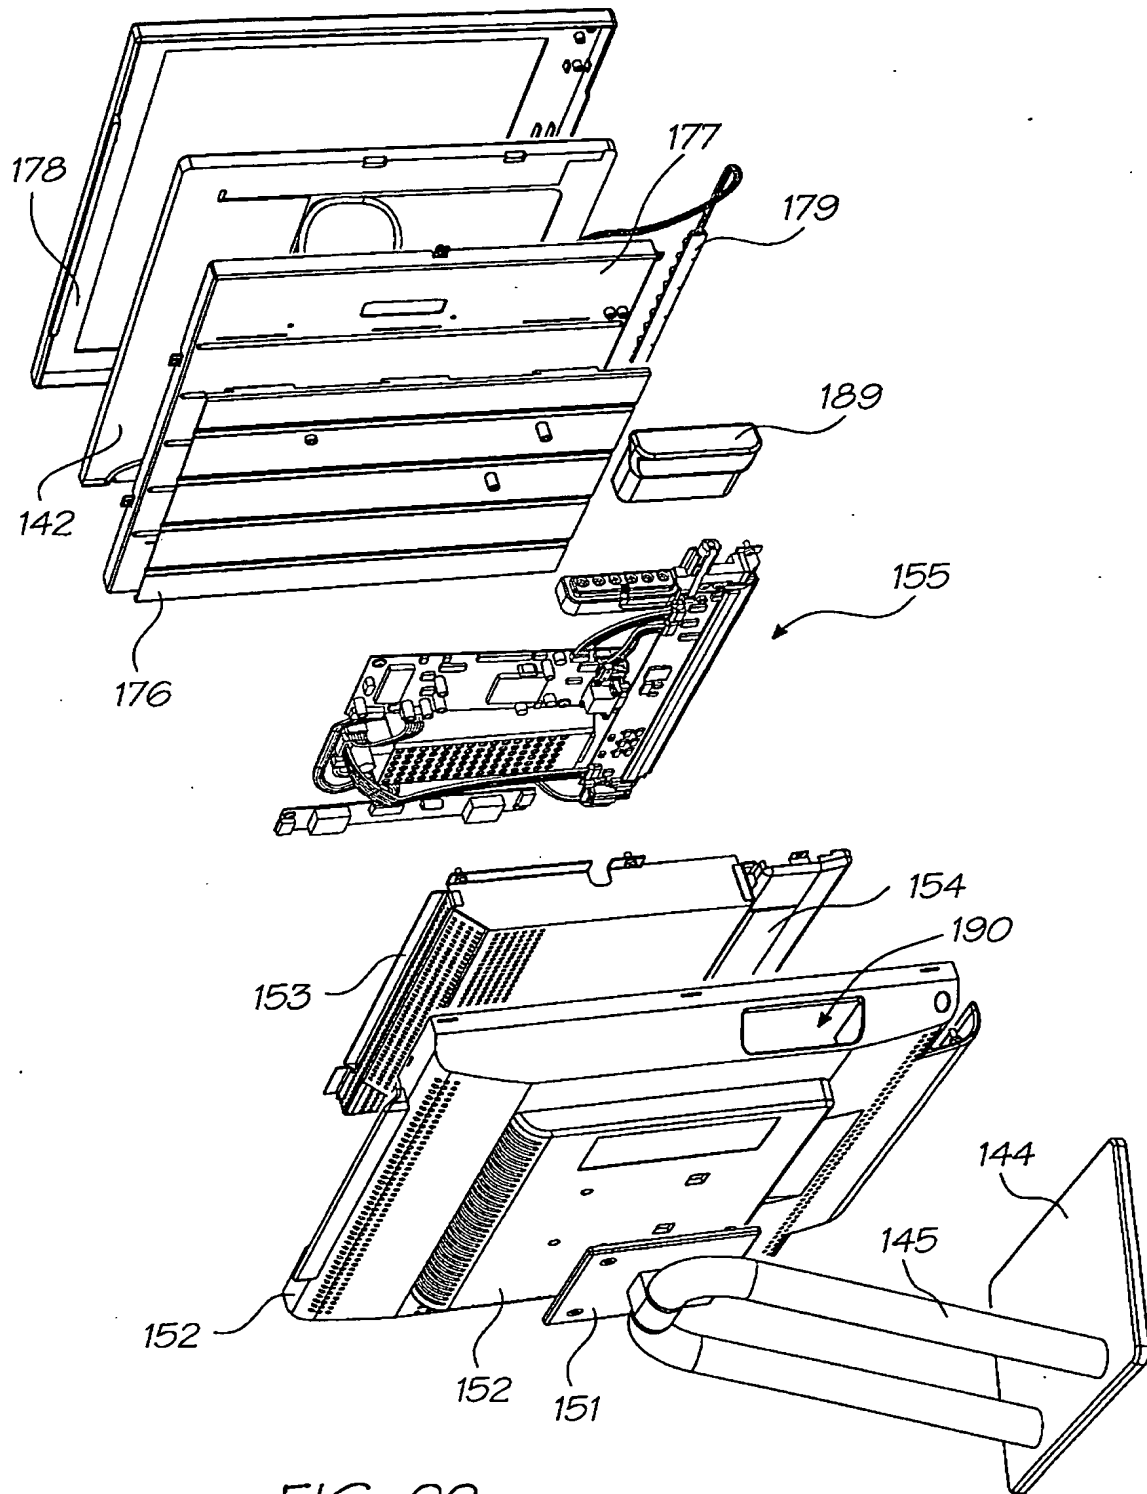


FIG. 22

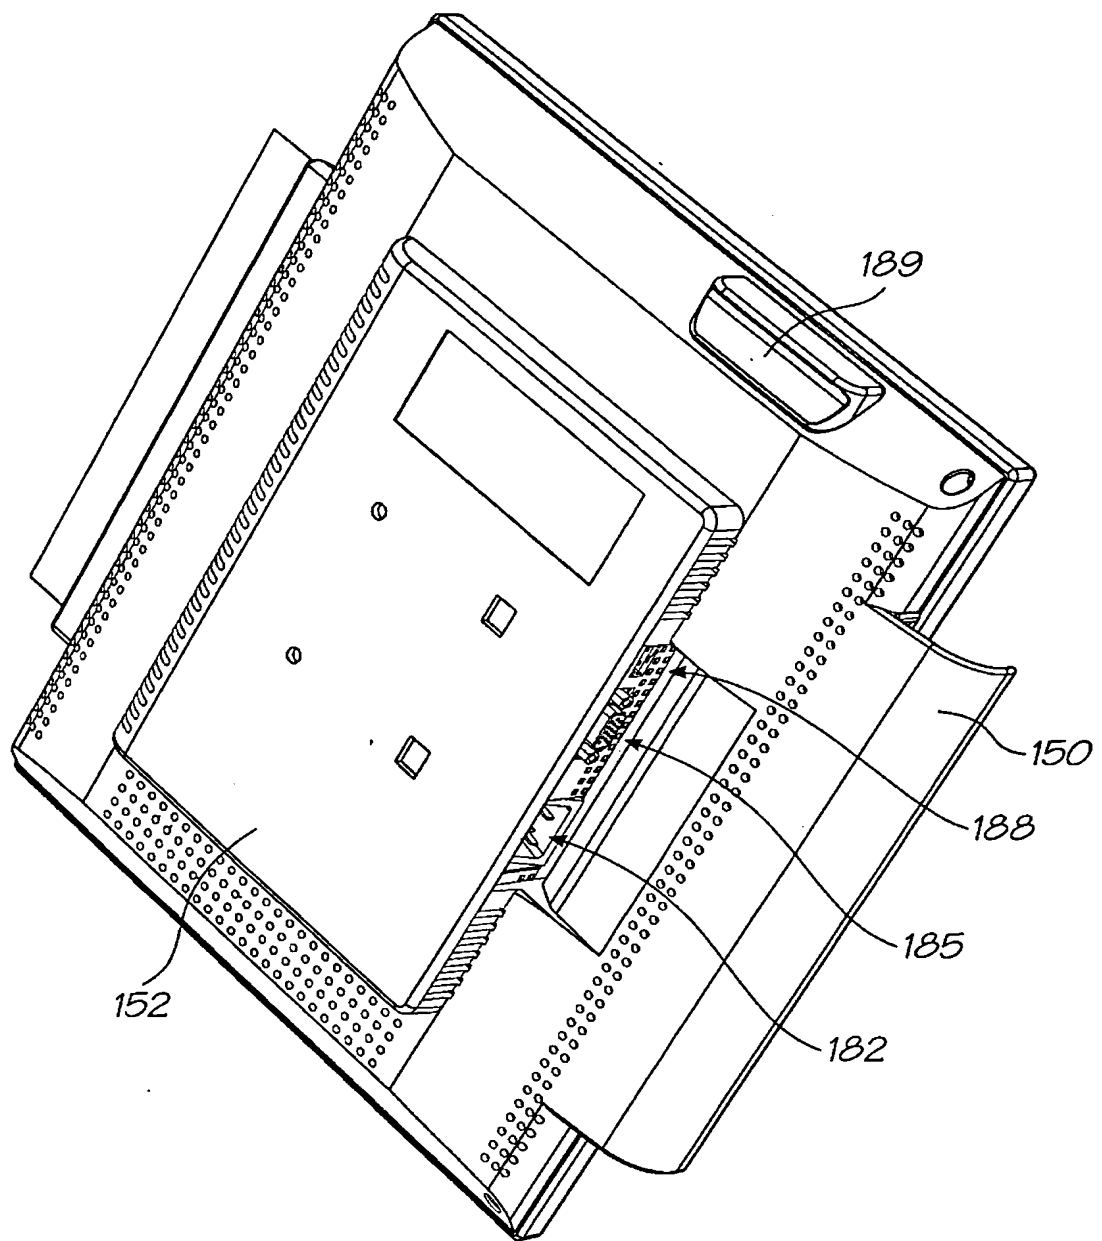


FIG. 23

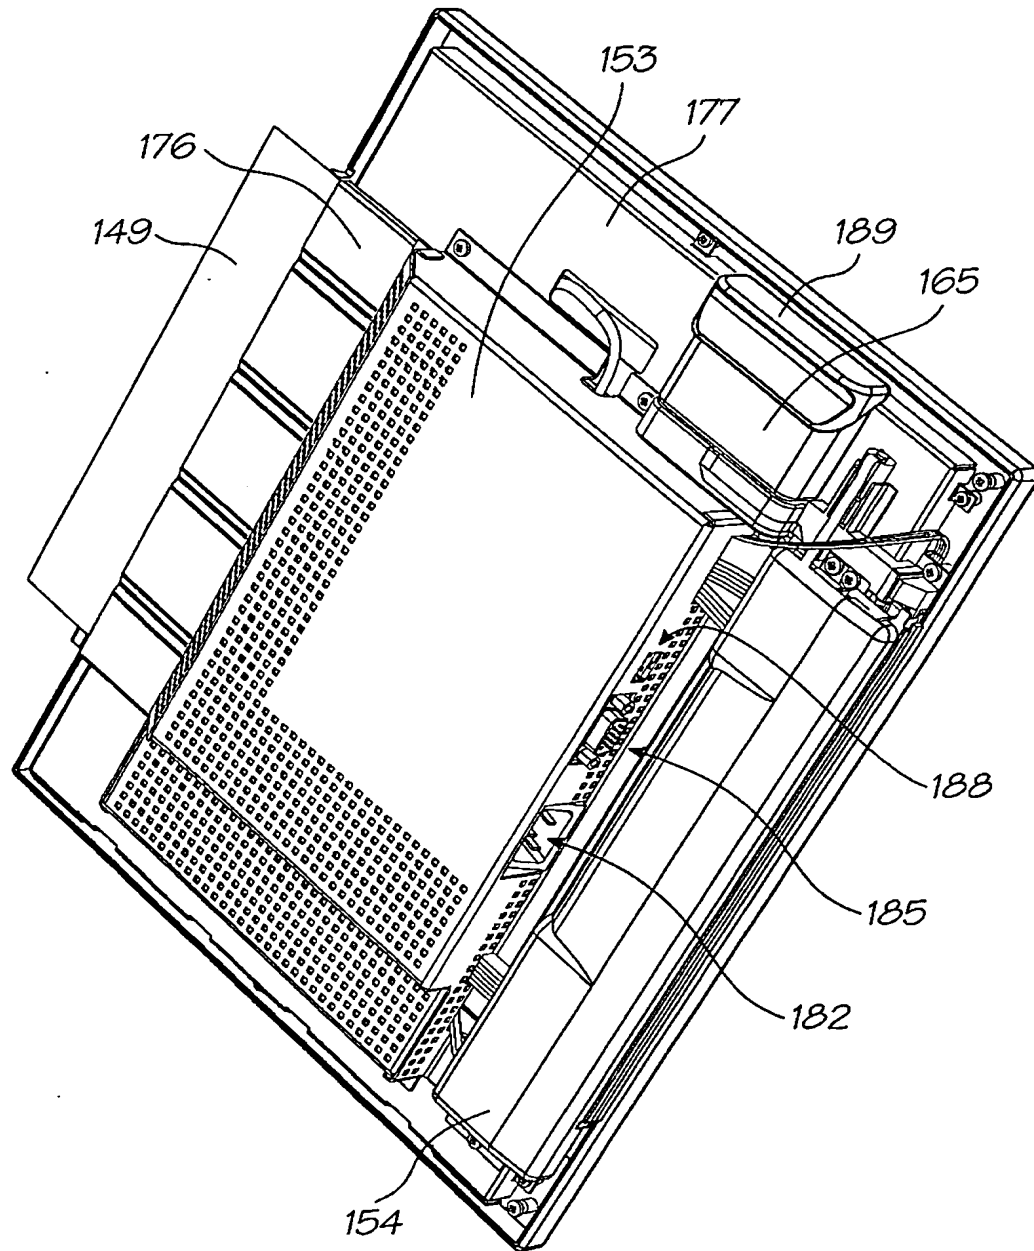


FIG. 24

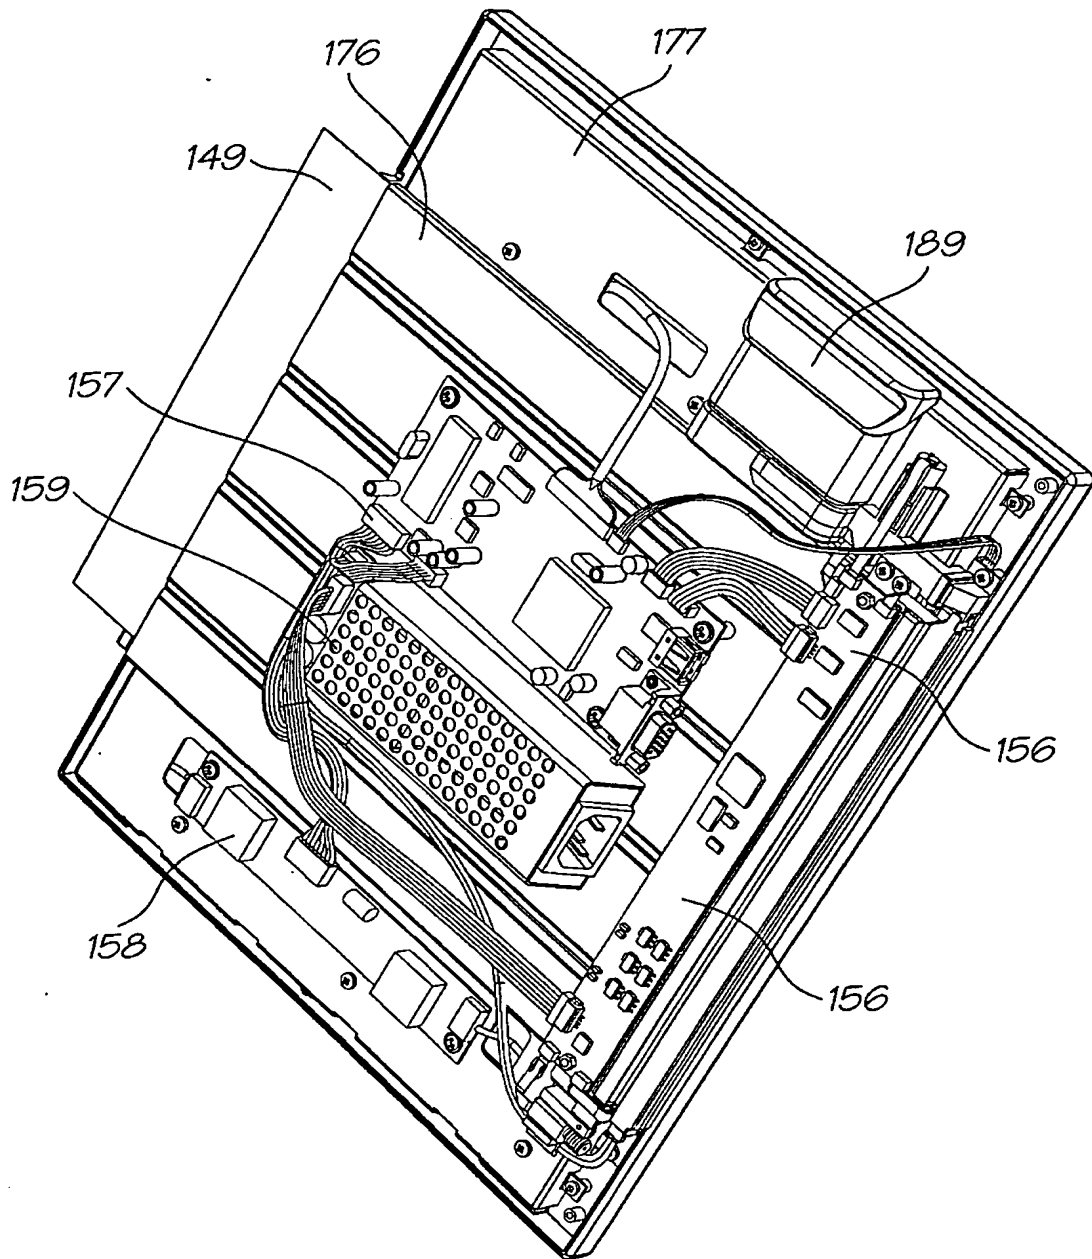


FIG. 25

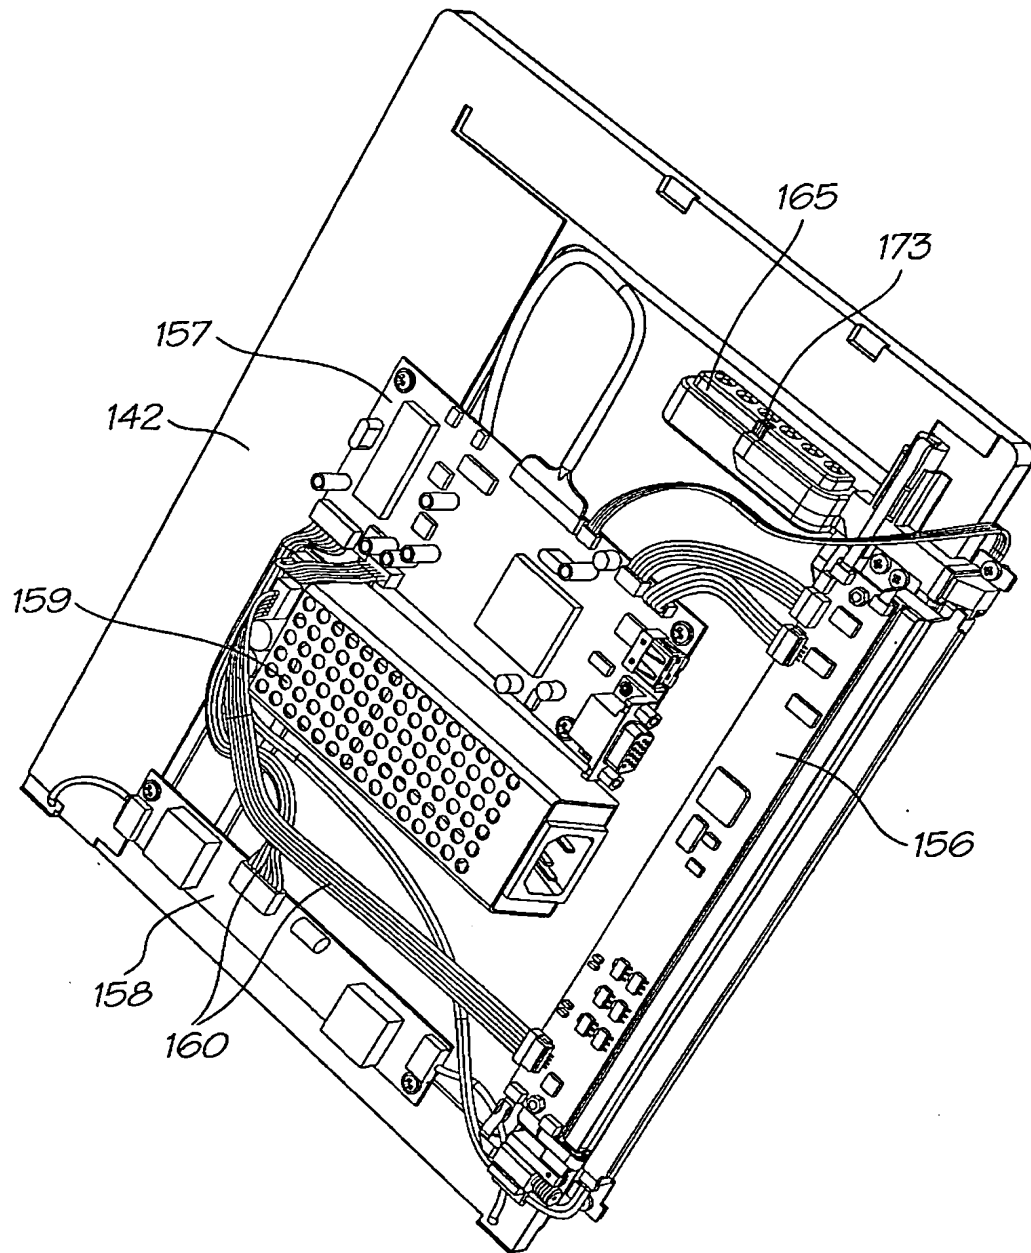


FIG. 26

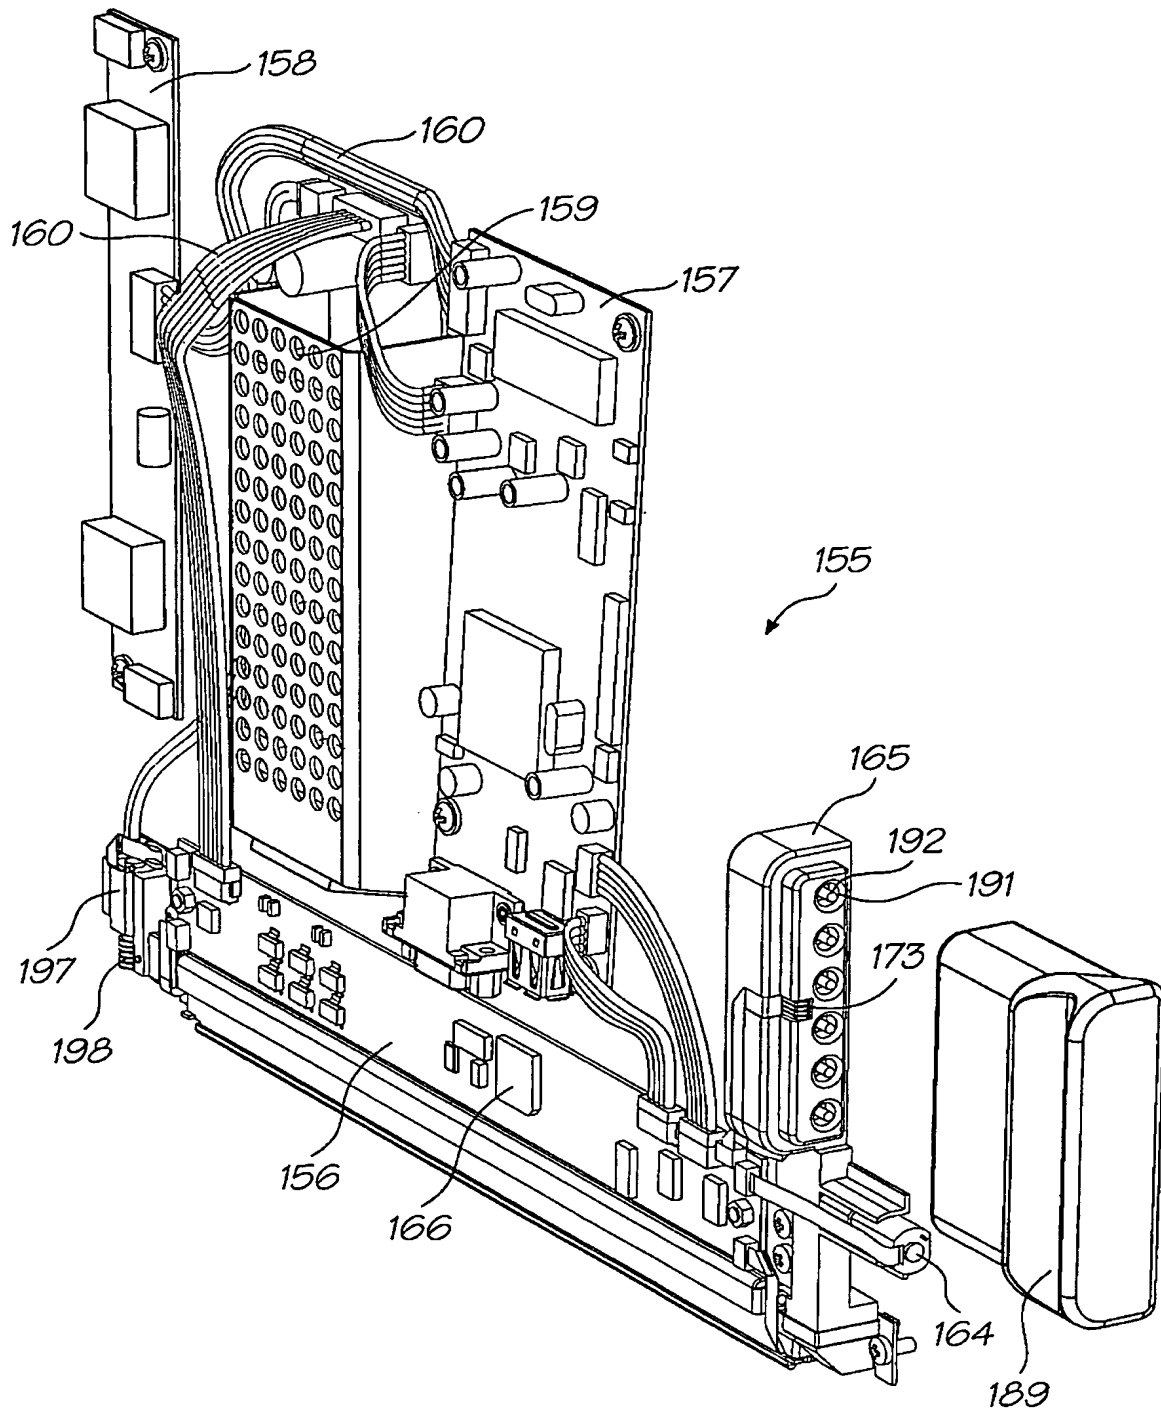


FIG. 27

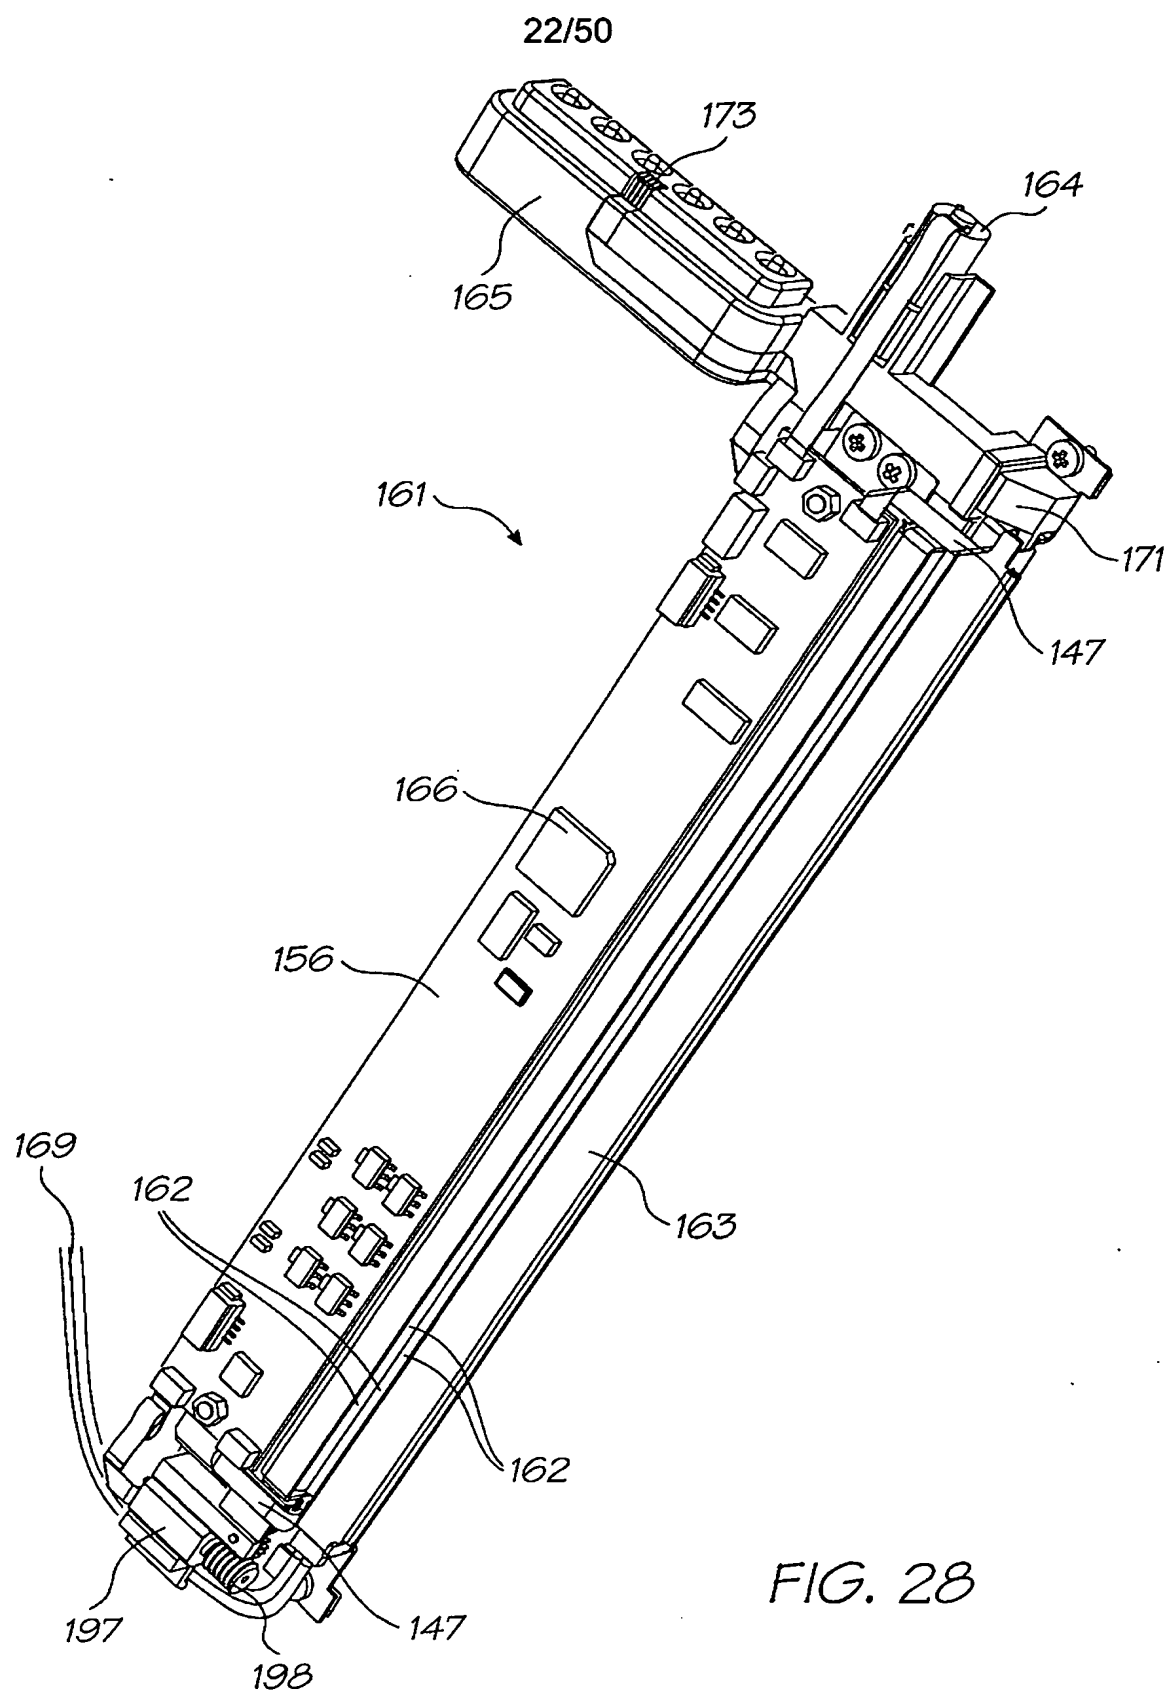


FIG. 28

23/50

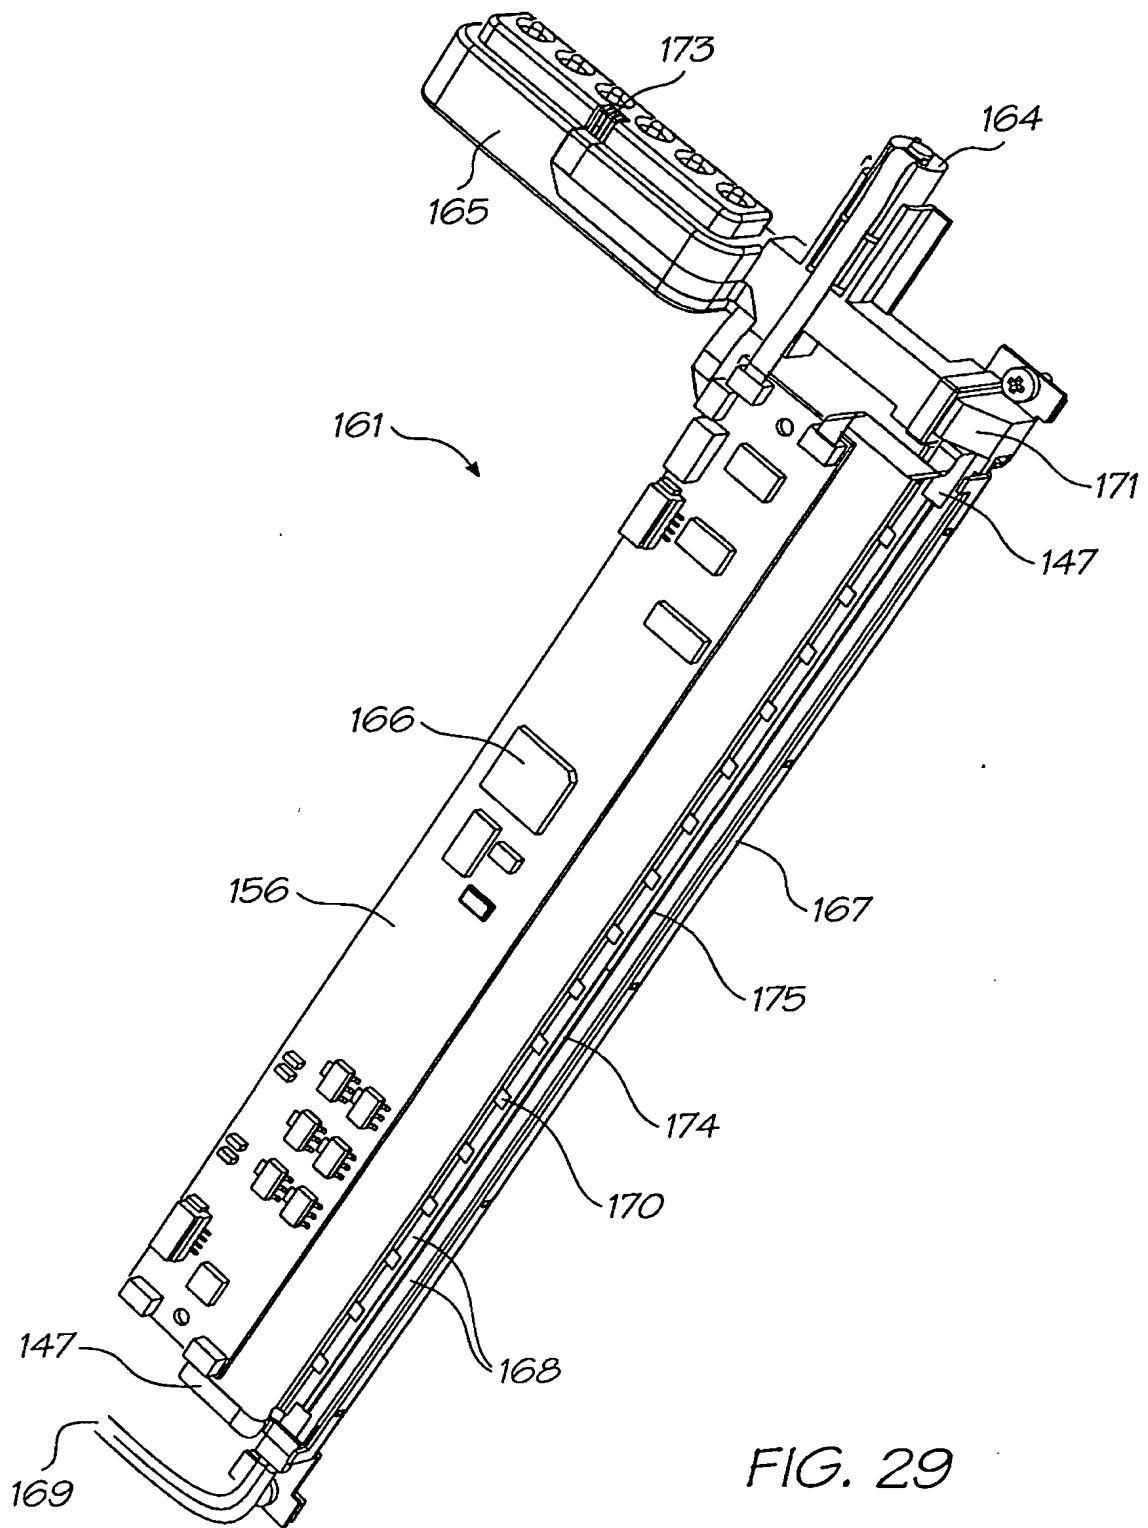


FIG. 29



24/50

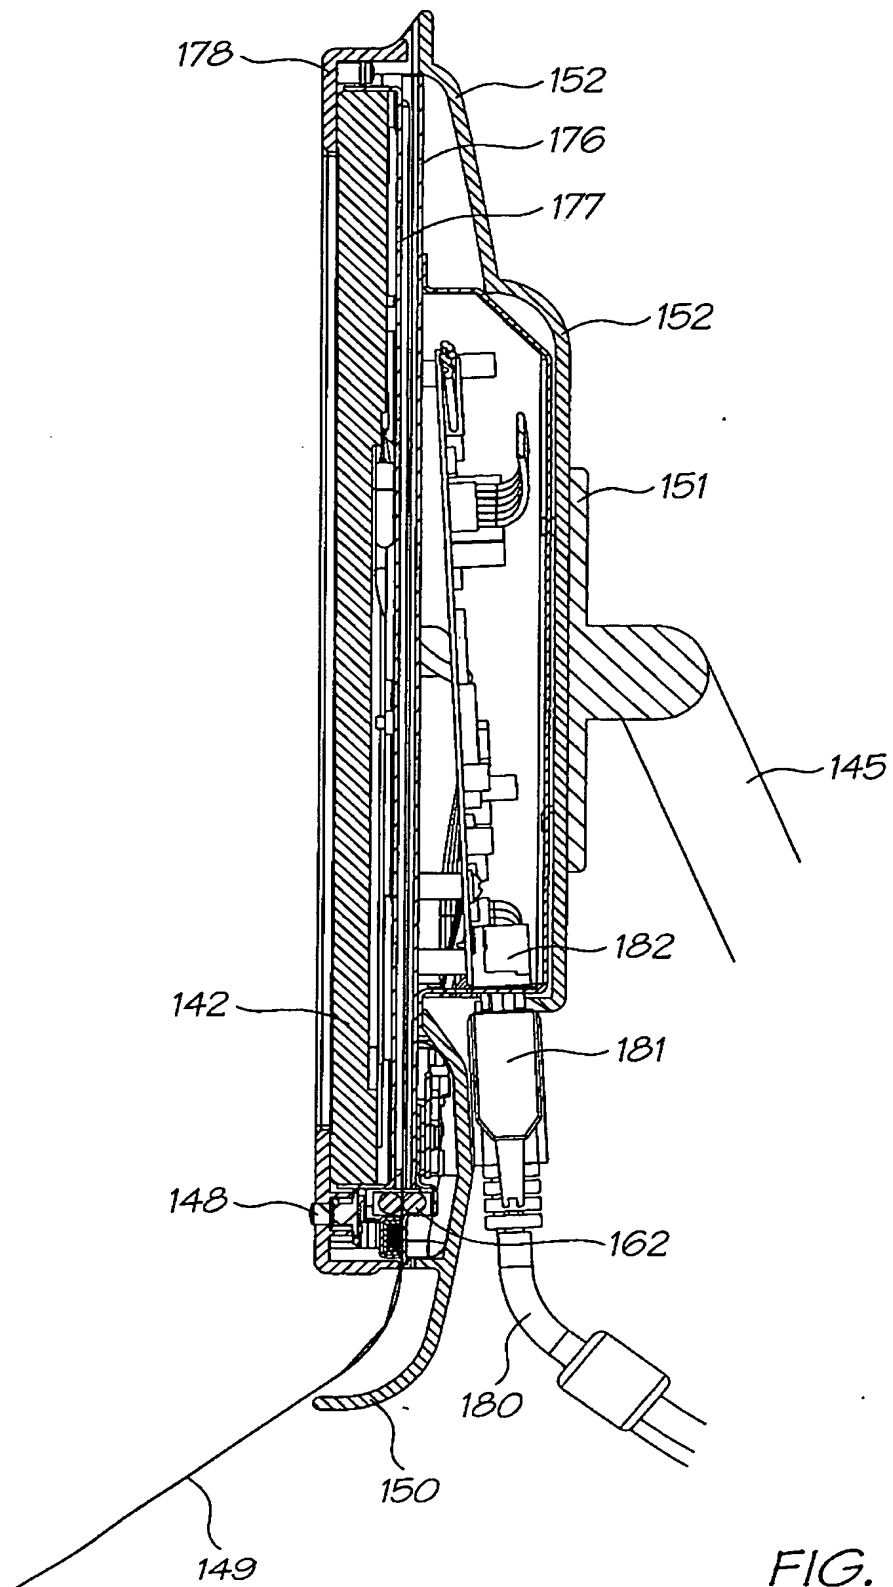


FIG. 30

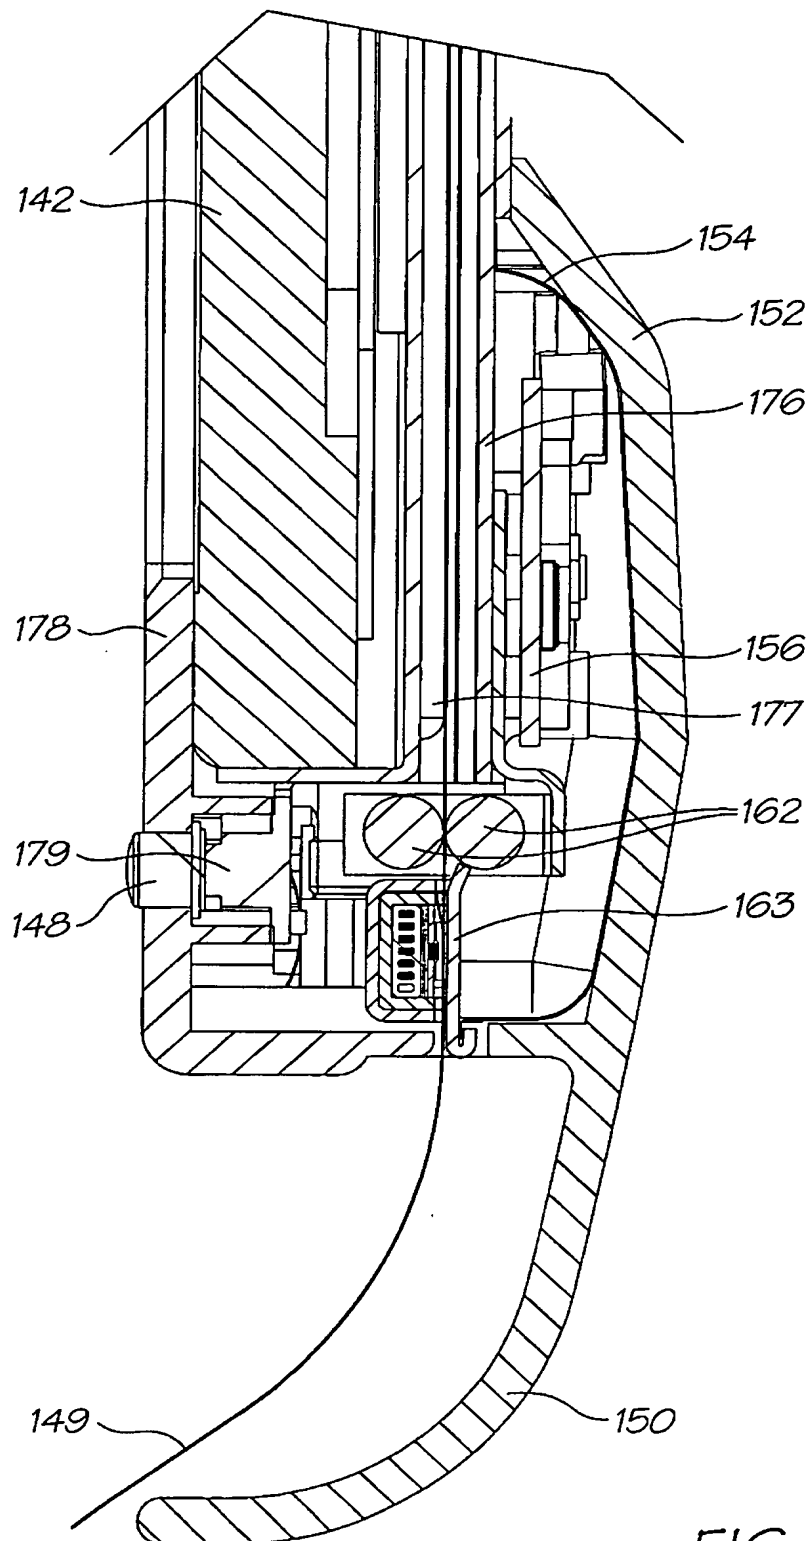


FIG. 31

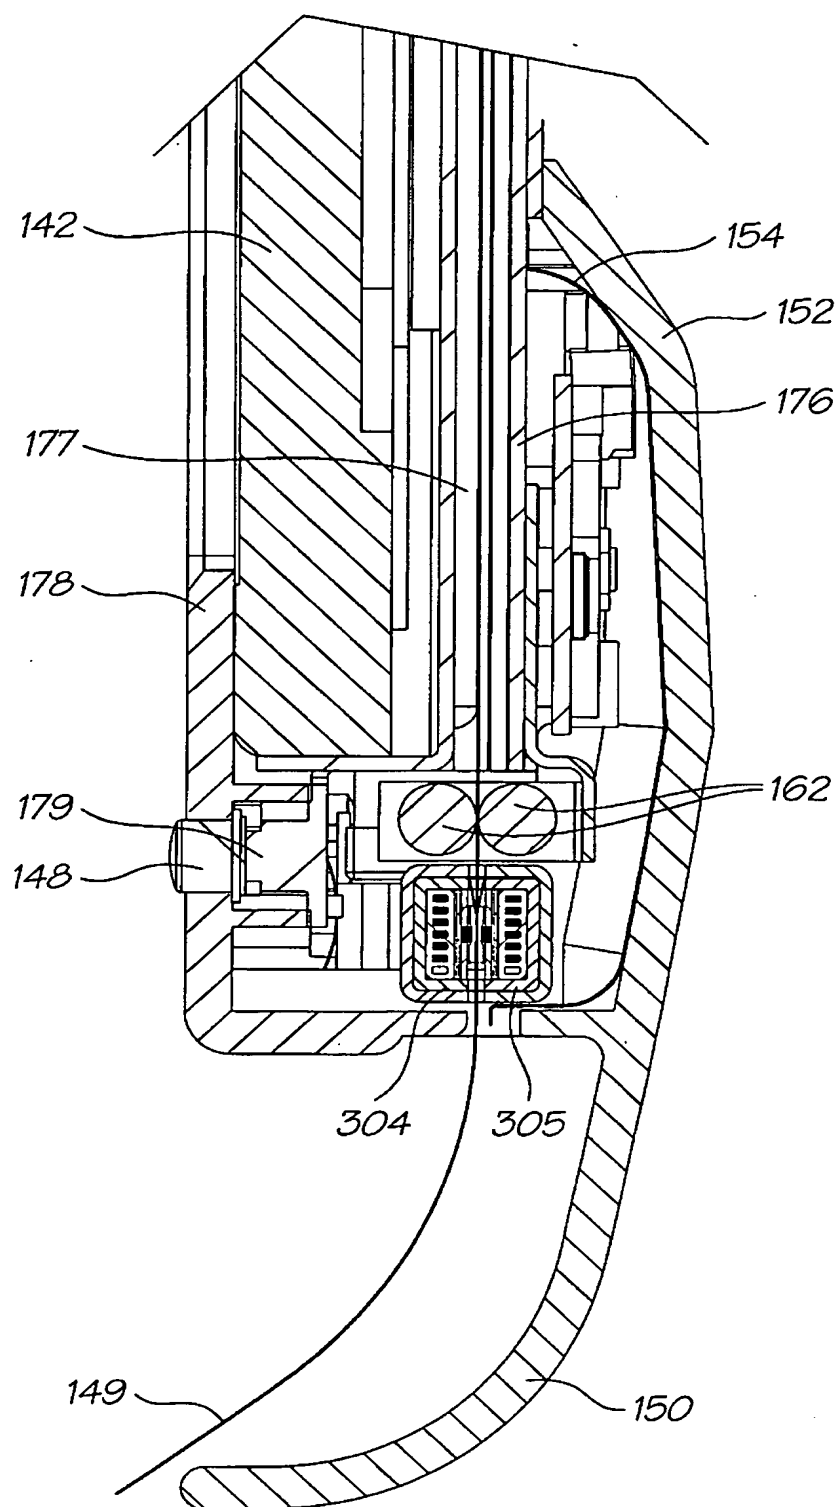


FIG. 32

27/50

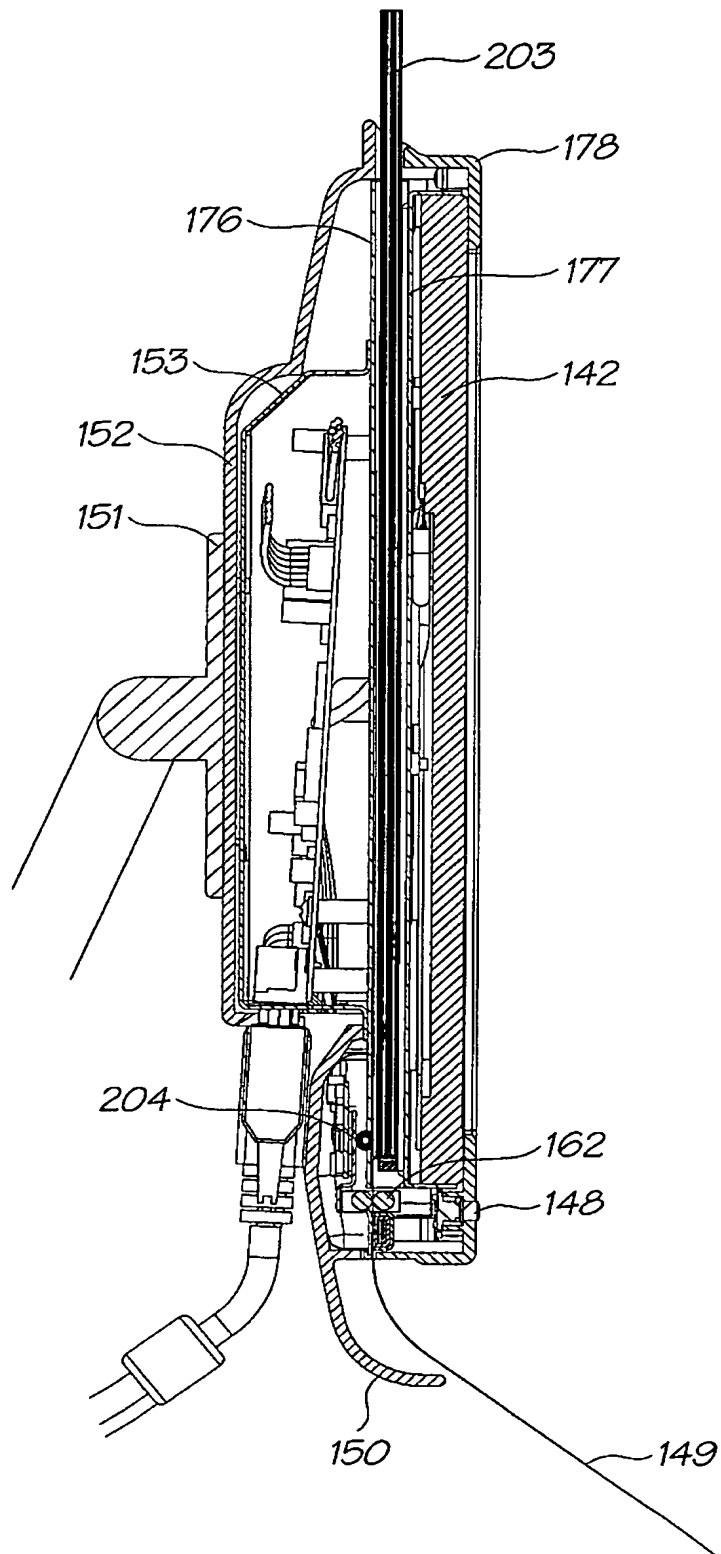


FIG. 33

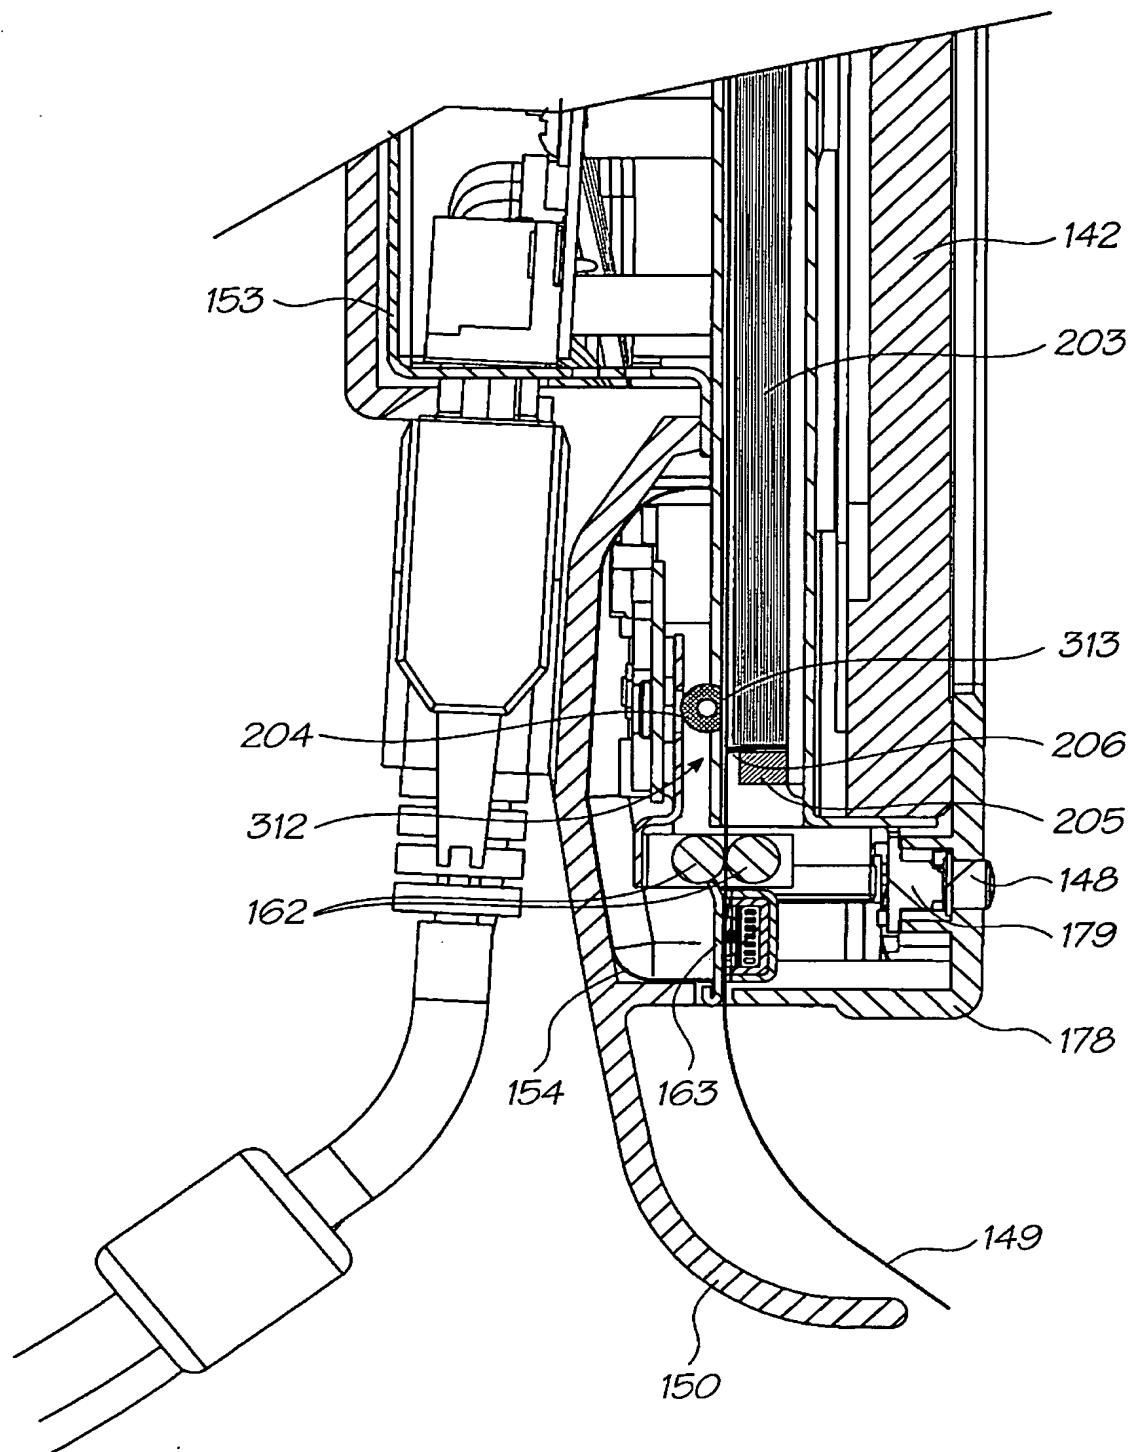


FIG. 34

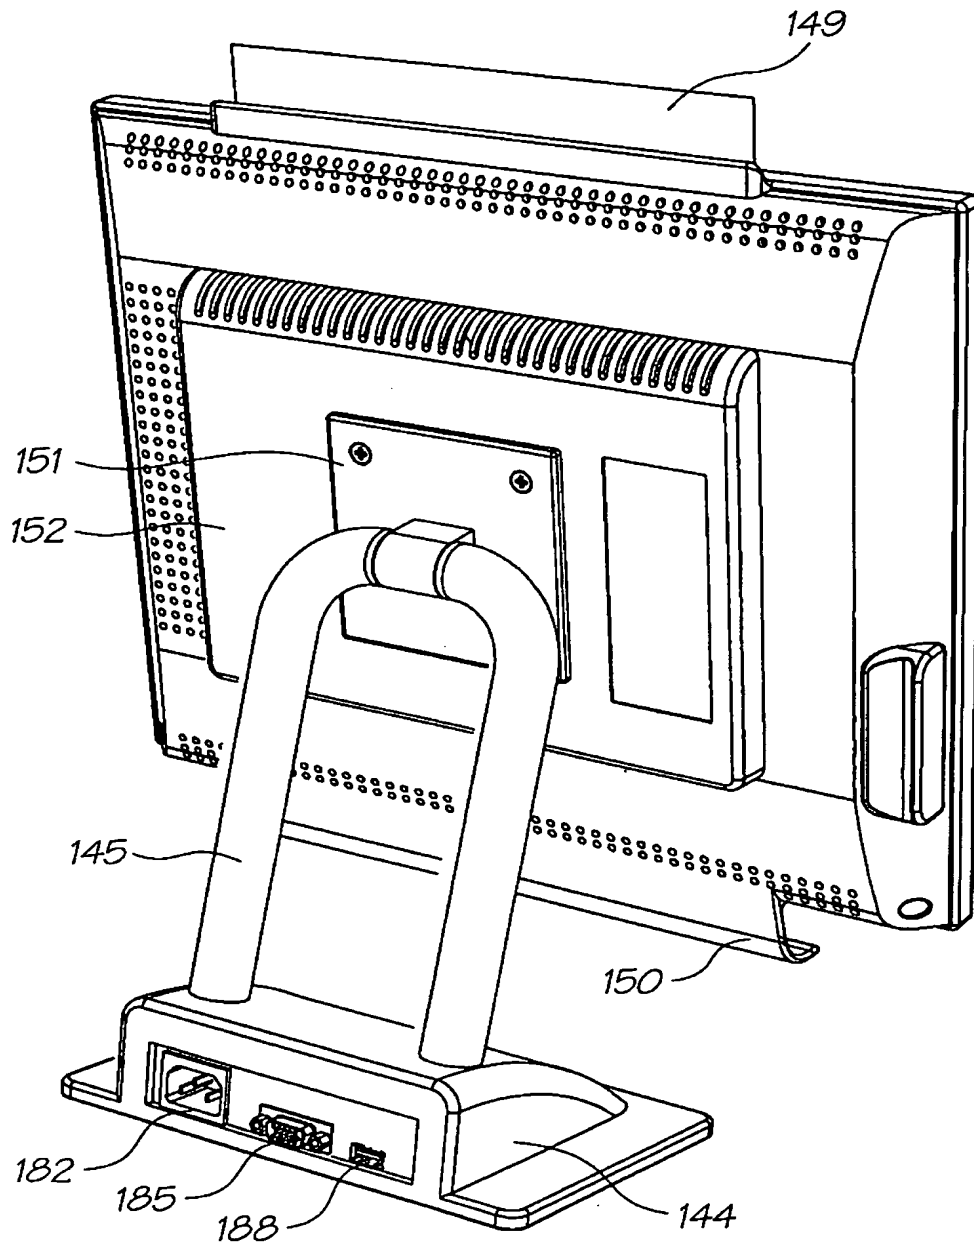


FIG. 35

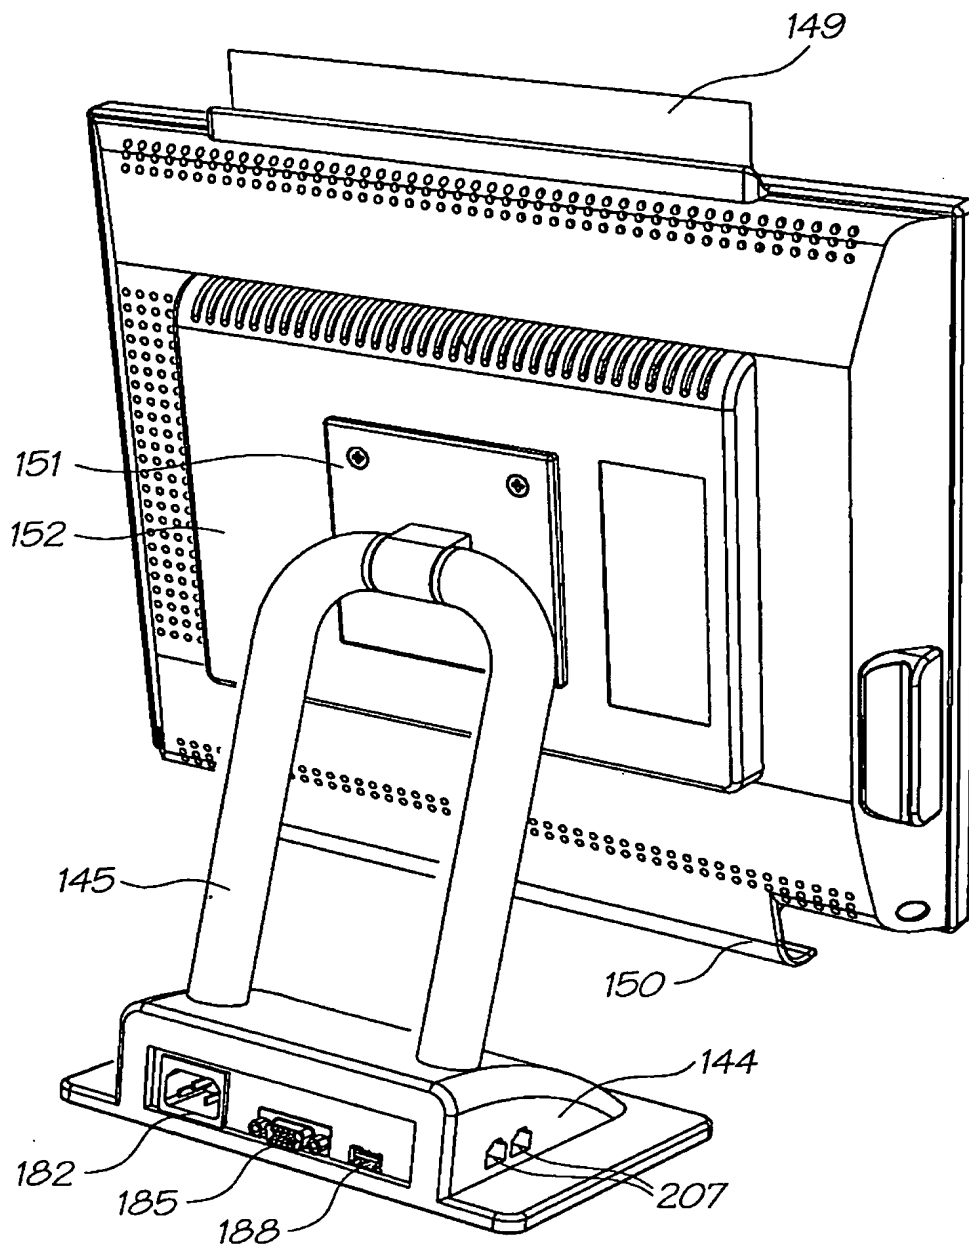


FIG. 36

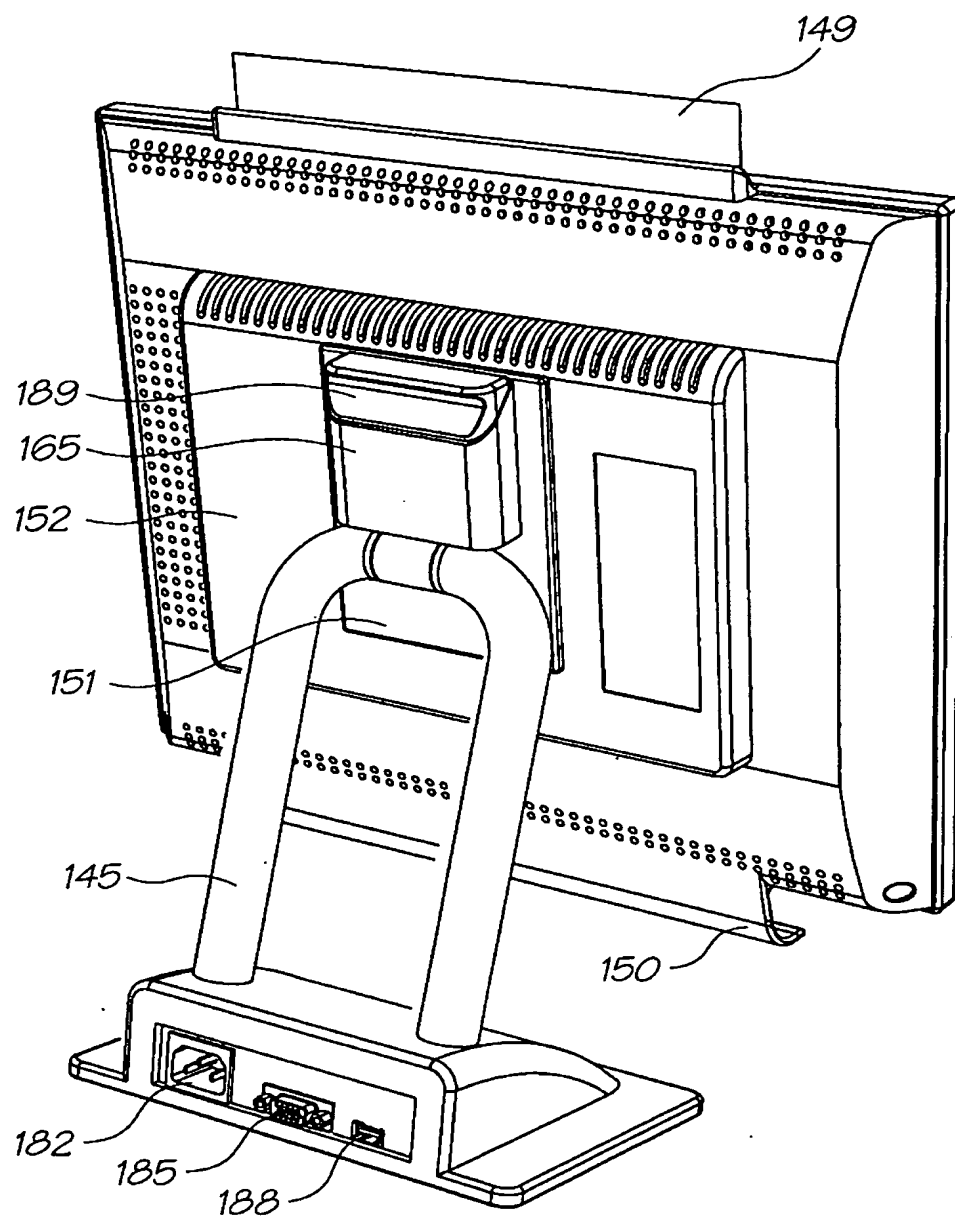


FIG. 37



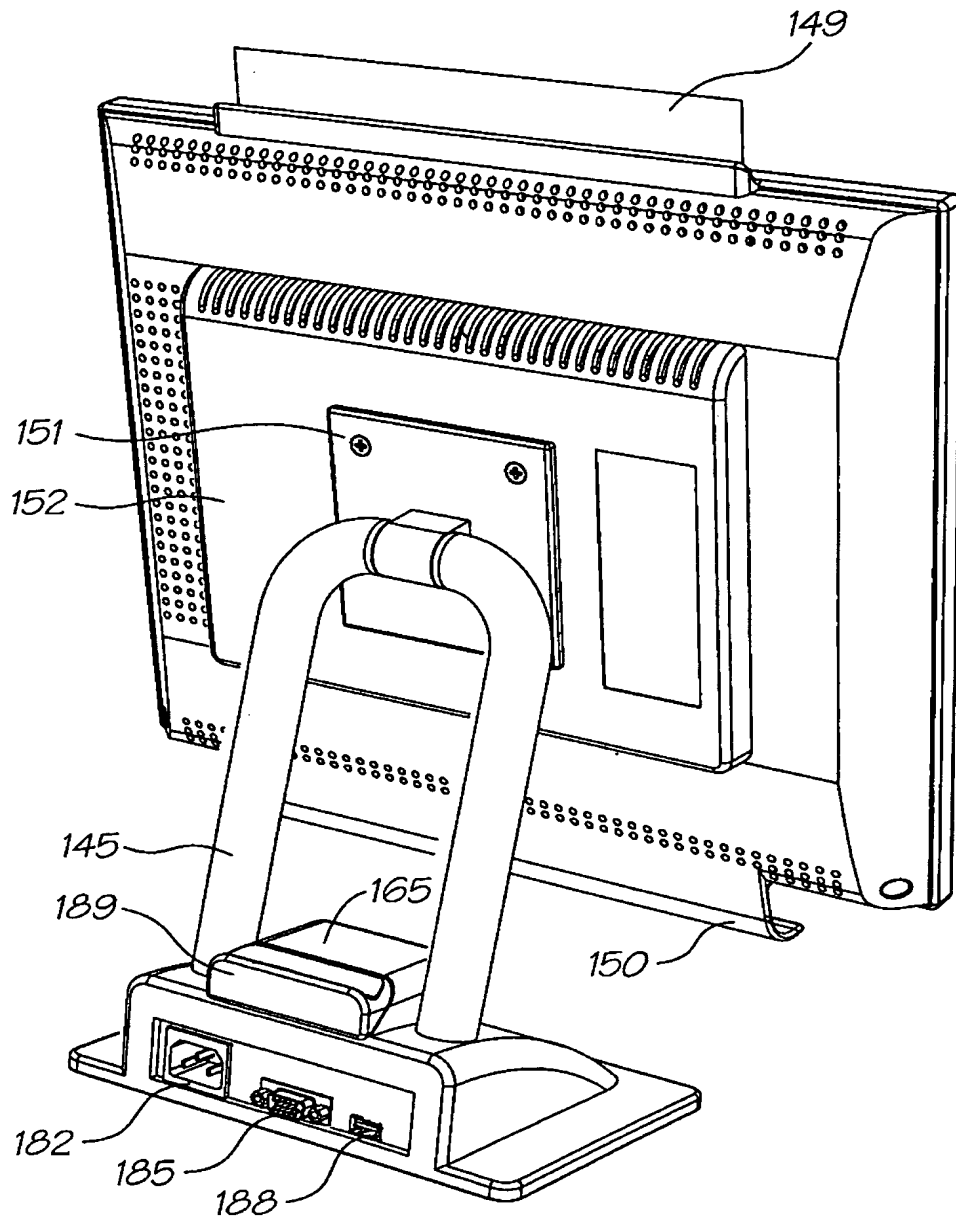


FIG. 38

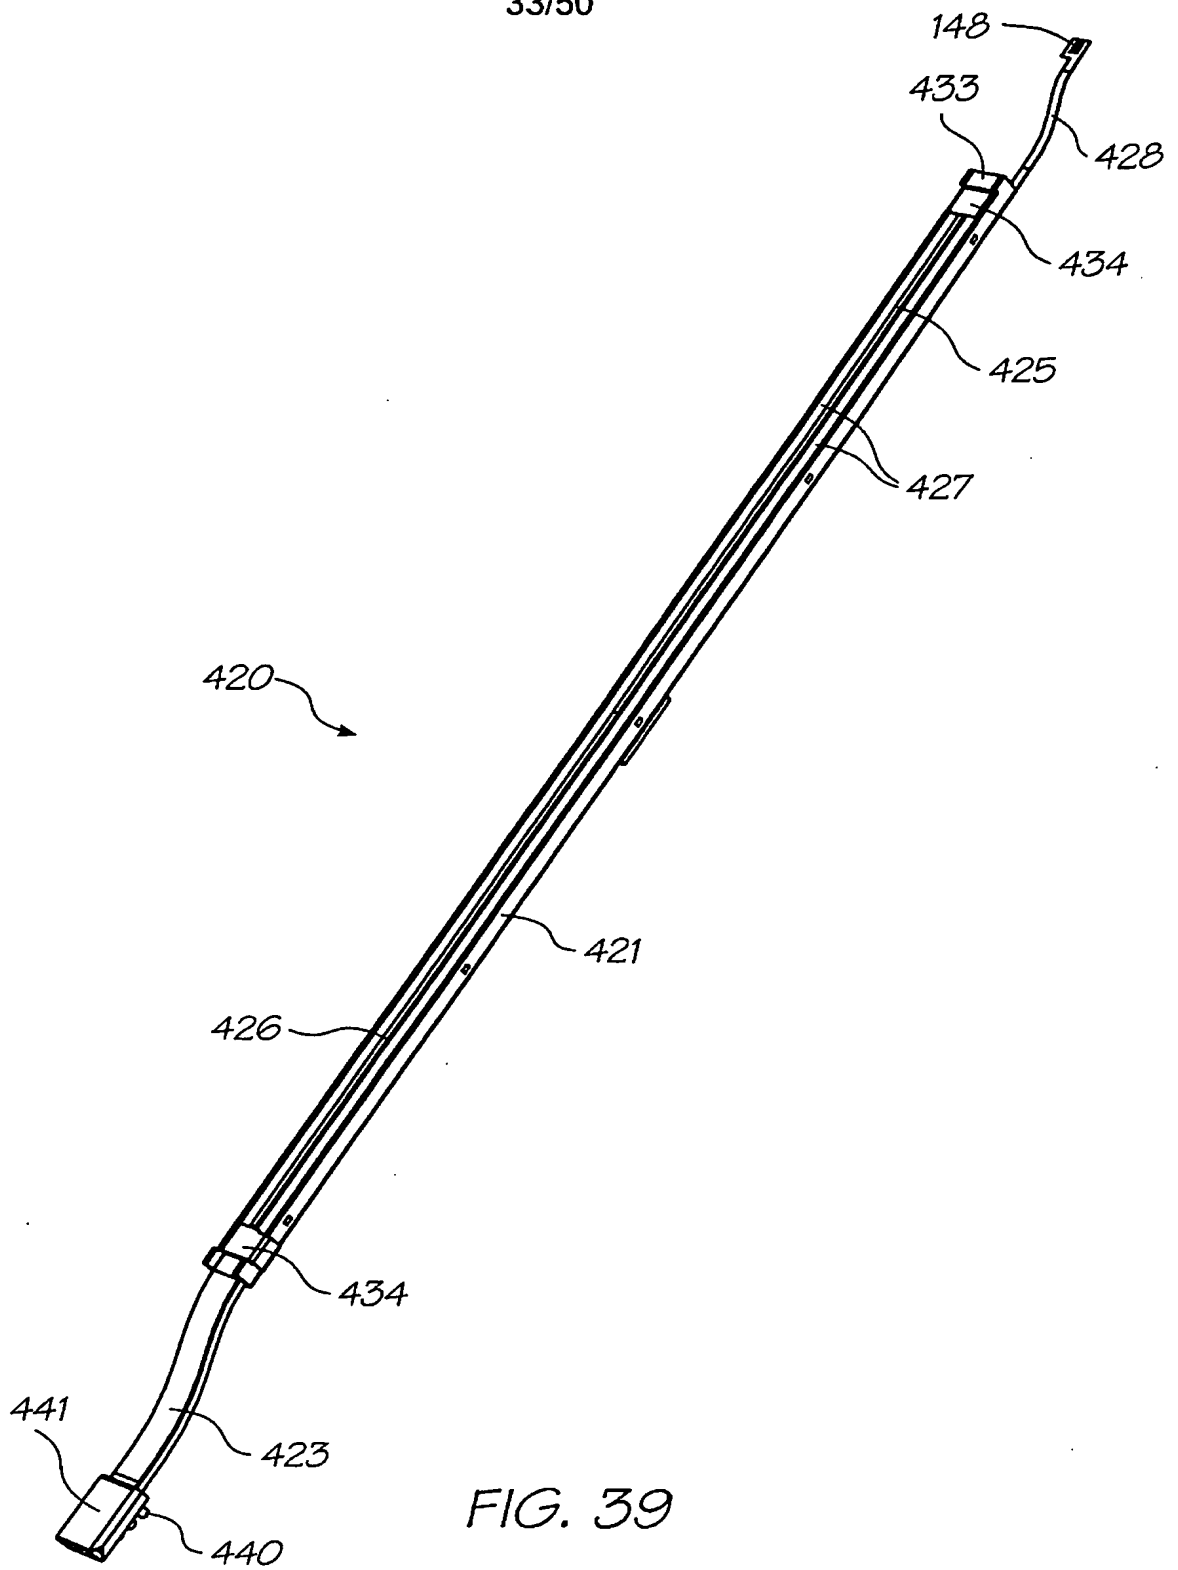


FIG. 39

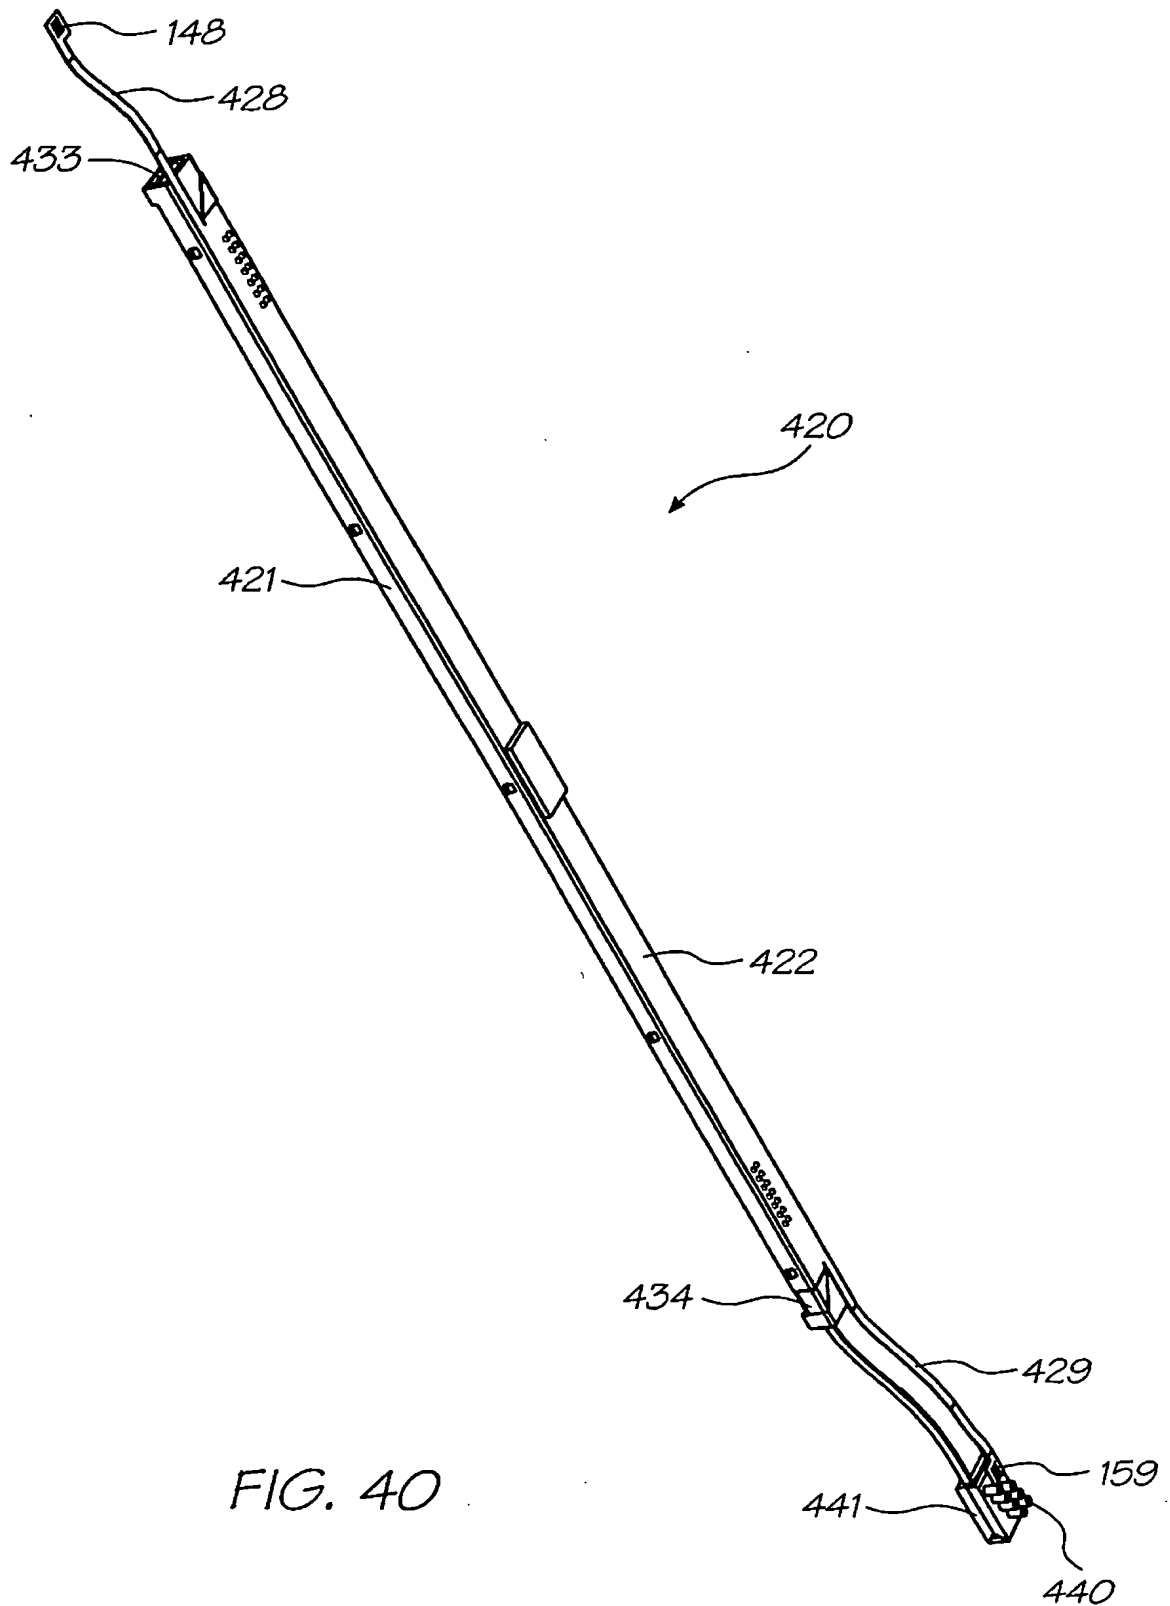


FIG. 40

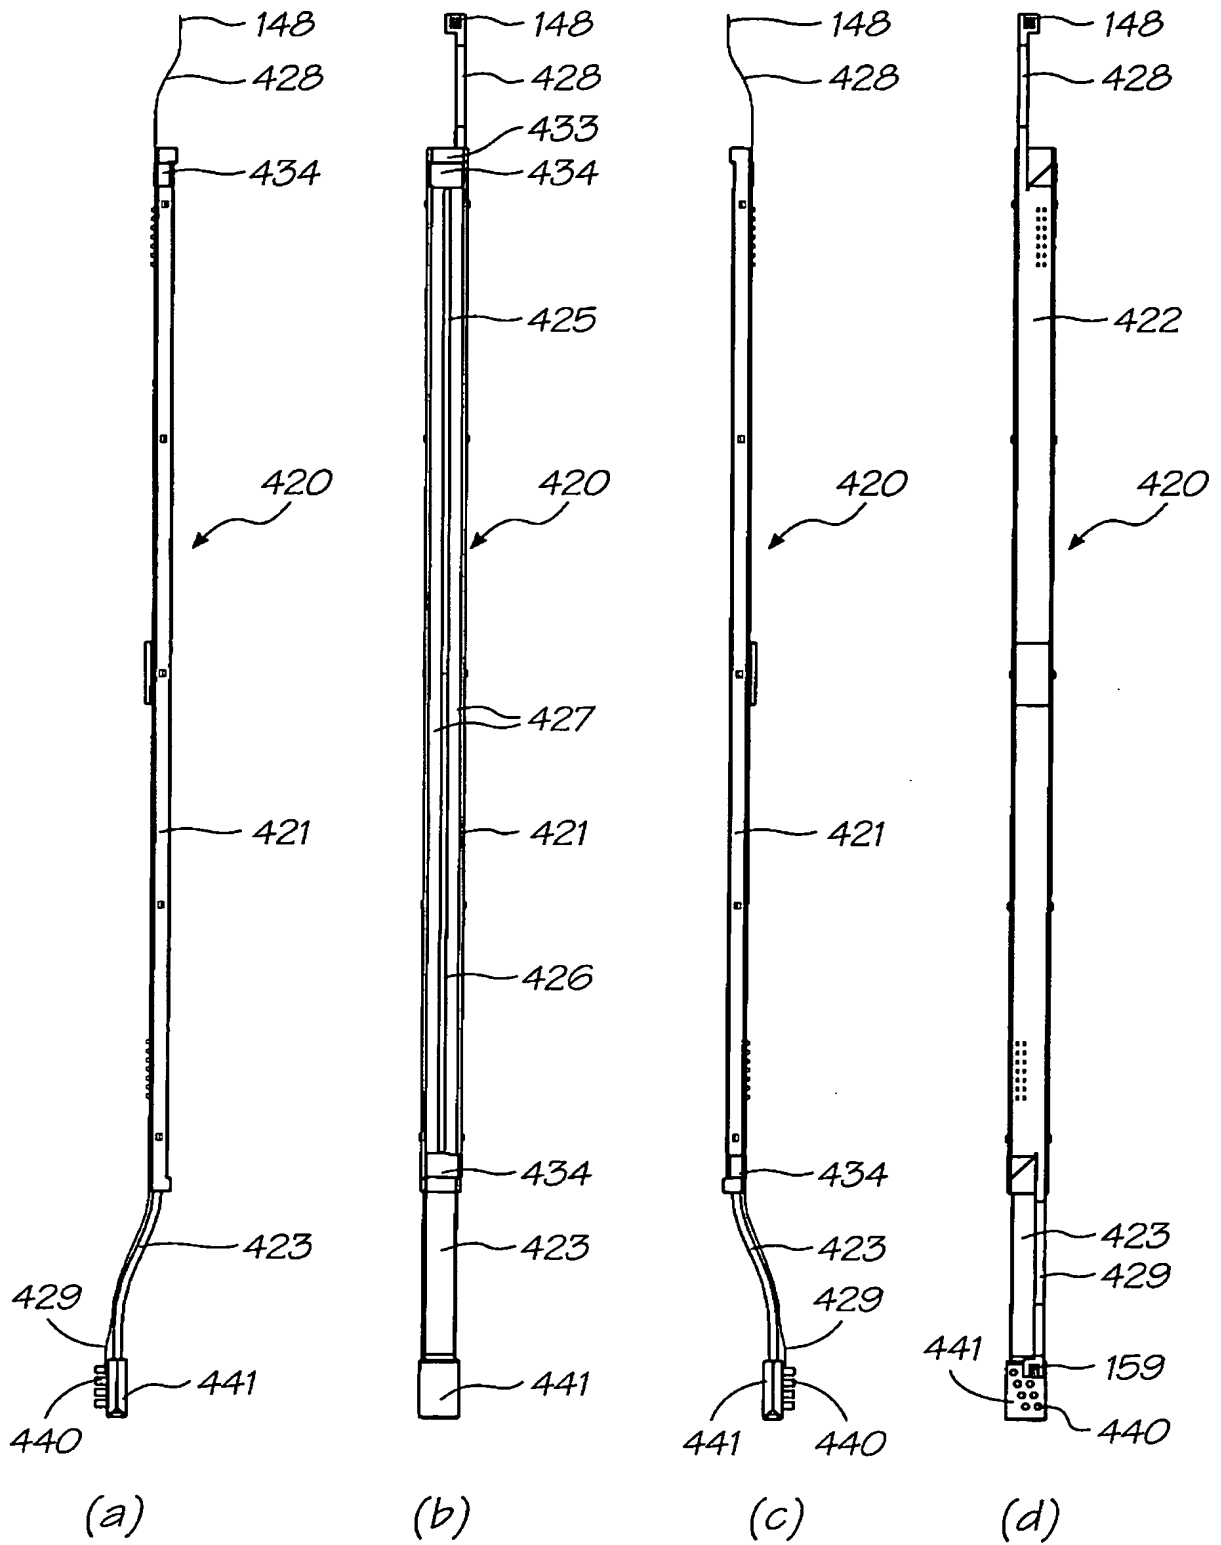


FIG. 41

36/50

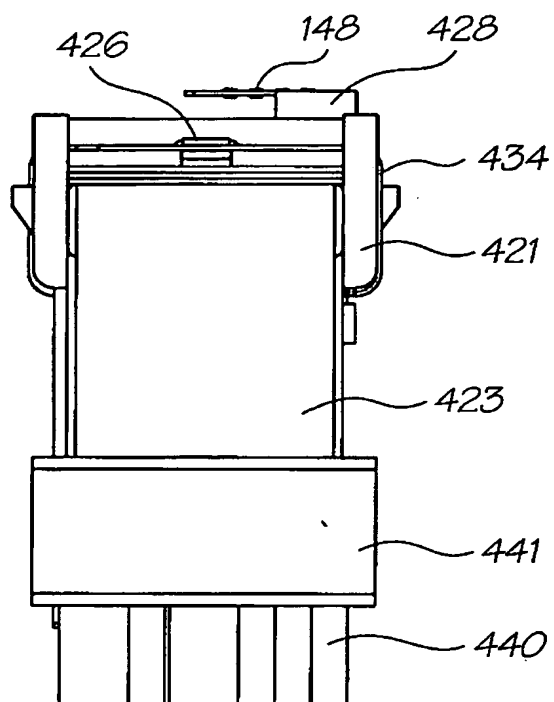


FIG. 42

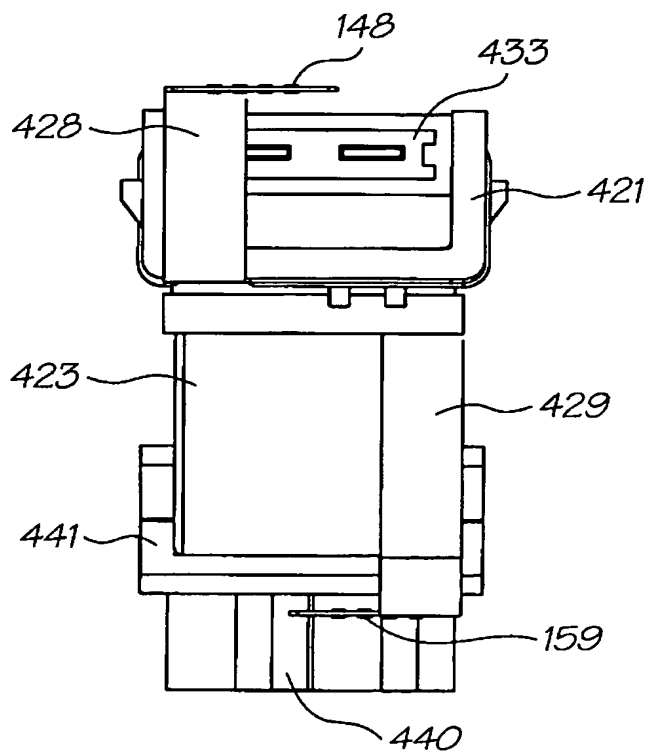


FIG. 43

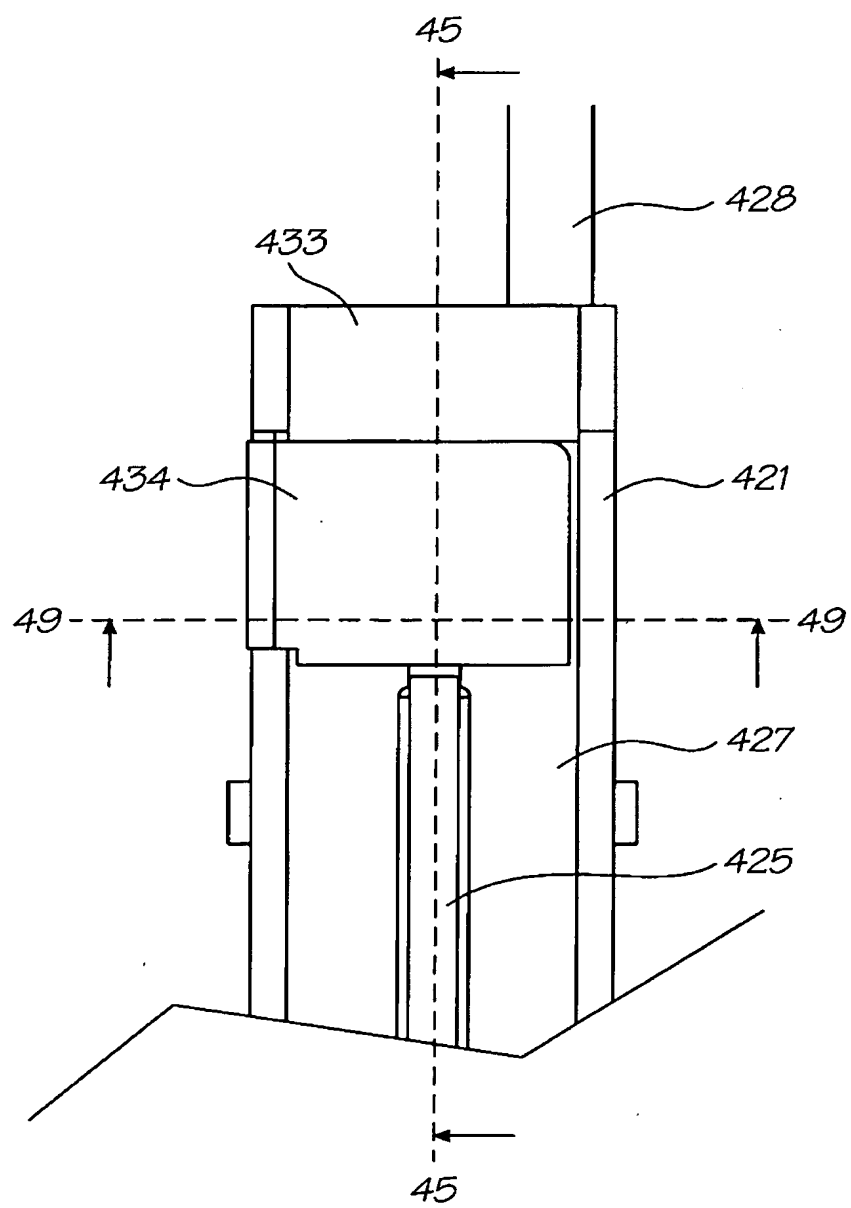


FIG. 44

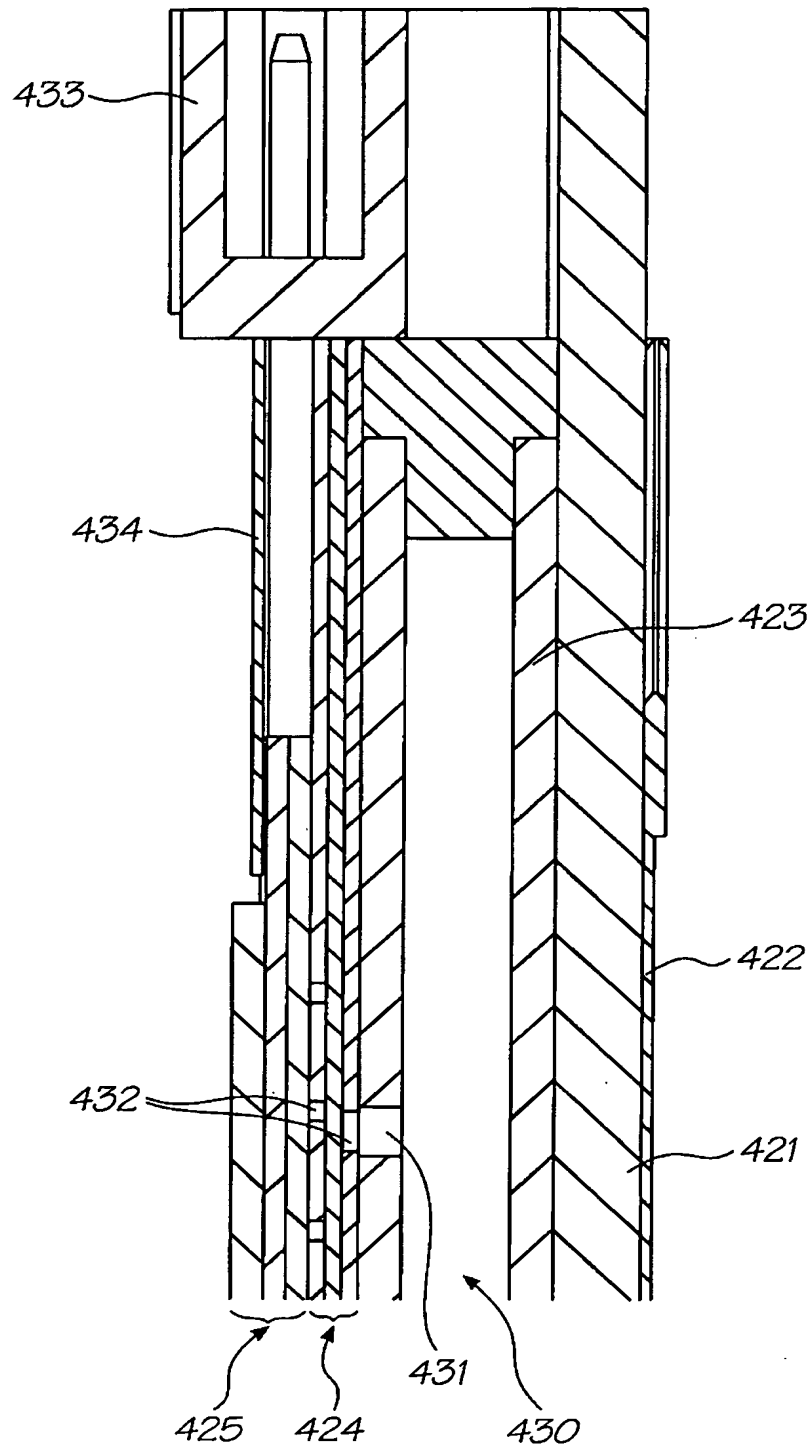


FIG. 45

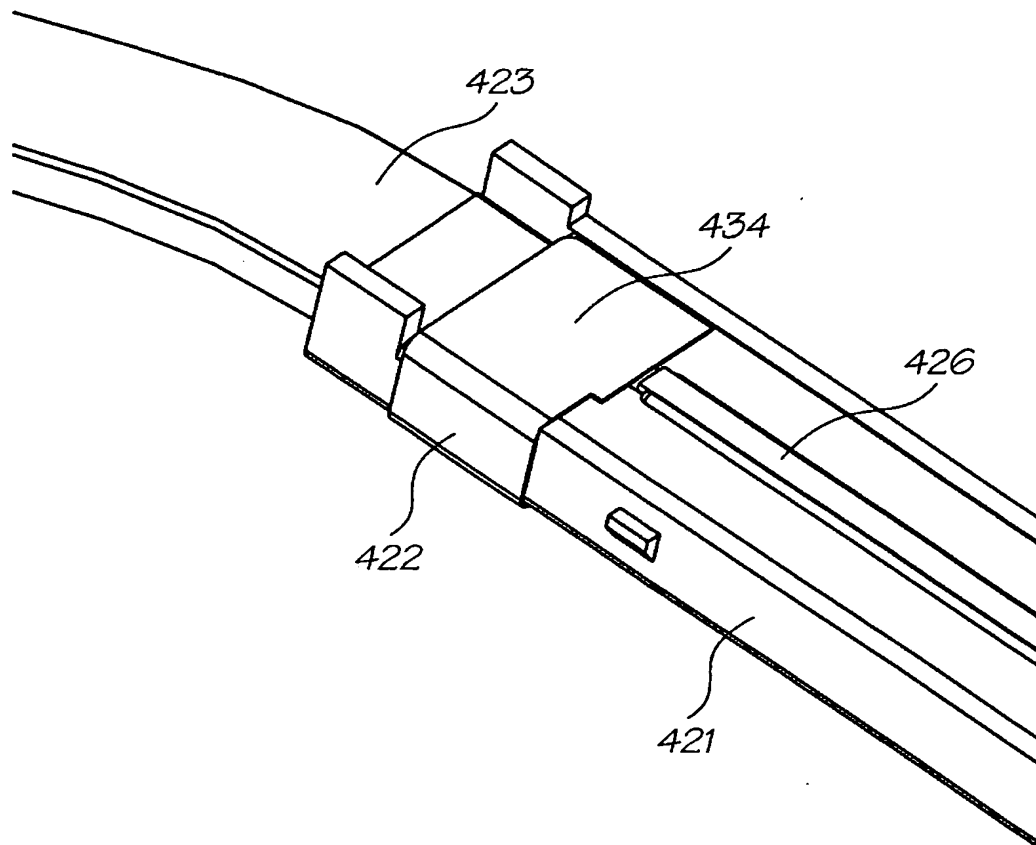


FIG. 46



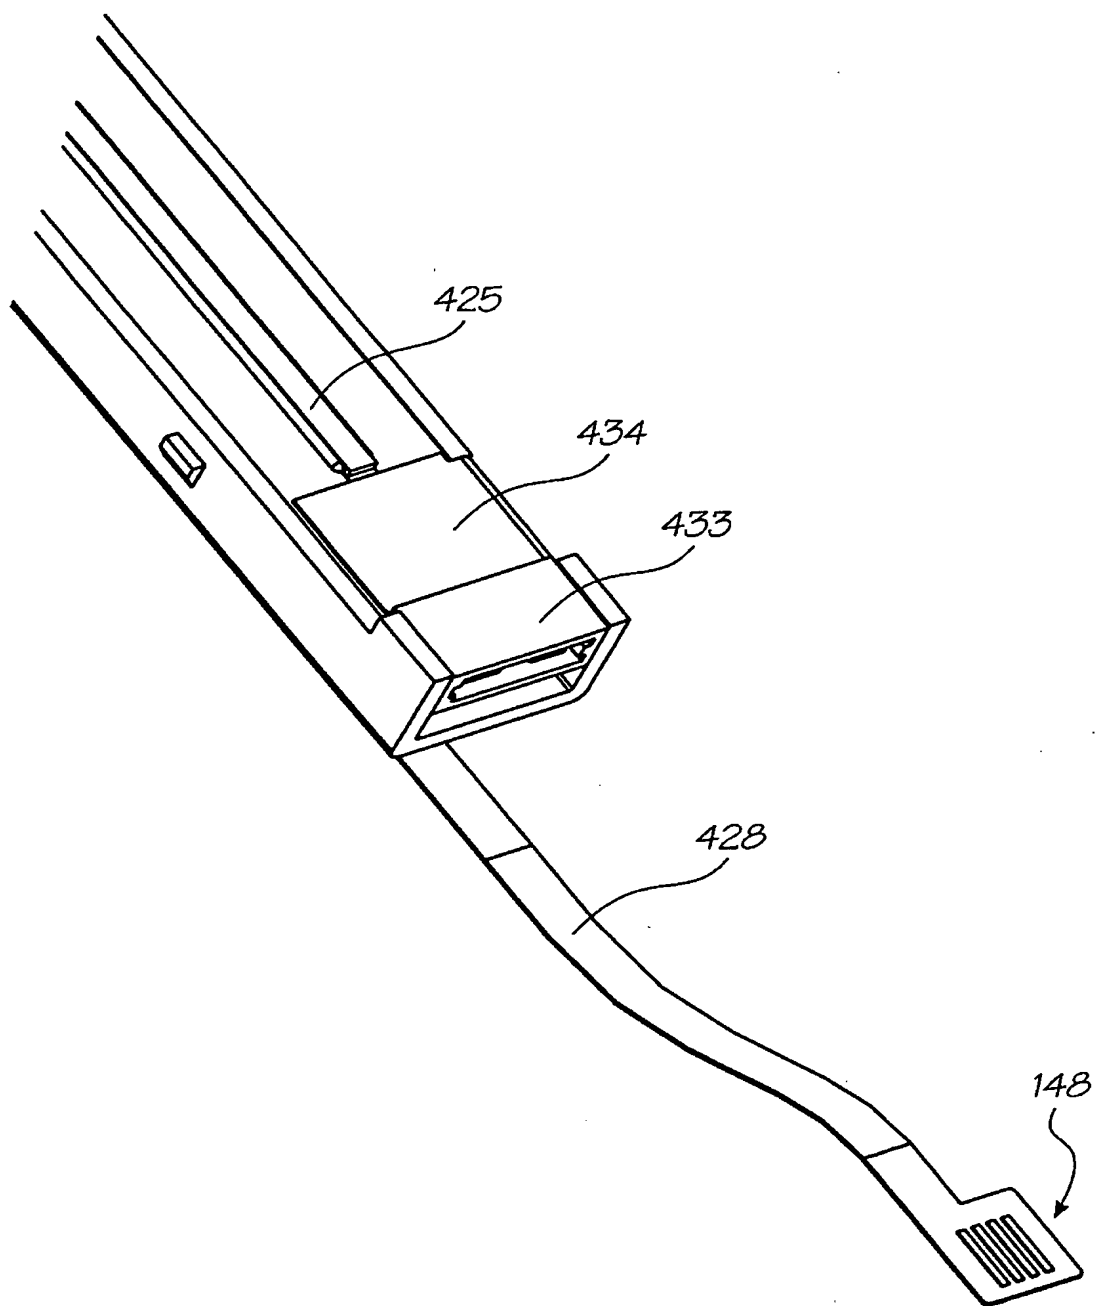


FIG. 47

41/50

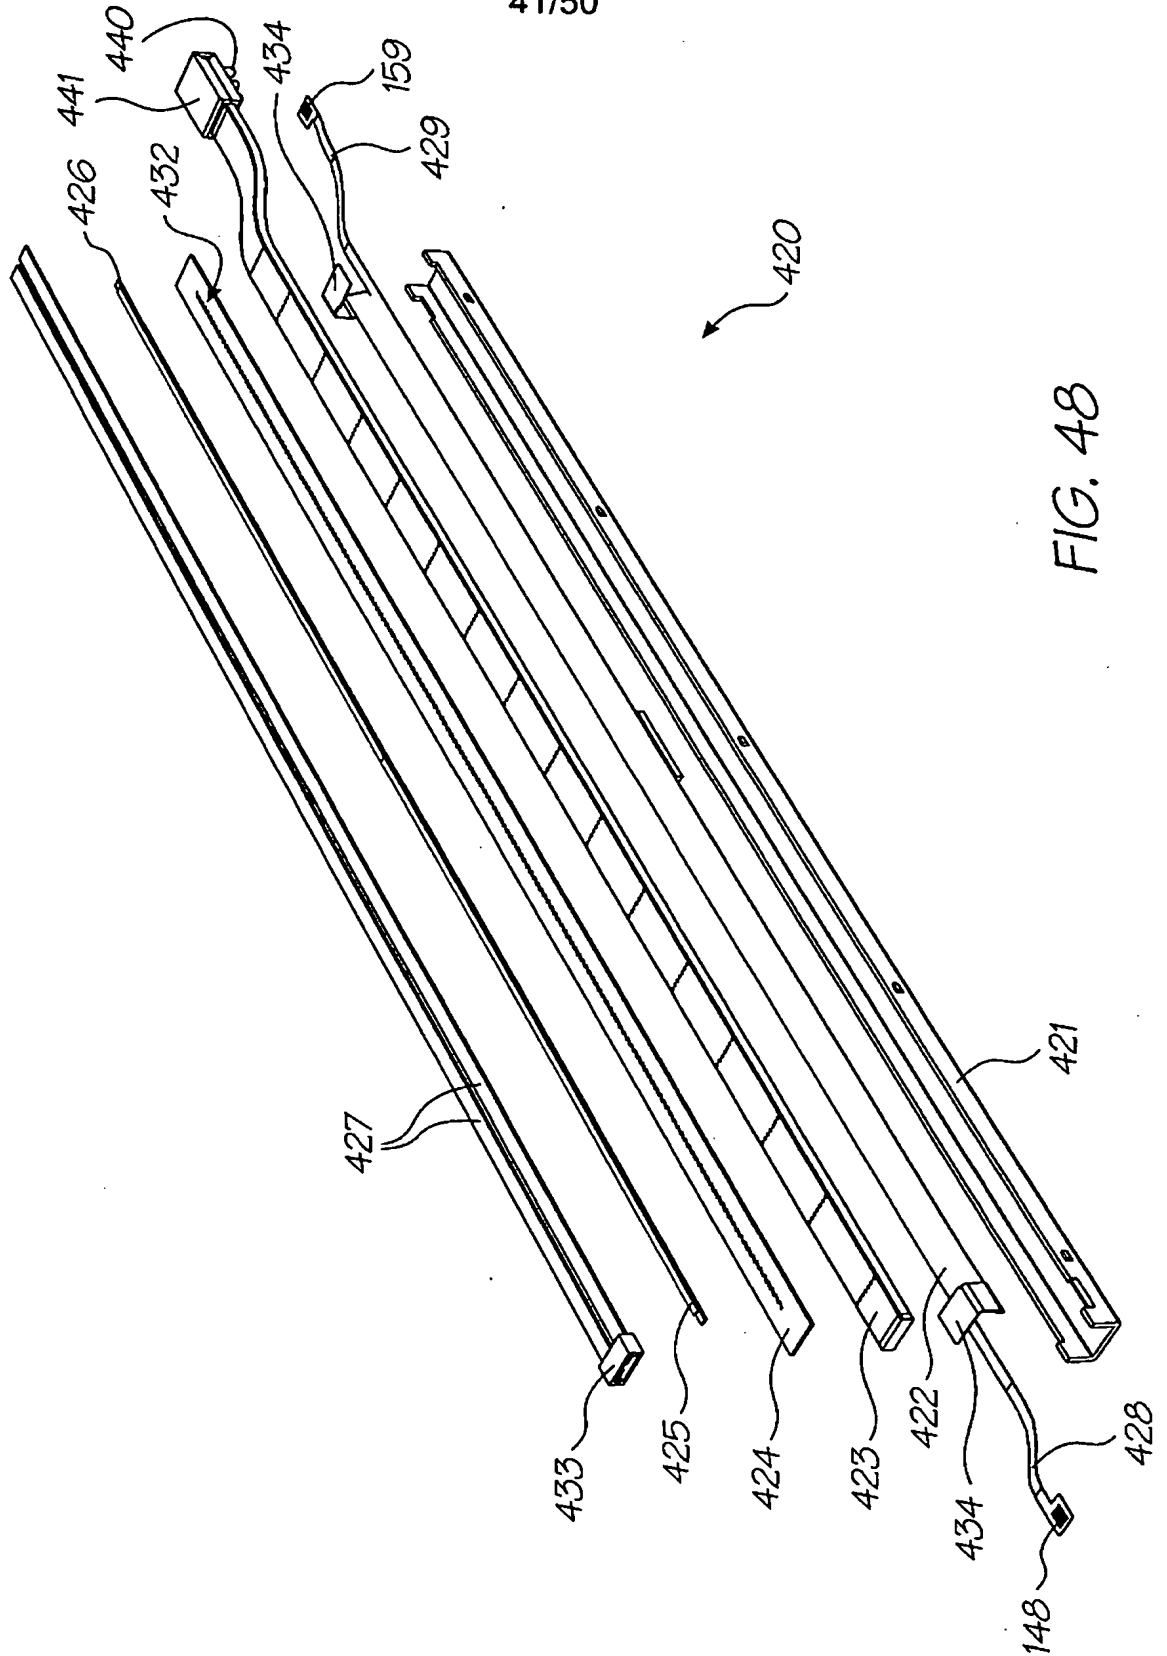


FIG. 48

42/50

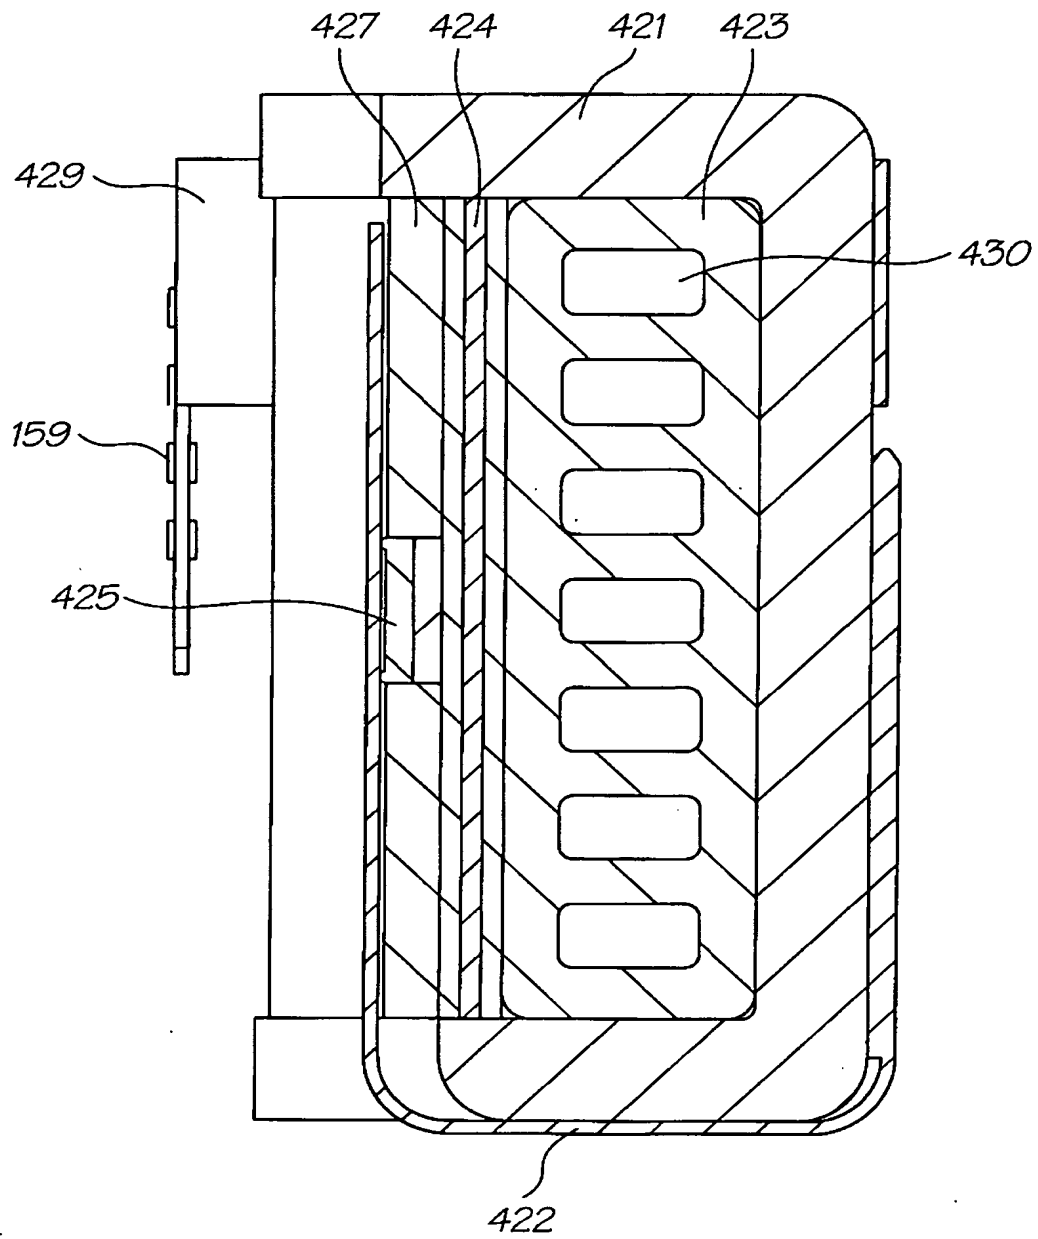


FIG. 49

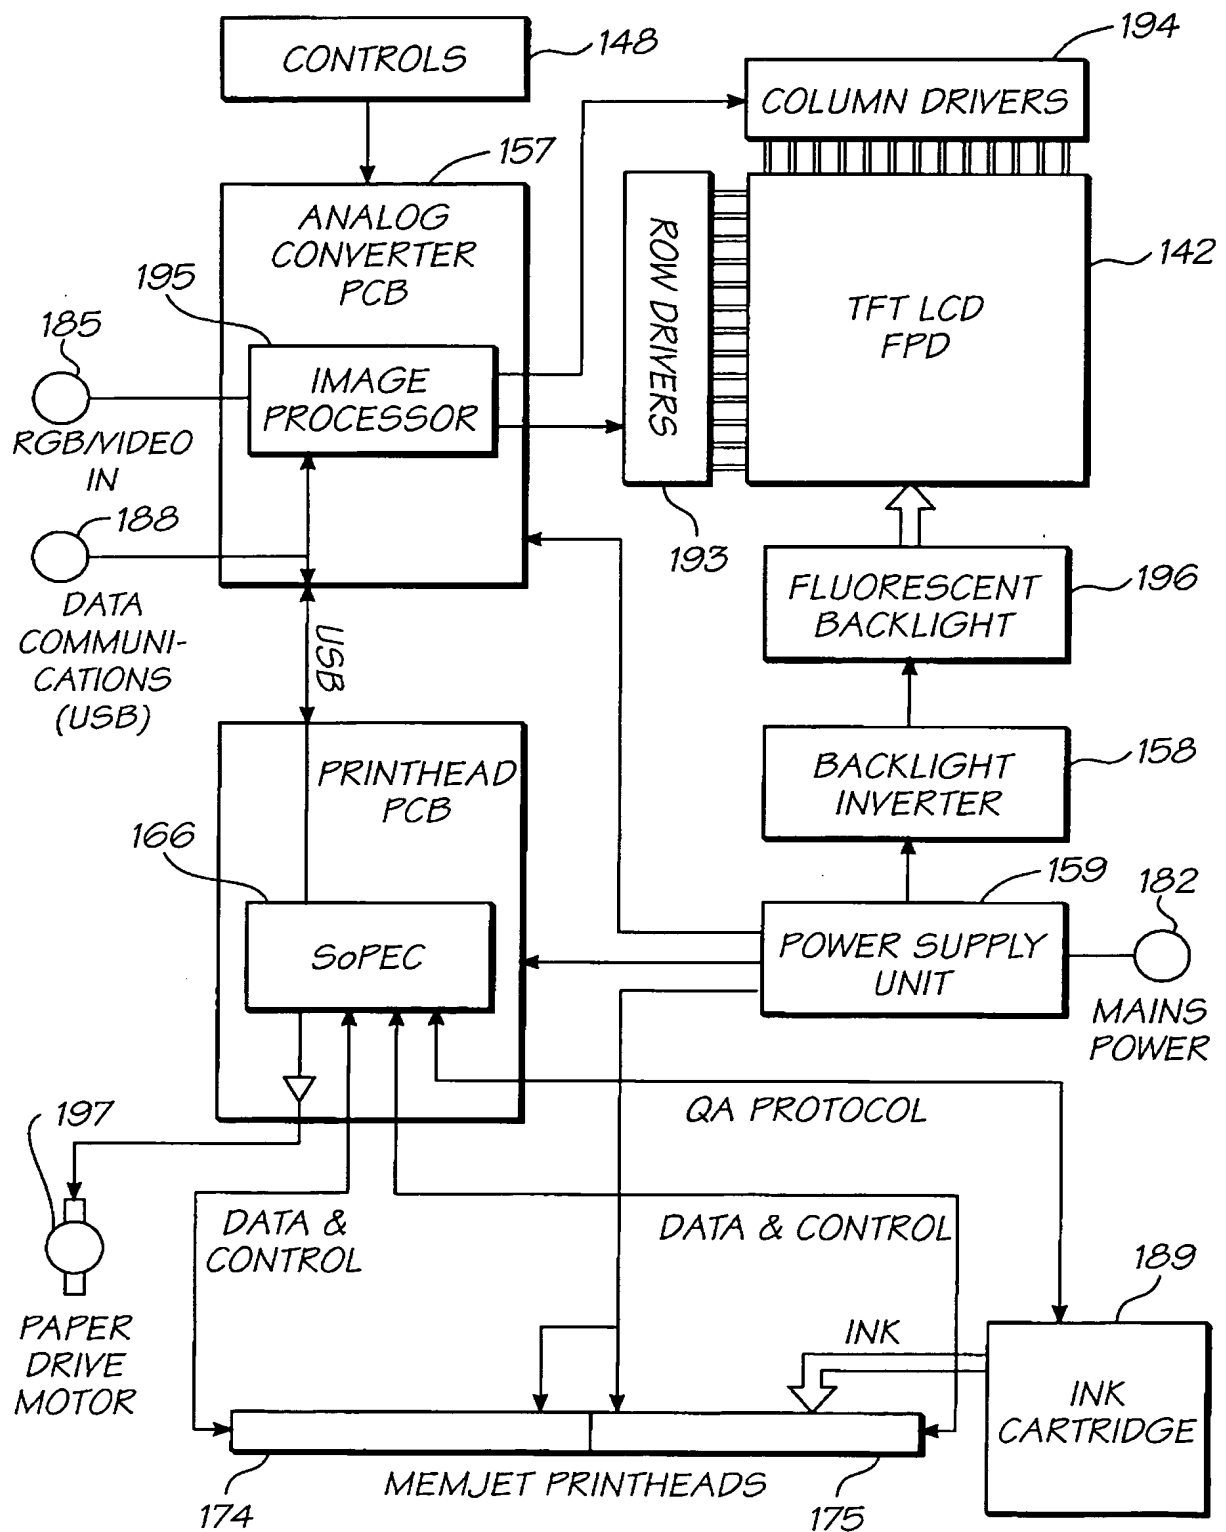


FIG. 50

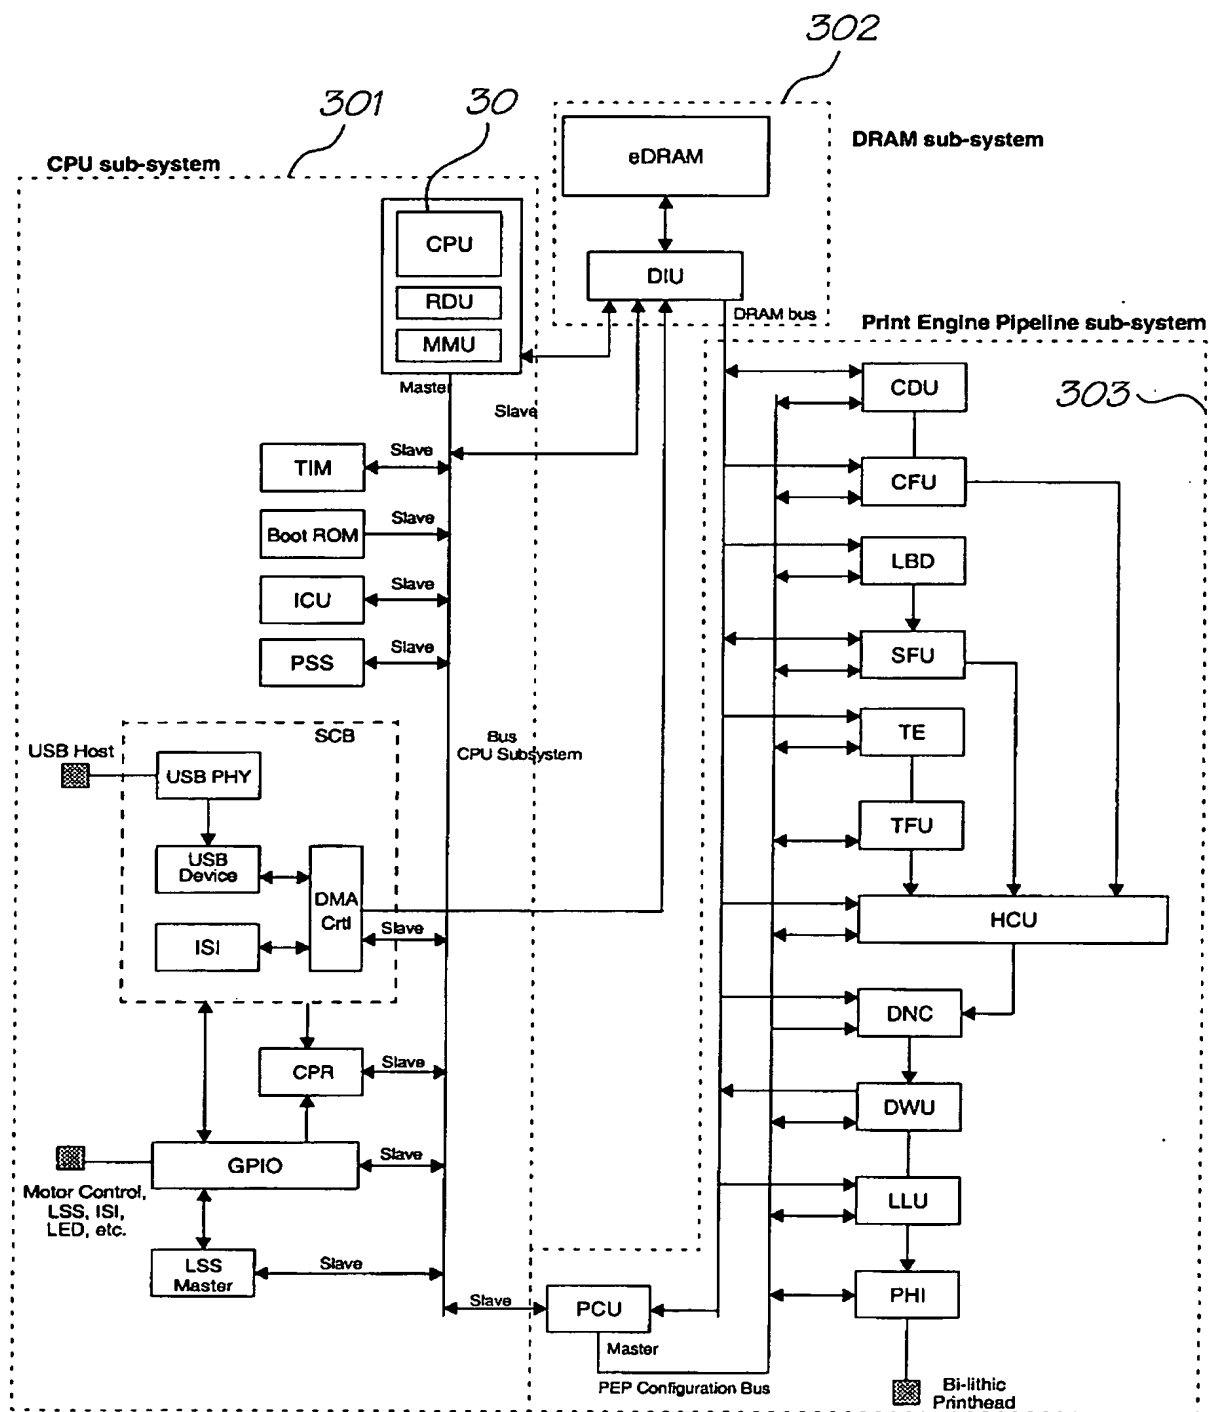


FIG. 51



45/50

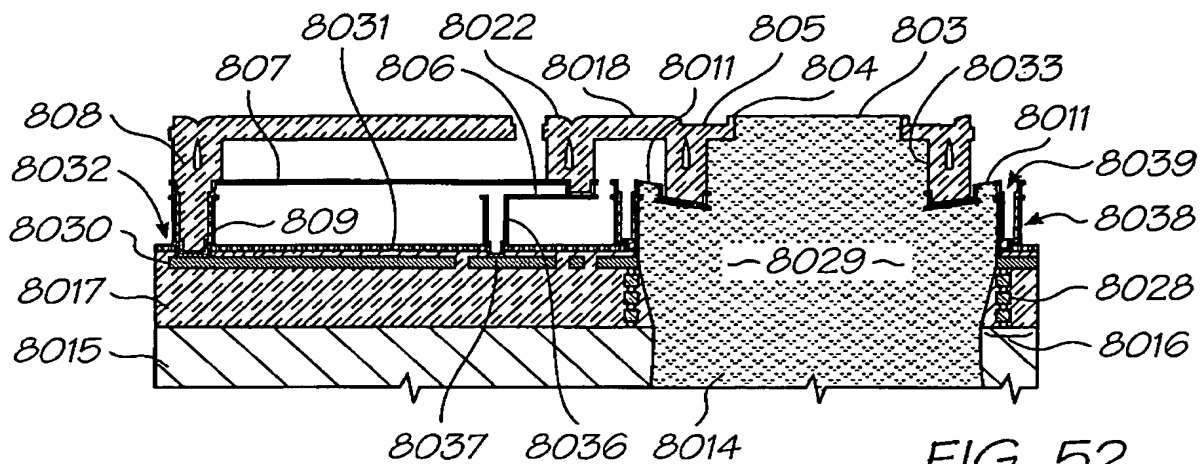


FIG. 52

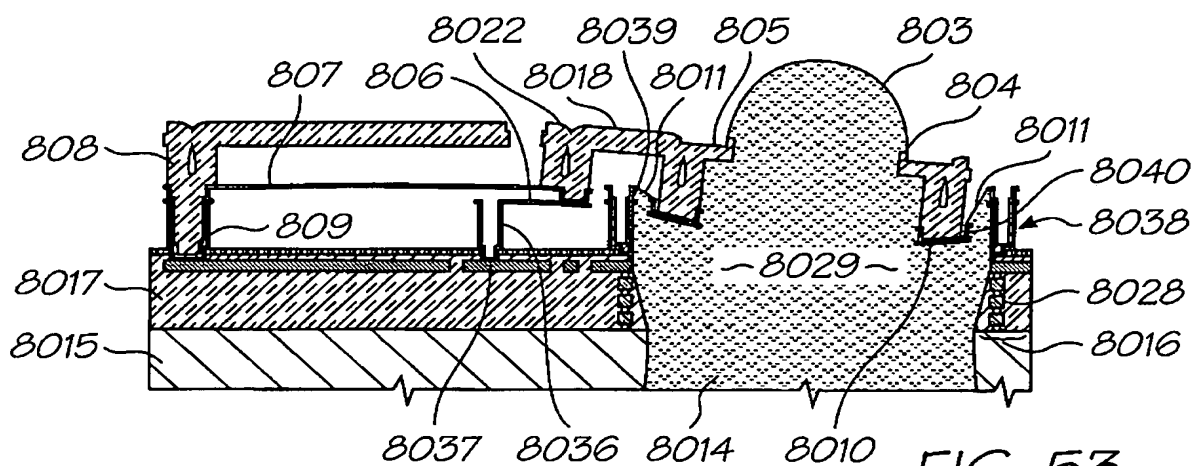


FIG. 53

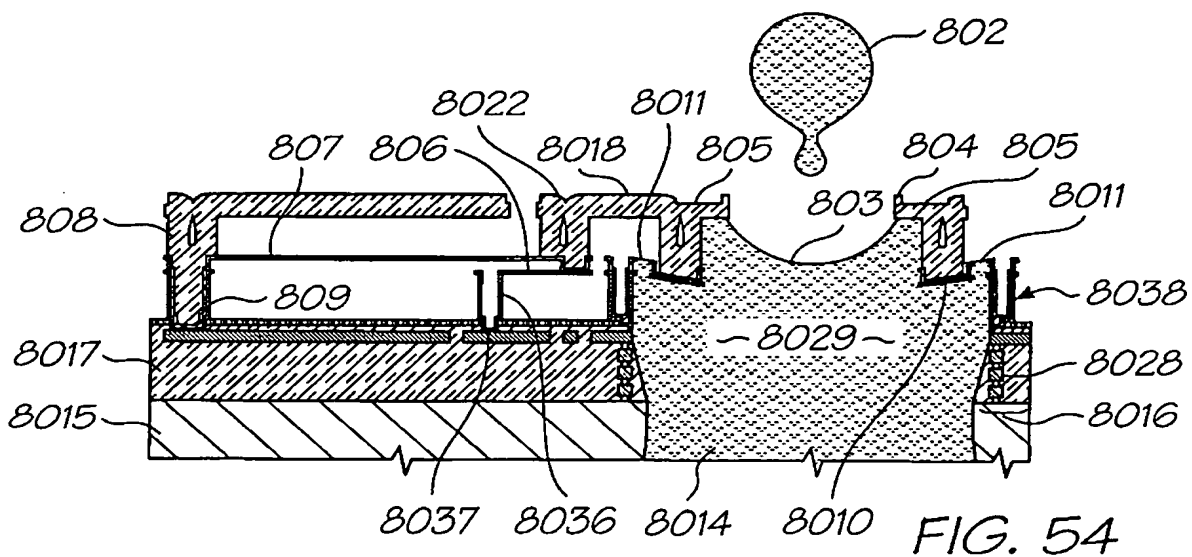


FIG. 54

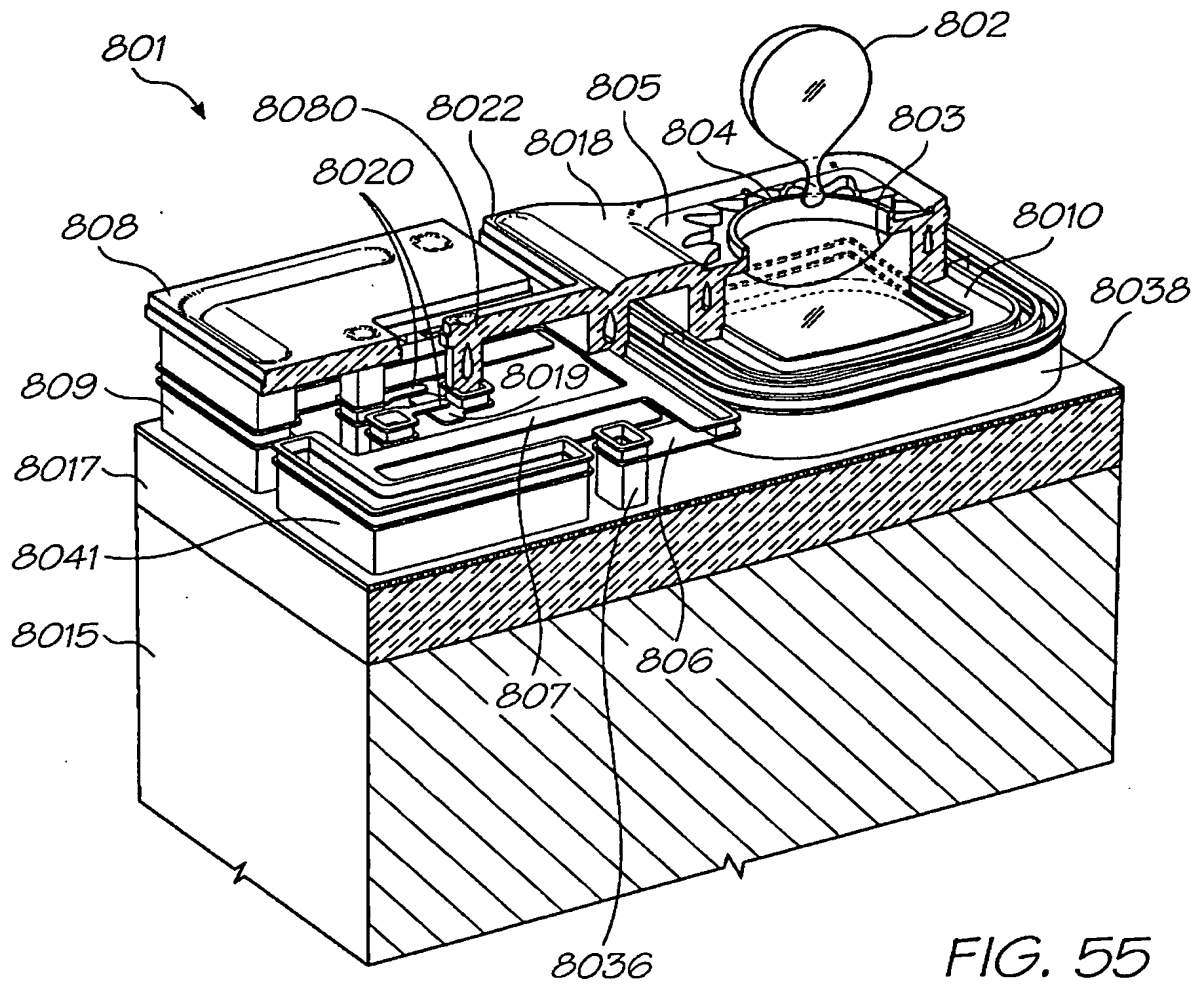


FIG. 55





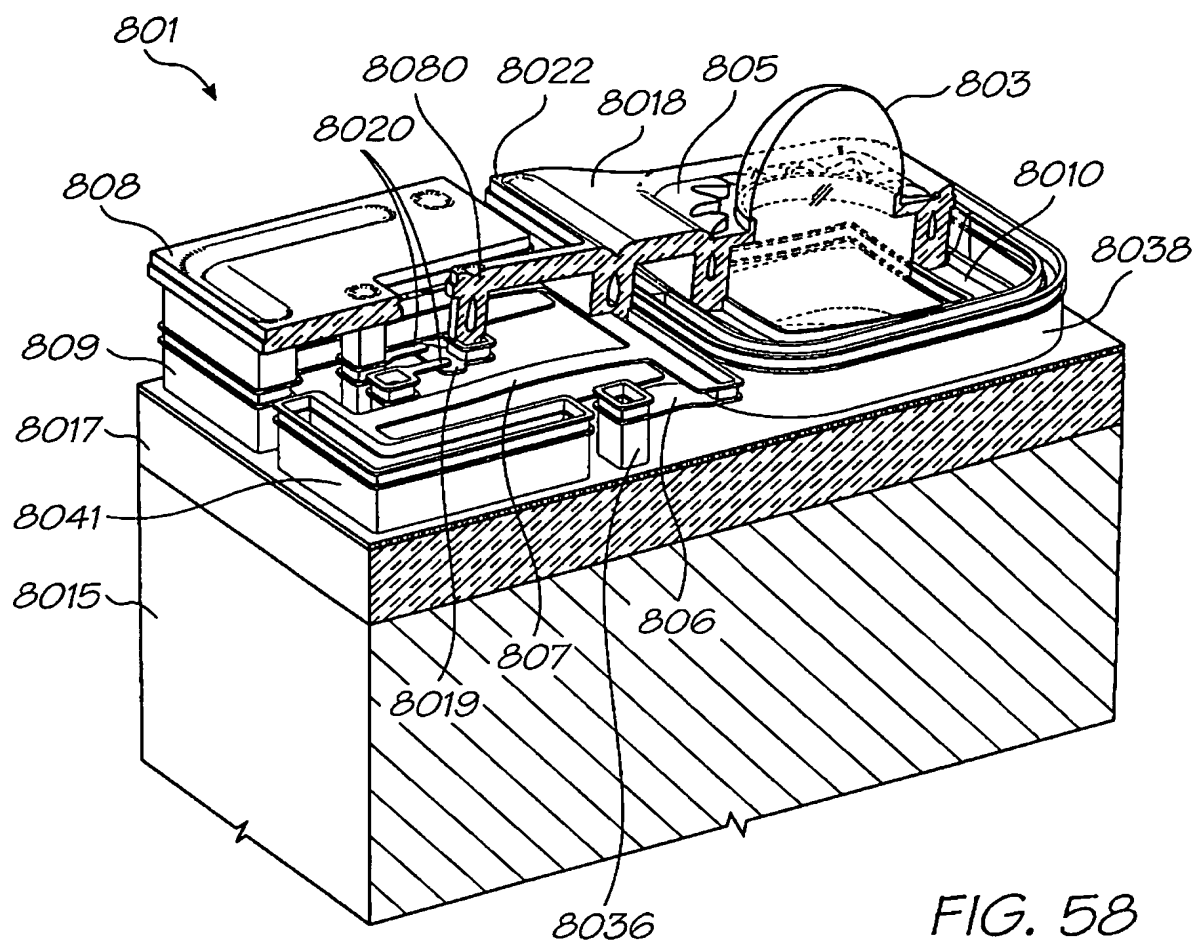


FIG. 58

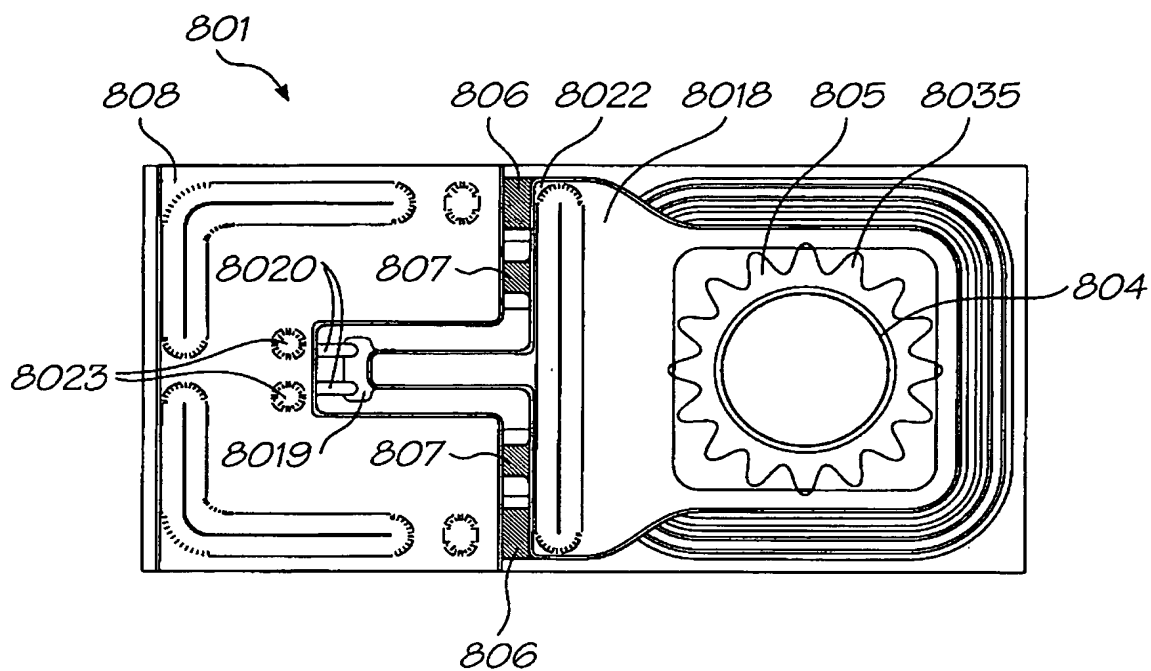


FIG. 59


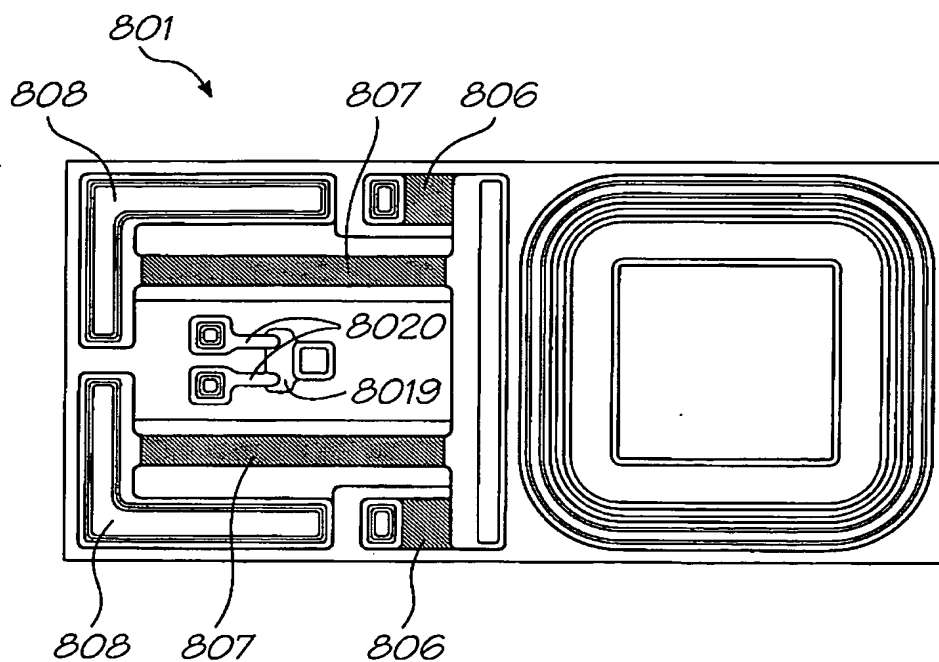


FIG. 60

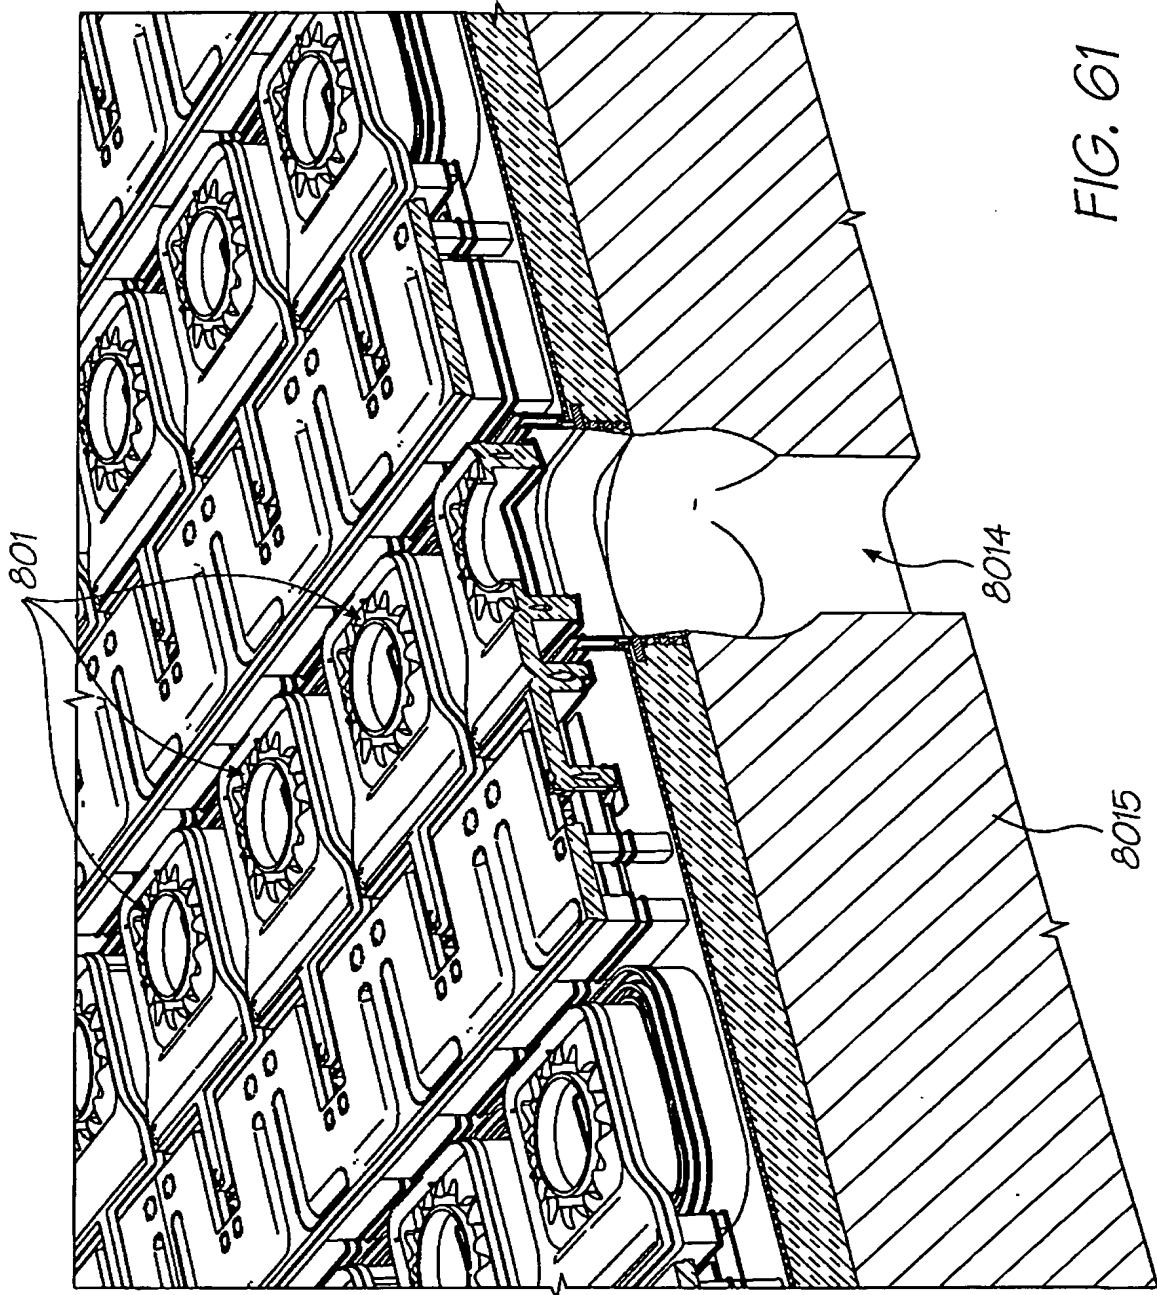

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**